




# BLS661WP Technical Specification




25T 6mm Output Shaft Spline

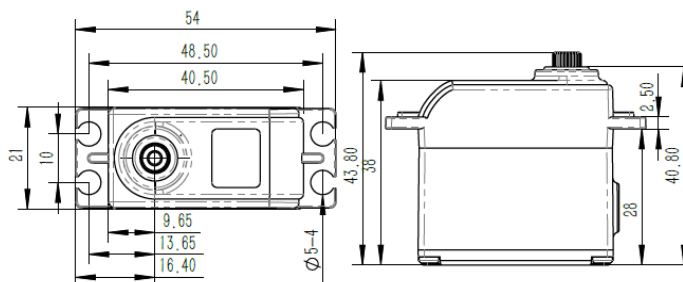

## 1. Operating Data

Rated Voltage	DC7.4V
Voltage Range	DC6.0V-8.4V
Stalling Torque	12.0Kgf.cm@6.0V
	16.0Kgf.cm@7.4V
	19.0Kgf.cm@8.4V
No-load Speed	0.12sec/60°@6.0V
	0.11sec/60°@7.4V
	0.10sec/60°@8.4V
Working Frequency	1520us/333Hz
Default Travel Angle	±50°=100°when1000us-2000u
Temperature Range	-20℃.....+65℃
Soft Start	Programmable
Programmable	Yes
Case Material	PA66
Motor Type	Brushless DC Motor
Gear Set Material	Hardened Steel
Waterproof level	IP67
Position Sensor	Potentiometer
Case Dimensions	40.5*21*40.5mm±0.2mm
Weight	61g±10%

## 2. Performance

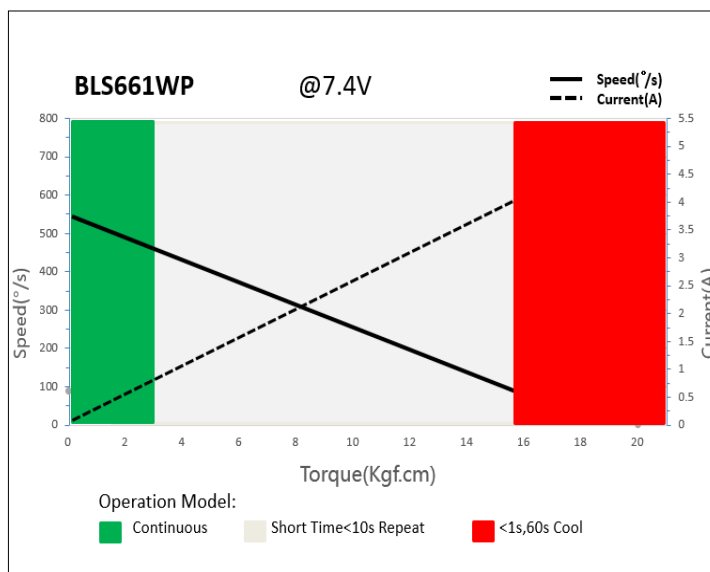

## 3. Command signal PWM Command Interface

Signal Voltage	HIGH: min.3.3V, max.5.0V Low: min.0.0V, max.1.5V
Pulse Lengths	900us-2100us
Pulse Lengths for Position	1000us/1500us/2000us -50°/ 0°/+50°

## 4. Electrical Connection

 3 2 1	Pin Assignment			
	1	Orange	Signal	PWM Command
	2	Red	DC+	Supply Voltage
	3	Brown	DC-	Supply Ground