

Protistor® size 20x127 gR (GRB/C/D)

1000 to 1500VDC

SEMICONDUCTOR PROTECTION FUSES

IEC HIGH-SPEED CYLINDRICAL FUSE-LINKS DC PROTECTION



Specially developed for DC applications, 20x127 gR cylindrical is a fast acting, full range fuse used in the protection of auxiliaries, control circuit and other measuring and monitoring devices.

TECHNICAL DATA OVERVIEW

Voltage Range DC	1000 ... 1500 VDC
Ampere Range (A)	1.5 ... 63 A
Speed/Characteristic	gR
Product Size	20x127 mm

FEATURES & BENEFITS

- International 20x127mm (13/16" x 5") for worldwide acceptance
- gR Class according to VDE 636-23 and IEC 60269-4
- Low I^2t for improved semiconductor protection
- Eliminate all overloads
- Extremely fast acting
- Current limiting
- Excellent cycling capability

APPLICATIONS

- DC control circuit, measuring & monitoring auxiliaries circuit

STANDARDS

- UL Recognized for some ratings
- UL file No. E76491
- IEC 60269-4 Compliance



Protistor® size 20x127 gR (GRB/C/D)

1000 to 1500VDC

PRODUCT RANGE



FD20GB100V6T

Size 20x127 gR 1000VDC with striker

Catalog number	Item number	Rated voltage DC (IEC)	Rated current I _n	Rated breaking capacity DC	Power dissipation at I _n	Package	Weight
FD20GB100V6T	Z088020	1000 V	6 A	100 kA	3.5 W	10	97 g
FD20GB100V8T	T088774	1000 V	8 A	100 kA	3.8 W	10	97 g
FD20GB100V10T	A089493	1000 V	10 A	100 kA	4.2 W	10	97 g
FD20GB100V12T	B089494	1000 V	12 A	100 kA	5.3 W	10	97 g
FD20GB100V16T	C089495	1000 V	16 A	100 kA	6.6 W	10	97 g
FD20GB100V20T	D089496	1000 V	20 A	100 kA	7.7 W	10	97 g
FD20GB100V25T	E089497	1000 V	25 A	100 kA	9 W	10	97 g
FD20GB100V32T	F089498	1000 V	32 A	100 kA	10.5 W	10	97 g
FD20GC100V40T	S086795	1000 V	40 A	100 kA	13.2 W	10	97 g
FD20GC100V50T	F086186	1000 V	50 A	100 kA	15.5 W	10	97 g
FD20GC100V63T	F083656	1000 V	63 A	100 kA	17.4 W	10	97 g

Size 20x127 gR 1000VDC without striker

Catalog number	Item number	Rated voltage DC (IEC)	Rated current I _n	Rated breaking capacity DC	Power dissipation at I _n	Package	Weight
FD20GB100V6	N089482	1000 V	6 A	100 kA	3.5 W	10	0.1 kg
FD20GB100V8	P089483	1000 V	8 A	100 kA	3.8 W	10	0.1 kg
FD20GB100V10	Q089484	1000 V	10 A	100 kA	4.2 W	10	0.1 kg
FD20GB100V12	R089485	1000 V	12 A	100 kA	5.3 W	10	0.1 kg
FD20GB100V16	S089486	1000 V	16 A	100 kA	6.6 W	10	0.1 kg
FD20GB100V20	T089487	1000 V	20 A	100 kA	7.7 W	10	0.1 kg
FD20GB100V25	V089488	1000 V	25 A	100 kA	9 W	10	0.1 kg
FD20GB100V32	W089489	1000 V	32 A	100 kA	10.5 W	10	0.1 kg
FD20GC100V40	Z087054	1000 V	40 A	100 kA	13.2 W	10	0.1 kg
FD20GC100V50	K083660	1000 V	50 A	100 kA	15.5 W	10	0.1 kg
FD20GC100V63	J083659	1000 V	63 A	100 kA	17.4 W	10	0.1 kg

Size 20x127 gR 1500VDC with striker

Catalog number	Item number	Rated voltage DC (IEC)	Rated current I _n	Rated breaking capacity DC	Power dissipation at I _n	Design	Package	Weight
FD20GB150V1,5T	G075745	1500 V	1.5 A	30 kA	1.4 W	gRB	10	97 g
FD20GB150V2T	B088367	1500 V	2 A	30 kA	1.6 W	gRB	10	97 g
FD20GB150V3,15T	H075746	1500 V	3.15 A	30 kA	2.1 W	gRB	10	97 g
FD20GB150V4T	J075747	1500 V	4 A	30 kA	2.1 W	gRB	10	97 g
FD20GB150V5T	C088368	1500 V	5 A	30 kA	2.3 W	gRB	10	97 g

Protistor® size 20x127 gR (GRB/C/D)

1000 to 1500VDC

PRODUCT RANGE

Size 20x127 gR 1500VDC without indicator


Catalog number	Item number	Rated voltage DC (IEC)	Rated current I _n	Rated breaking capacity DC	Power dissipation at I _n	Design	Package	Weight
FD20GB150V1,5	K081843	1500 V	1.5 A	30 kA	1.4 W	gRB	10	97 g
FD20GB150V2	Y099243	1500 V	2 A	30 kA	1.6 W	gRB	10	97 g
FD20GB150V3,15	L081844	1500 V	3.15 A	30 kA	2.1 W	gRB	10	97 g
FD20GB150V4	Z099244	1500 V	4 A	30 kA	2.1 W	gRB	10	97 g
FD20GB150V5	A099245	1500 V	5 A	30 kA	2.3 W	gRB	10	97 g
FD20GD150V6	E082804	1500 V	6 A	30 kA	6.3 W	gRD	10	97 g
FD20GD150V8	Z080867	1500 V	8 A	30 kA	6 W	gRD	10	97 g
FD20GD150V10	F081655	1500 V	10 A	30 kA	6.1 W	gRD	10	97 g
FD20GD150V12	B080593	1500 V	12 A	30 kA	6.8 W	gRD	10	97 g
FD20GD150V16	Q081457	1500 V	16 A	30 kA	8.9 W	gRD	10	97 g
FD20GD150V20	D082803	1500 V	20 A	30 kA	9.6 W	gRD	10	97 g
FD20GD150V25	A080431	1500 V	25 A	30 kA	12 W	gRD	10	97 g

TECHNICAL DATA

	Size 20x127 gR 1000VDC with striker	Size 20x127 gR 1000VDC without striker	Size 20x127 gR 1500VDC with striker	Size 20x127 gR 1500VDC without indicator
Ampere Range (A)	6 ... 63 A	6 ... 63 A	1.5 ... 5 A	1.5 ... 25 A

TIME CURRENT CHARACTERISTIC CURVES

Size 20x127 gR 1000VDC 6A to 32A

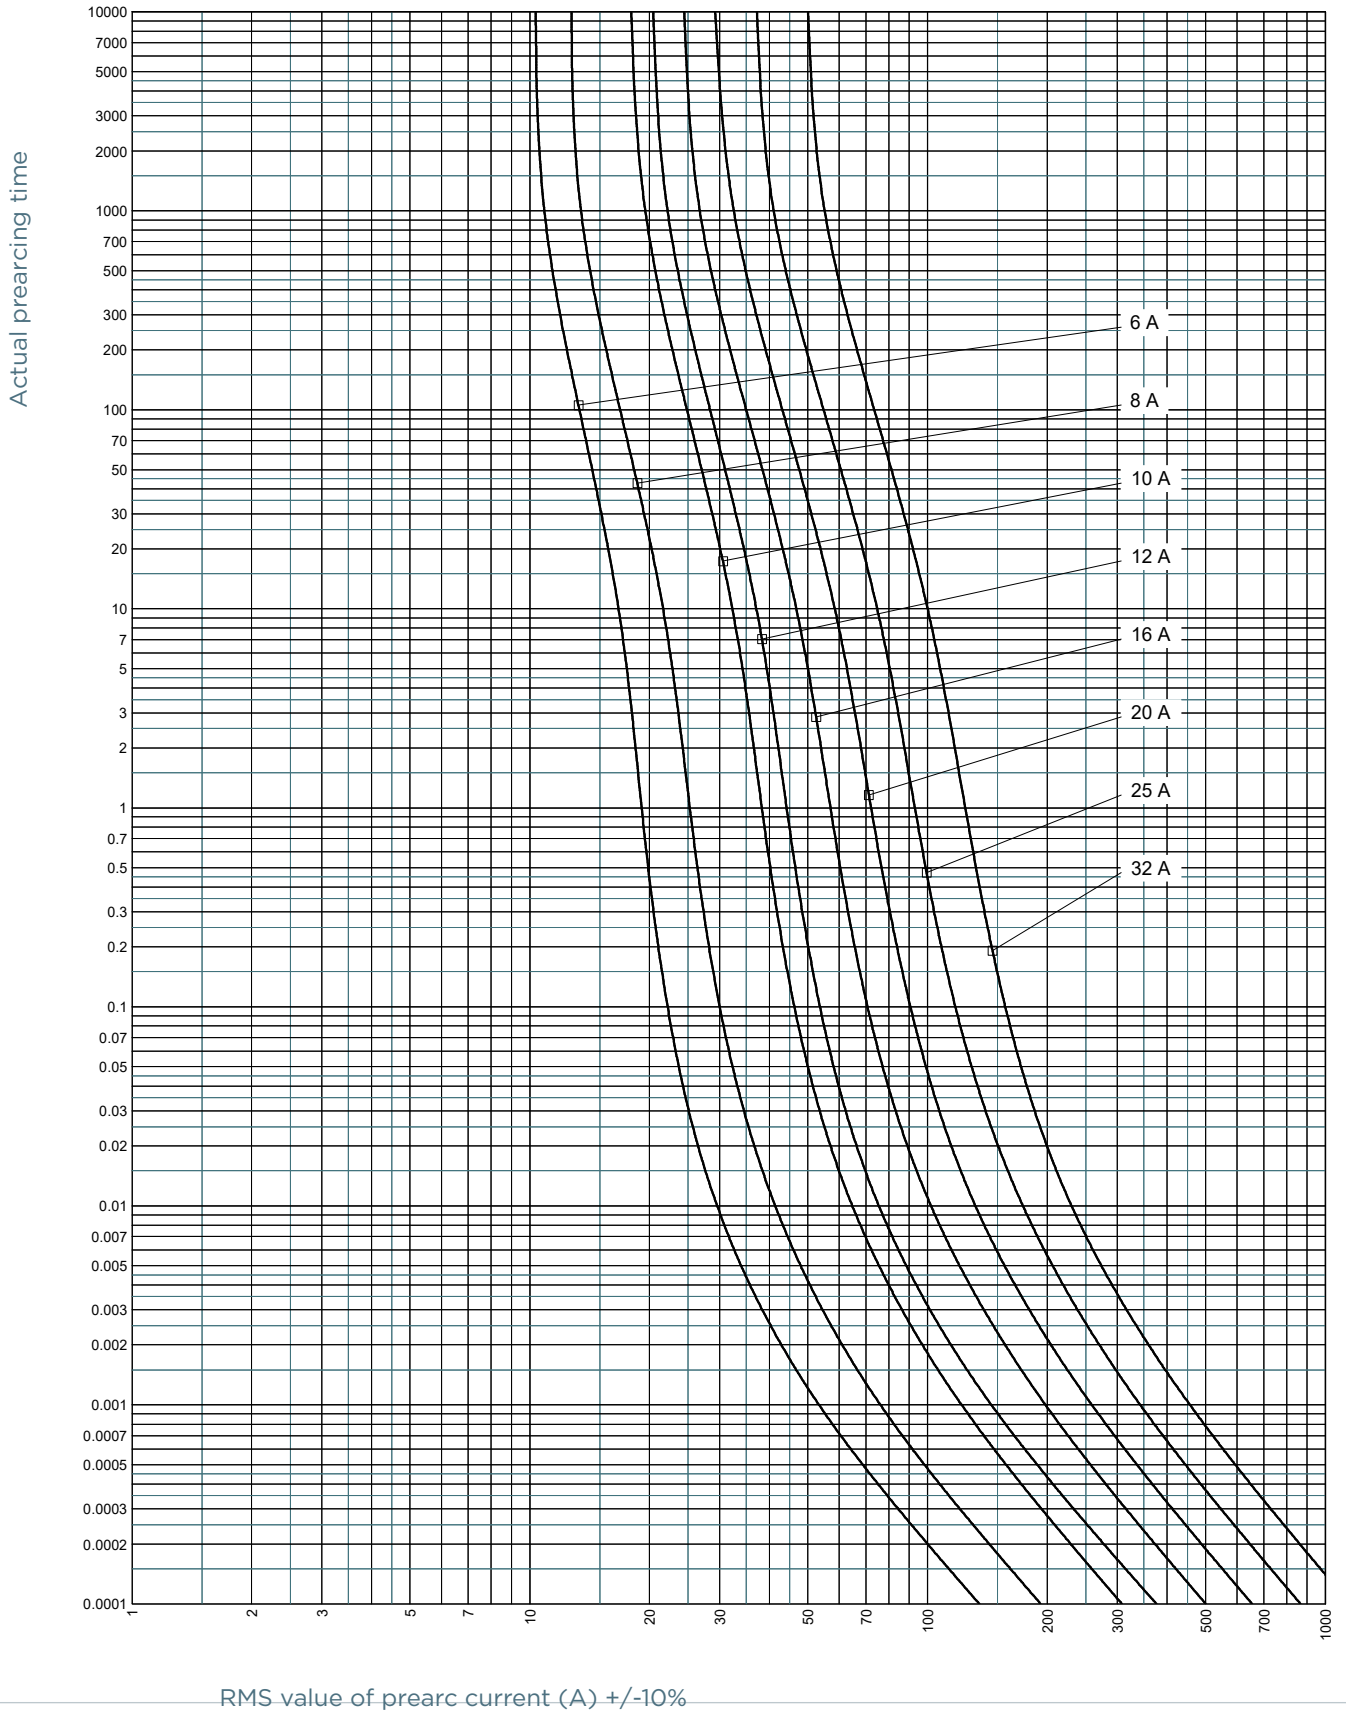


RMS value of prearc current (A) +/-10%

Protistor® size 20x127 gR (GRB/C/D)

1000 to 1500VDC

TIME CURRENT CHARACTERISTIC CURVES

Size 20x127 gR 1000VDC 40A to 63A

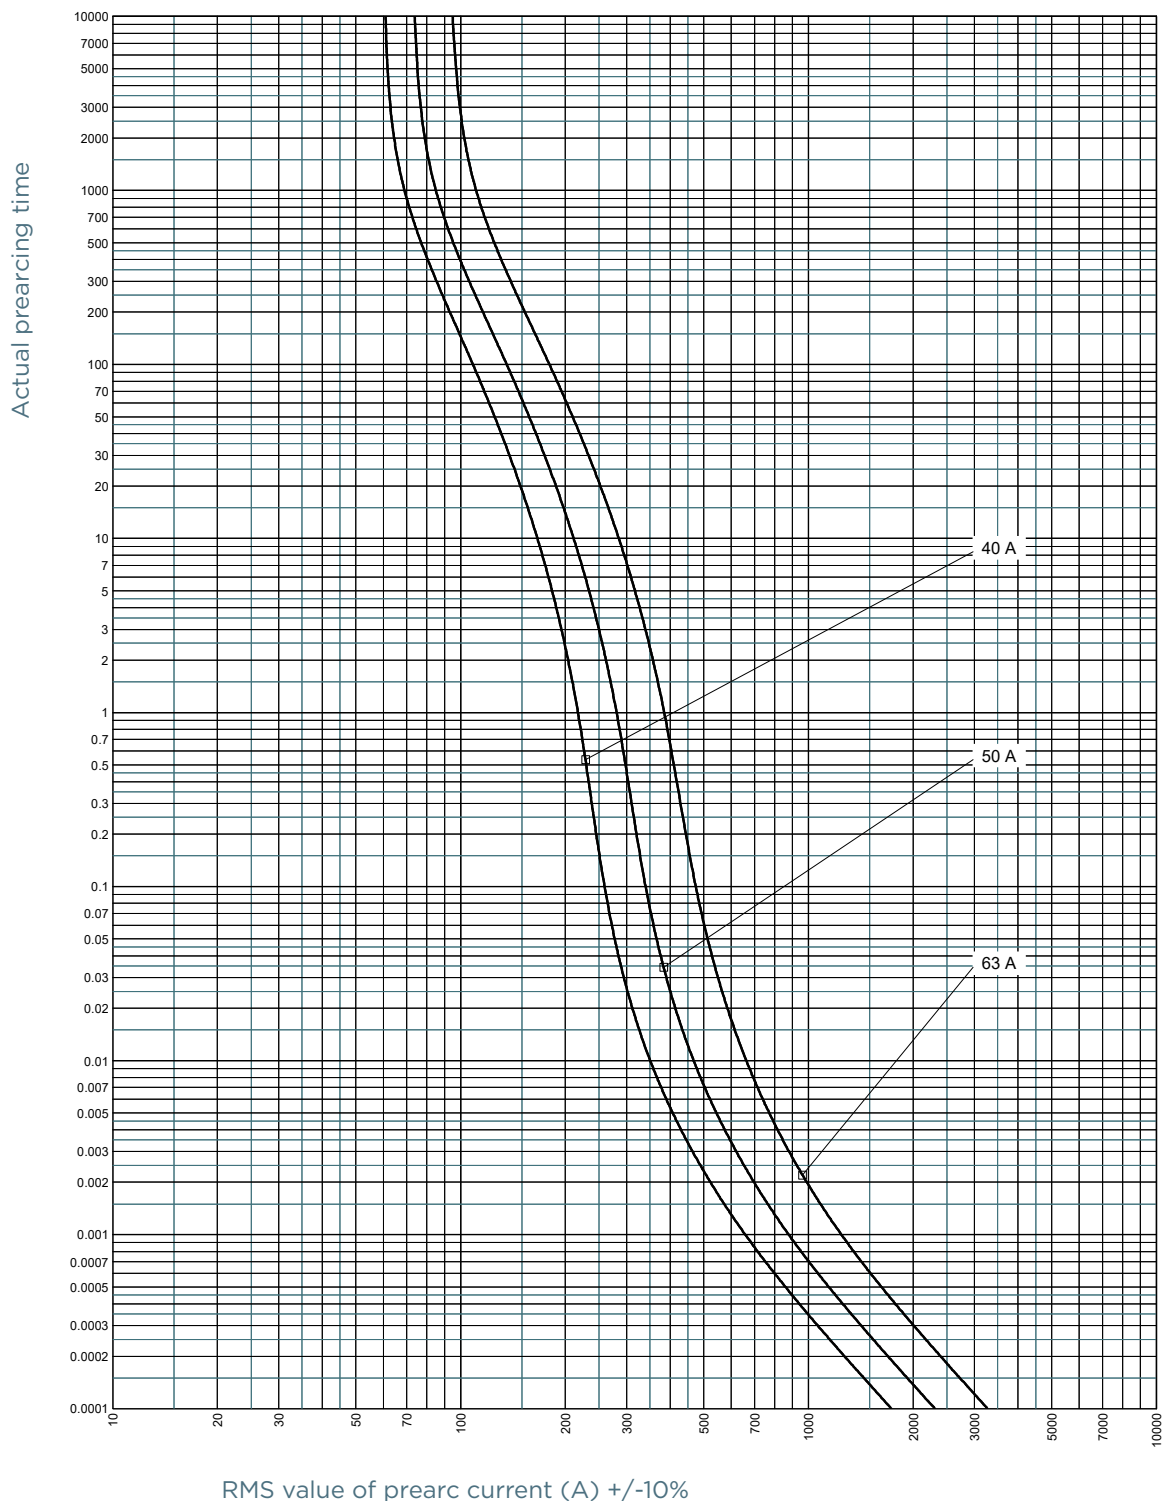


Protistor® size 20x127 gR (GRB/C/D)

1000 to 1500VDC

TIME CURRENT CHARACTERISTIC CURVES

Size 20x127 1500VSC 1,5A to 5A with or without striker

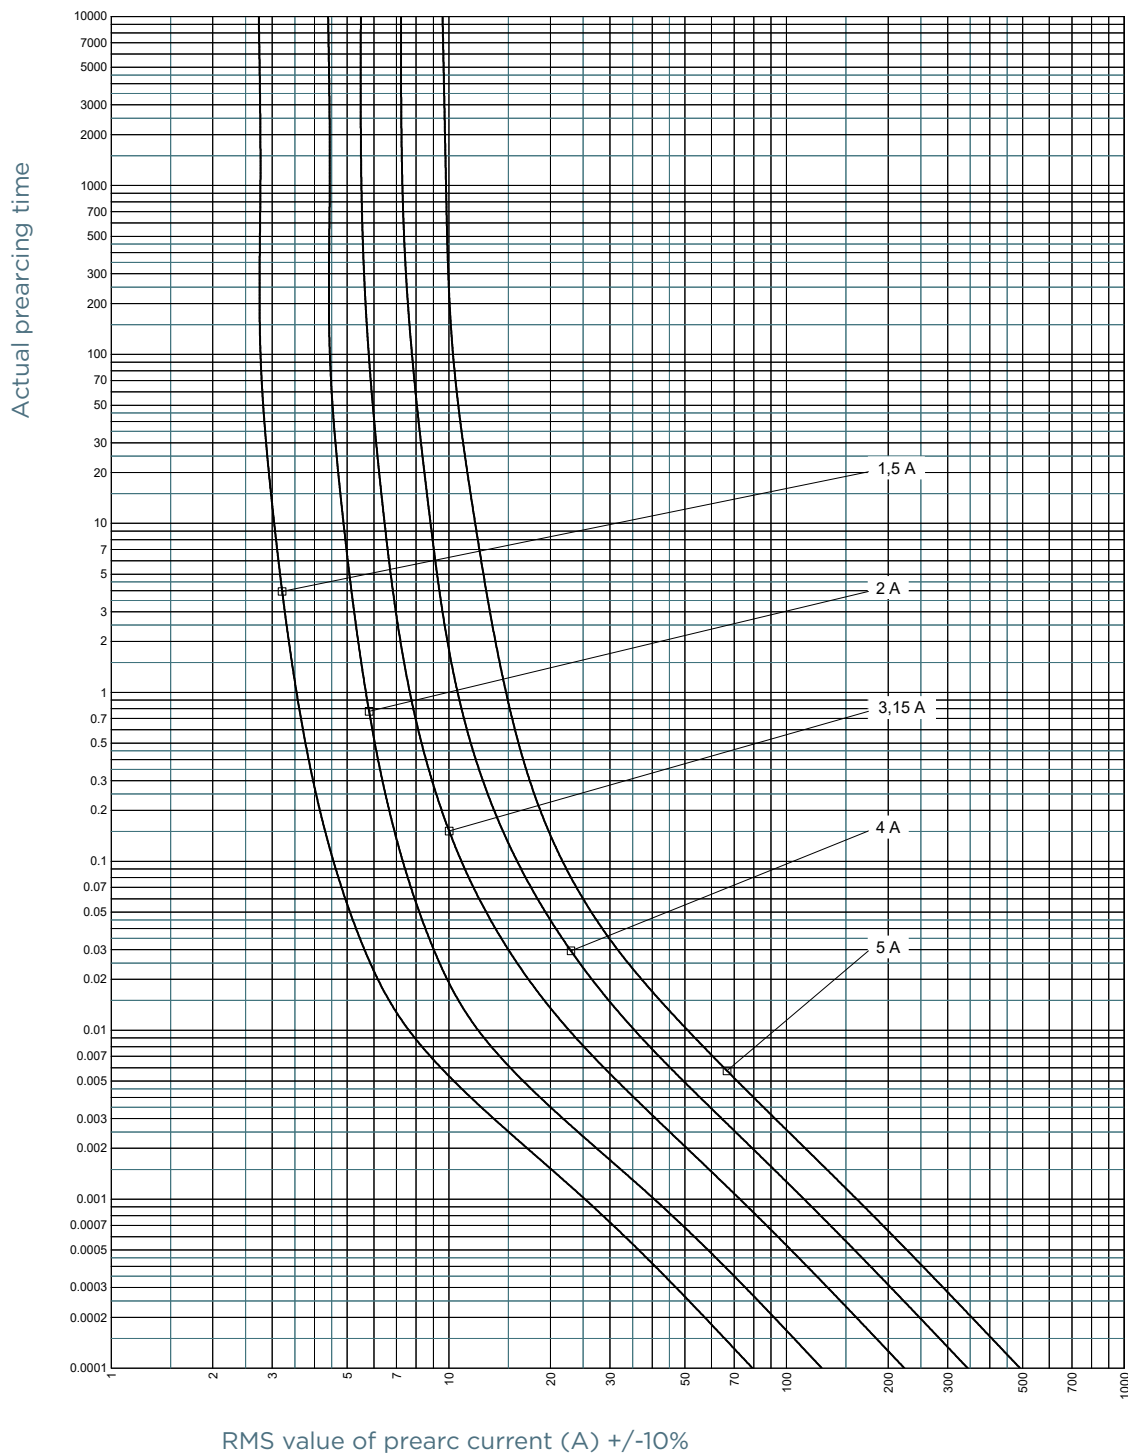


Protistor® size 20x127 gR (GRB/C/D)

1000 to 1500VDC

TIME CURRENT CHARACTERISTIC CURVES

Size 20x127 1500VDC 6A to 25A without striker

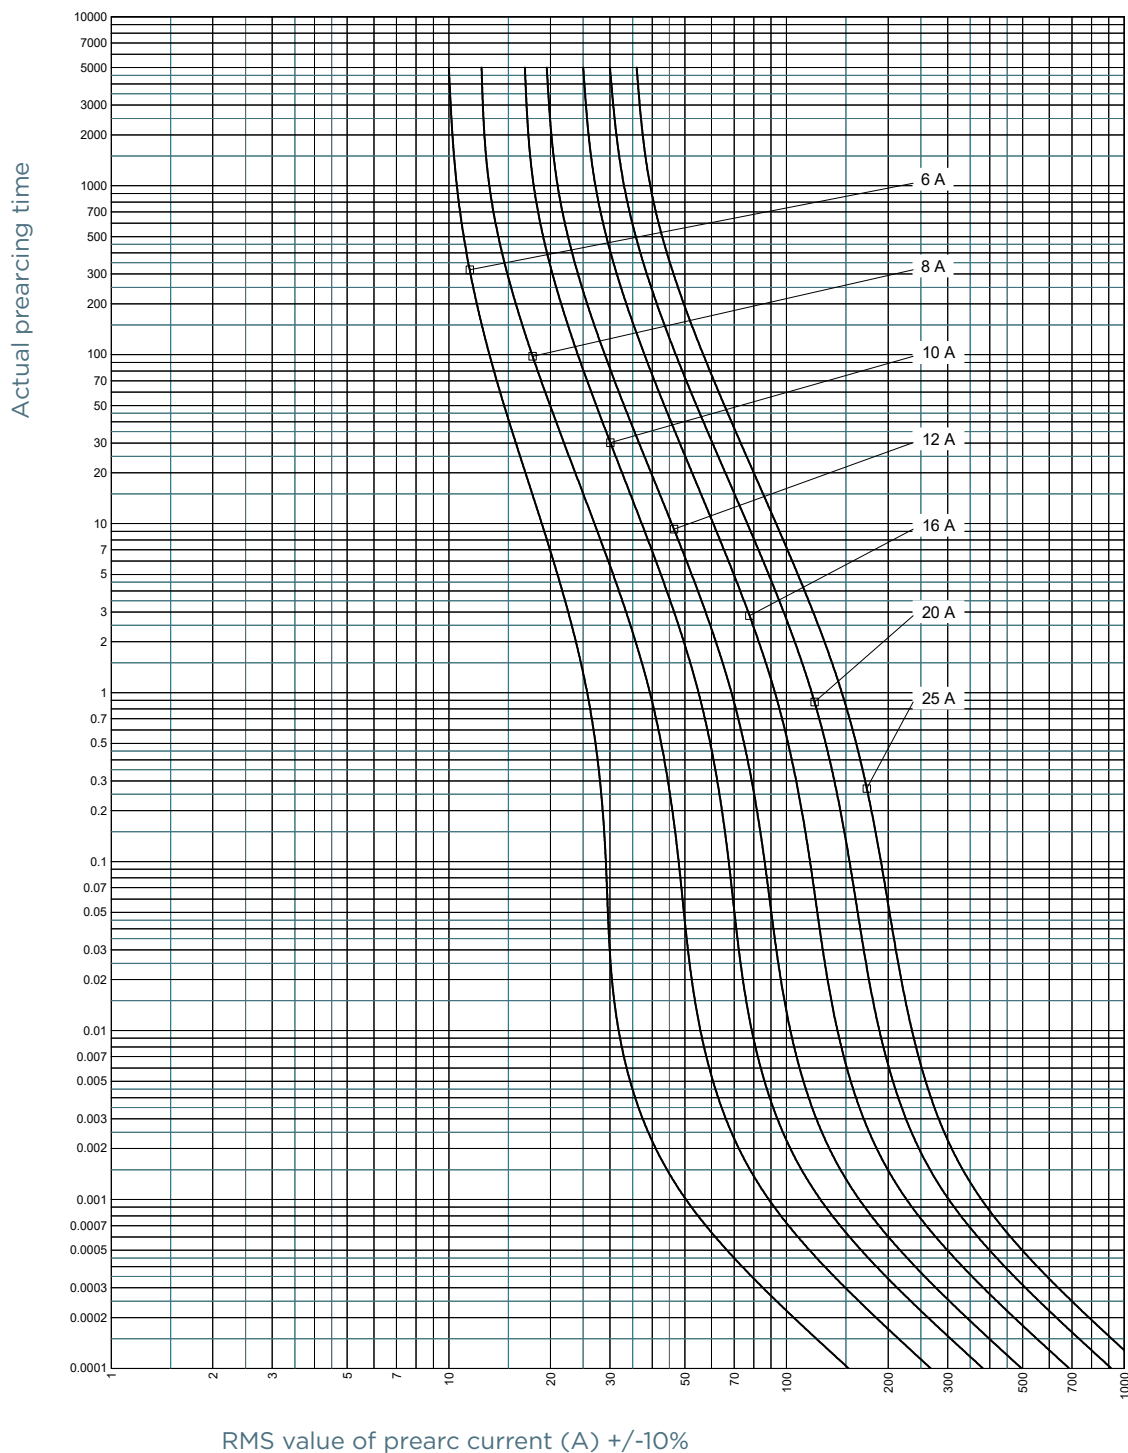


Protistor® size 20x127 gR (GRB/C/D)


1000 to 1500VDC

L/R TIME CONSTANT VS DC VOLTAGE CAPABILITY

Size 20x127 gR 1000VDC

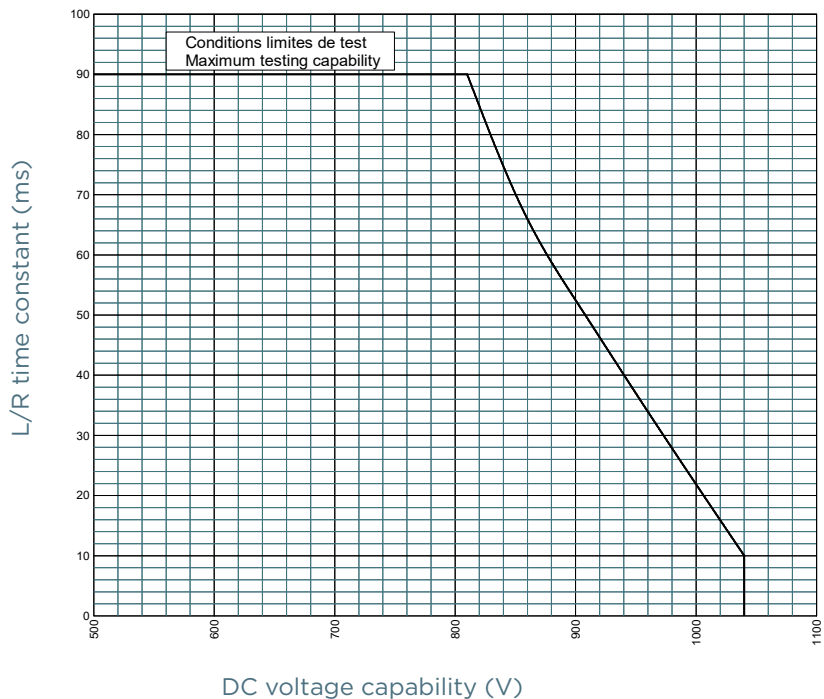

Size 20x127 gR 1500VDC 1,5A to 5A

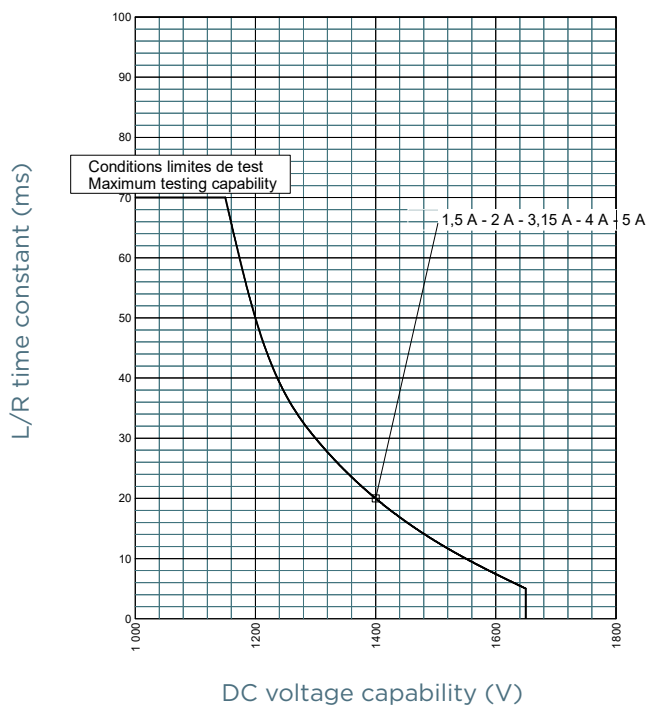


Protistor® size 20x127 gR (GRB/C/D)

1000 to 1500VDC


L/R TIME CONSTANT VS DC VOLTAGE CAPABILITY

Size 20x127 gR 1500VDC 6A to 25A

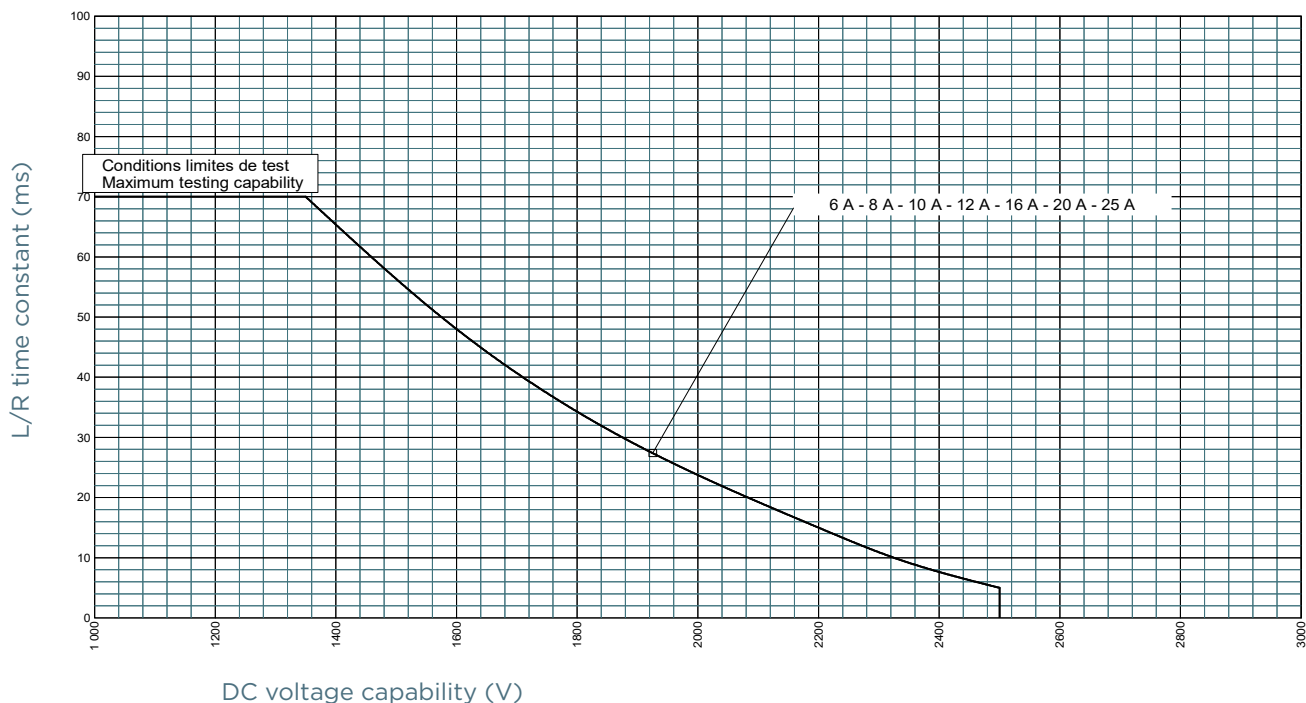

POWER DISSIPATION

Size 20x127 gR 1000VDC

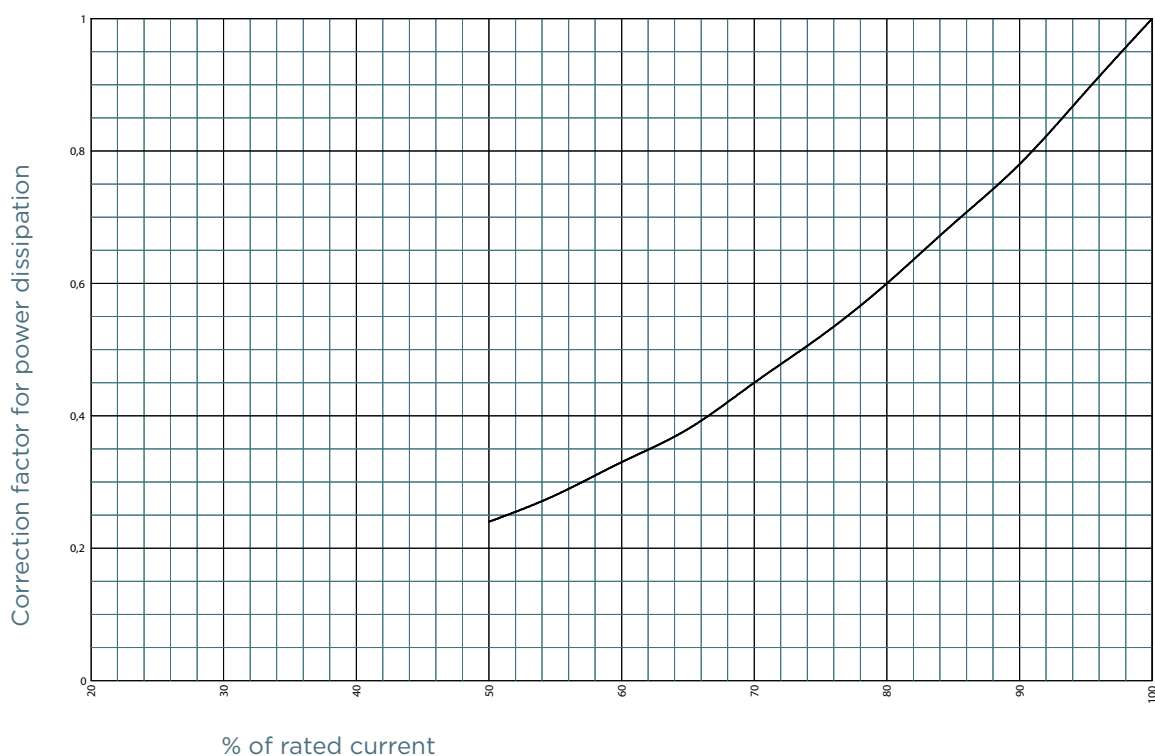


Protistor® size 20x127 gR (GRB/C/D)

1000 to 1500VDC

POWER DISSIPATION

Size 20x127 gR 1500VDC 1,5A to 5A

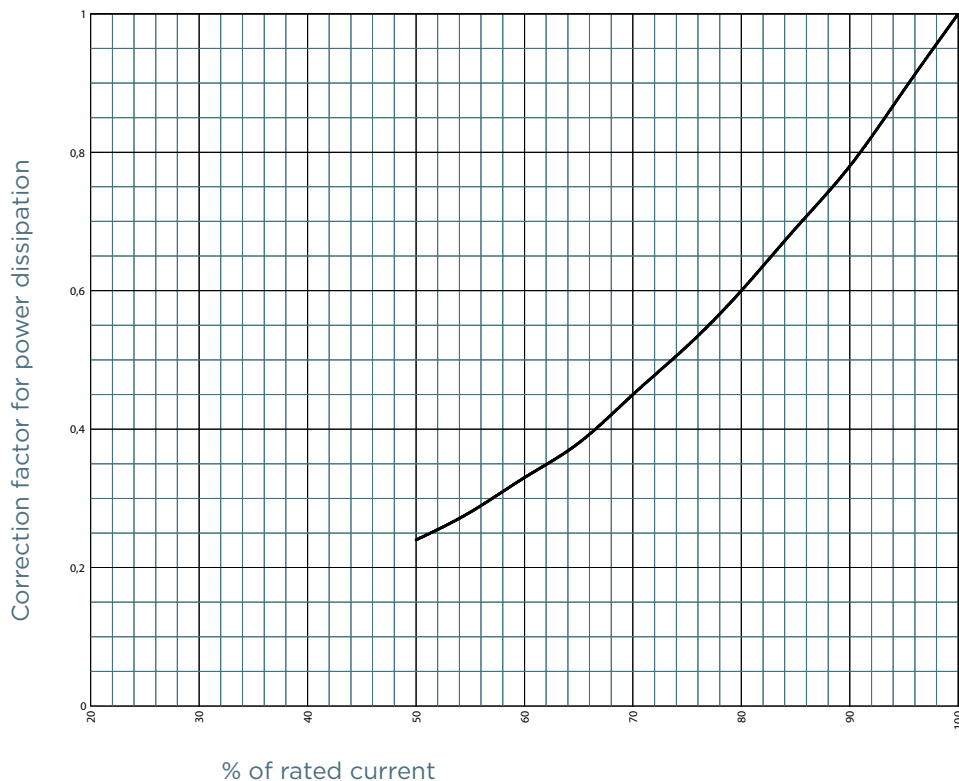

Size 20x127 gR 1500VDC 6A to 25A

