




梓希电气®
ZIXI ELECTRICAL

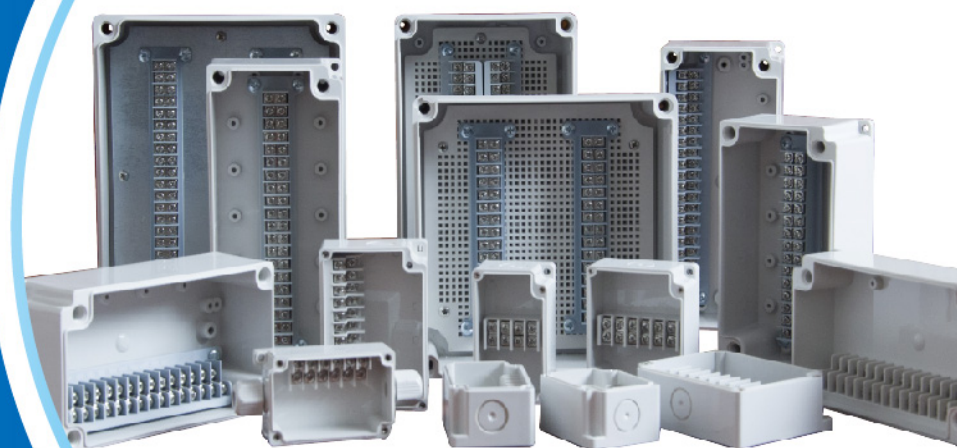

产品综合选型手册

INTEGRATED PRODUCT SELECTION GUIDE

上海梓希电气有限公司

SHANGHAI ZIXI ELECTRIC CO., LTD



地址：上海市松江区九亭镇连富路1589号

电话：021-67758972 021-67811336

传真：021-67758962

邮箱：yuanxq888@126.com

网址：www.zixidianqi.com

2016年11月

上海梓希电气有限公司
SHANGHAI ZIXI ELECTRIC CO., LTD

展望未来



所以專注！

关于我们

—— About us

上海梓希电气有限公司是一家专业从事电气成套设备为主，在工业自动化控制领域从事工程设计，产品技术研发和自动化产品销售等业务，并承接各类工程项目以及项目改造的电气高新技术企业。

公司主要生产销售：IP67防水接线盒、铸铝接线盒、接线端子盒、按钮盒、配电箱、不锈钢机柜、IP68电缆防水接头、按钮开关等众多工控配套产品。公司以其对市场动态的深刻把握，凭借自身的锐意进取和日臻完善的管理与经营，服务于电子电气，通信，消防设备，控制配电盘，船舶，石油化工，大型工厂，沿海工厂，码头，水处理设施，环保设备等众多行业。

本公司防水接线盒拥有：防尘、防水、耐酸、耐碱、外型美观、品质稳定、良好的接地功能、完全绝缘不导电、抗撞击不变形等特点。其配件齐全，安装方便。牢固可靠，拆装方便，广泛应用于：控制箱、转接箱、拉线箱、分电箱、仪表箱、按钮开关箱、电路板专用箱等，通过不断的改进工艺，为我们的客户提供优质的选择。

我们拥有一支稳定性强素质高的技术队伍，善于学习、敢于创新、勇于实践，使公司在发展高科技、实现产业化走可持续发展道路上始终保持着旺盛的生命力。

公司秉承“为顾客创造价值，为员工创造平台，为社会创造效益”的宗旨与“尊重、信任、沟通、学习”的团队精神与管理理念，愿在真诚互信的基础上，与国内外合作者、员工一同成长，携手共创美好明天。

Shanghai zixi electric co., LTD. Is a professional engaged in electrical equipment is given priority to, in the field of industrial automation control in engineering design, product technology research and development and automation products sales and other business and undertake various projects and project reconstruction of electrical high-tech enterprises.

The company mainly produces sales: waterproof IP67 junction box, aluminum box, terminal boxes, button box, distribution box, stainless steel cabinet, IP68 waterproof cable connectors, push button switch, and many other industrial products. Company with its deep grasp of market dynamics, with the own forge ahead and perfected management and operation, in the service of electronic electrical, communications, fire equipment, control panel, Marine, petrochemical industry, large factories, coastal factories, docks, water treatment facilities, environmental protection equipment and many other industries.

Our company have: waterproof connector dustproof, waterproof, acid and alkali resistance, good appearance, stable quality, good grounding function, completely insulated non-conductive and impact resistance to deformation, etc. Its fittings is complete, convenient installation, firm and reliable, tear open outfit is convenient, widely used in: control box, transfer boxes, draw box, distribution box, meter boxes, button switch box, special circuit board box, etc., through the continuous improvement process, choose for our OEM customers to provide quality. We have a strong stability of high quality technical team, good at learning, dare to innovation, bold practice, make the company in the development of high-tech and realizing industrialization path of sustainable development has always maintained a strong vitality.


Companies adhering to the "create value for customers, create a platform for employees, create benefit for the society" with the aim of "respect, trust, communication, learning" the team spirit and management idea, is willing to sincerely on the basis of mutual trust, with the domestic and foreign partners, employees grow together, to join hands in creating a better tomorrow.

IP. IK保护等级 Ingress Protection Grade

Protection class of enclosure in accordance with EN 60592,EN50102 standard

1 FIRST NUMBER	固体保护程度 Protection against solid	2 SECOND NUMBER	液体保护程度 Protection against liquids	IK CODE	冲击保护 Protection against mechanical impact
IP	测试 (TEST)	IP	测试 (TEST)	IK	测试 (TEST)
0	No protection	0	No protection	00	No protection
1	对50mm以上固体有保护 Protected against solid objects up to 50mm	1	垂直滴水保护 Protected against vertically falling drops water	01-05	冲击<1 joule Impact<1 joule
2	对12mm以上固体有保护 Protected against solid objects up to 12mm	2	15° 角度滴水有保护 Protected against vertically falling drops water when enclosure tilted up to 15°	06	冲击=1 joule Impact=1 joule
3	对2.5mm以上固体有保护 Protected against solid objects up to 2.5mm	3	60° 角度滴水有保护 Protected against vertically falling drops water when enclosure tilted up to 60°	07	冲击=2 joule Impact=2 joule
4	对1mm以上固体有保护 Protected against solid objects up to 1mm	4	任何方向滴水有保护 Protected against splashing water	08	冲击=5 joule Impact=5 joule
5	对灰尘以外固体有保护 Protected against dust limited ingress	5	任何方向低压喷水有保护 Protected against low pressure jets of water from all directions limited ingress	09	冲击=10 joule Impact=10 joule
6	对固体完全保护, 包括灰尘 Totally protected against dust	6	任何方向高压喷水有保护 Protected against water jets	10	冲击=20 joule Impact=20 joule
		7	15cm-1m深度完全浸入水中30分钟有保护 Protected against the effect of immersion between 15cm and 1m		
		8	长期完全浸水有保护 Protected against long periods of immersion under pressure		

以及适应不同的工作环境
不同材料机箱有不同的机械强度

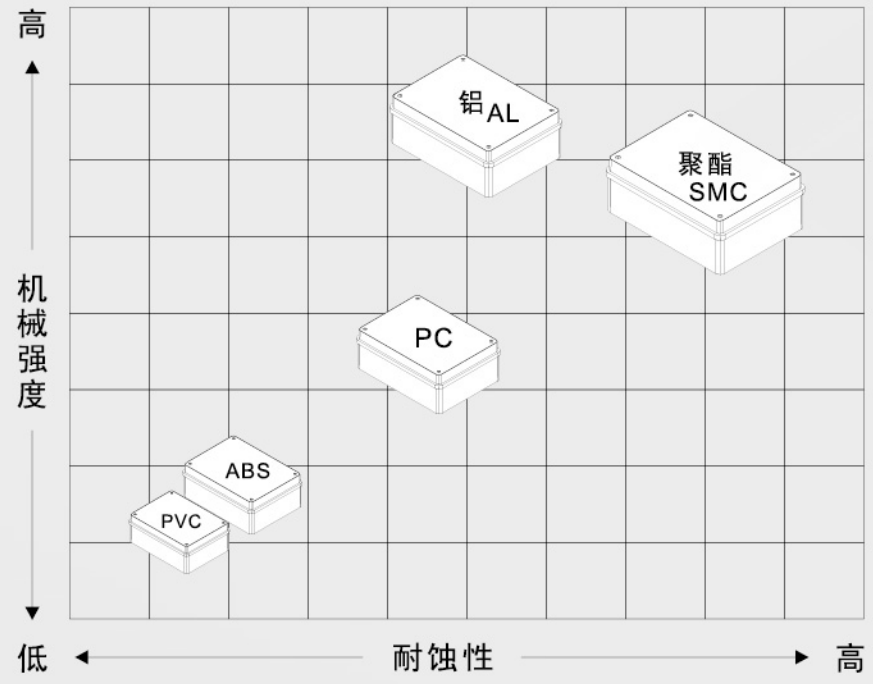

塑料密封箱 (P系列)..... 01-02

塑料密封箱 (S系列)..... 03-06

塑料密封箱 (H系列)..... 07-10

塑料密封箱 (C、K系列)..... 11-12

端子接线盒..... 13-19

开关按钮盒..... 20-20

铸铝盒..... 21-24

聚酯接线盒..... 25-25

手持式机箱..... 26-26

工业插座箱..... 27-28

透明保护窗罩..... 29-34

玻璃纤维箱..... 35-36

电缆防水接头..... 37-40

小型金属接线盒..... 41-41

挂墙式机箱..... 42-42

站立式机箱..... 43-43

站立式机柜/AR6000控制台..... 44-44

拆装式机柜..... 45-45

不锈钢机箱..... 46-46

不锈钢机柜..... 47-47

导轨机柜..... 48-49


机箱/机柜配件..... 50-51

产品目录
Product contents

上海梓希电气有限公司
SHANGHAI ZIXI ELECTRIC CO.,LTD

ZIXI塑料产品型号命名

ZX-ATH-192813

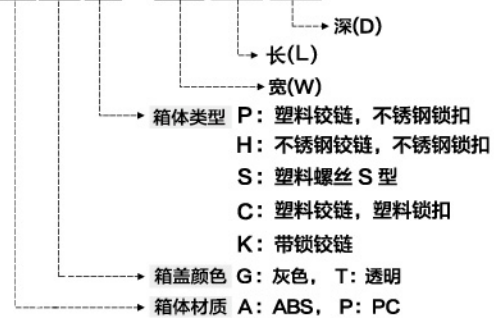

型号规格 Model and size



Size	产品型号 Product model (Screw type)				内板型号 Plate Model		金属内板规格 Plate Size	
W H D	ABS	PC/ABS	PC	PC	Plastic(塑料)	Metal(金属)	M1	M2
	盖: 灰色ABS 盒体: 灰色ABS Cover: Grey ABS Body: Grey ABS	盖: 透明PC 盒体: 灰色ABS Cover: Transparent PC Body: Grey ABS	盖: 灰色PC 盒体: 灰色PC Cover: Grey PC Body: Grey PC	盖: 透明PC 盒体: 灰色PC Cover: Transparent PC Body: Grey PC				
100 × 150 × 70	ZX-AGP-101507	ZX-ATP-101507	ZX-PGP-101507	ZX-PTP-101507	ZX - 1015P	ZX - 1015	77	127
100 × 200 × 70	ZX-AGP-102007	ZX-ATP-102007	ZX-PGP-102007	ZX-PTP-102007	ZX - 1020P	ZX - 1020	70	170
110 × 260 × 75	ZX-AGP-112607	ZX-ATP-112607	ZX-PGP-112607	ZX-PTP-112607	—	ZX - 1126	80	230
110 × 260 × 110	ZX-AGP-112610	ZX-ATP-112610	ZX-PGP-112610	ZX-PTP-112610	—	ZX - 1126	80	230
135 × 155 × 80	ZX-AGP-131508	ZX-ATP-131508	ZX-PGP-131508	ZX-PTP-131508	—	ZX - 1315	110	130
135 × 185 × 80	ZX-AGP-131808	ZX-ATP-131808	ZX-PGP-131808	ZX-PTP-131808	—	ZX - 1318	110	160
135 × 185 × 110	ZX-AGP-131810	ZX-ATP-131810	ZX-PGP-131810	ZX-PTP-131810	—	ZX - 1318	110	160
150 × 150 × 90	ZX-AGP-151509	ZX-ATP-151509	ZX-PGP-151509	ZX-PTP-151509	ZX - 1515P	ZX - 1515	120	120
170 × 220 × 110	ZX-AGP-172211	ZX-ATP-172211	ZX-PGP-172211	ZX-PTP-172211	ZX - 1722P	ZX - 1722	148	190
170 × 270 × 110	ZX-AGP-172711	ZX-ATP-172711	ZX-PGP-172711	ZX-PTP-172711	—	ZX - 1727	145	240
190 × 290 × 140	ZX-AGP-192914	ZX-ATP-192914	ZX-PGP-192914	ZX-PTP-192914	ZX - 1929P	ZX - 1929	160	260
250 × 300 × 150	ZX-AGP-253015	ZX-ATP-253015	ZX-PGP-253015	ZX-PTP-253015	ZX - 2530P	ZX - 2530	226	275
250 × 300 × 180	ZX-AGP-253018	ZX-ATP-253018	ZX-PGP-253018	ZX-PTP-253018	ZX - 2530P	ZX - 2530	226	275
250 × 350 × 150	ZX-AGP-253515	ZX-ATP-253515	ZX-PGP-253515	ZX-PTP-253515	ZX - 2535P	ZX - 2535	215	315
250 × 350 × 180	ZX-AGP-253518	ZX-ATP-253518	ZX-PGP-253518	ZX-PTP-253518	ZX - 2535P	ZX - 2535	215	315
290 × 190 × 140	ZX-AGP-291914	ZX-ATP-291914	ZX-PGP-291914	ZX-PTP-291914	ZX - 2919P	ZX - 2919	260	160
290 × 390 × 160	ZX-AGP-293916	ZX-ATP-293916	ZX-PGP-293916	ZX-PTP-293916	ZX - 2939P	ZX - 2939	245	345
300 × 300 × 130	ZX-AGP-303013	ZX-ATP-303013	ZX-PGP-303013	ZX-PTP-303013	ZX - 3030P	ZX - 3030	300	300
300 × 300 × 180	ZX-AGP-303018	ZX-ATP-303018	ZX-PGP-303018	ZX-PTP-303018	ZX - 3030P	ZX - 3030	300	300
350 × 465 × 160	ZX-AGP-354616	ZX-ATP-354616	ZX-PGP-354616	ZX-PTP-354616	ZX - 3546P	ZX - 3546	325	425
350 × 465 × 200	ZX-AGP-354620	ZX-ATP-354620	ZX-PGP-354620	ZX-PTP-354620	ZX - 3546P	ZX - 3546	325	425
530 × 630 × 185	ZX-AGP-536318	ZX-ATP-536318	ZX-PGP-536318	ZX-PTP-536318	—	ZX - 5363	460	560
530 × 630 × 255	ZX-AGP-536325	ZX-ATP-536325	ZX-PGP-536325	ZX-PTP-536325	—	ZX - 5363	460	560
530 × 730 × 185	ZX-AGP-537318	ZX-ATP-537318	ZX-PGP-537318	ZX-PTP-537318	—	ZX - 5373	460	660
530 × 730 × 255	ZX-AGP-537325	ZX-ATP-537325	ZX-PGP-537325	ZX-PTP-537325	—	ZX - 5373	460	660
630 × 830 × 185	ZX-AGP-638318	ZX-ATP-638318	ZX-PGP-638318	ZX-PTP-638318	—	ZX - 6383	560	760
630 × 830 × 255	ZX-AGP-638325	ZX-ATP-638325	ZX-PGP-638325	ZX-PTP-638325	—	ZX - 6383	560	760

产品特征 Product characteristics





1. 在箱体的上下位置为了达到更加有效的防护措施, 特别设计了防护突出层, 更加有效地防止水和灰尘的侵入。
2. 很容易将箱盖和箱体分开, 用户可以非常方便的进行加工和印刷作业。
3. 铰链与机箱体一体设计, 连接柱和锁扣等重要部件全部采用不锈钢材料, 非常坚固, 且具有抗腐蚀性功能。

1. It is designed to prevent the penetration of rain or perfectly double as roof is protruded form top and bottom of the base.
2. It is easy to separate cover and base so that user can attach or deteach them for processing and printing.
3. Insert hinge to the product and hinge connecting pin ang important of draw latch are made stanless so that it is very strong and corrosion resistant.



尺寸详解 (Detailed size)


Dimension (允许误差±1mm)

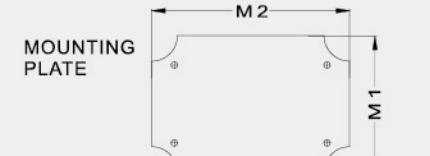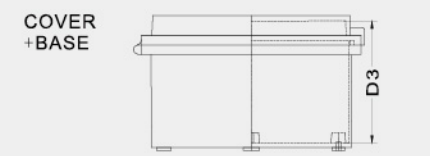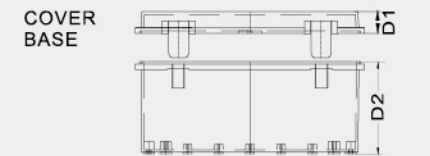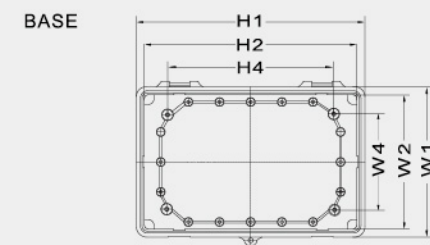


防尘防水等级	IP 66/67
冲击测试	IK 07/08
温度范围	ABS: -40~+85 PC: -40~+120
难燃性	ABS: 94-HB PC/ABS: 94-V-0~5VA PC: 94-HB.94-V-0~5VA

Size	Division	W1	W2	W4	H1	H2	H4	D1	D2	D3
100 × 150 × 70		100	80	—	150	130	100	20	50	52
100 × 200 × 70		100	78	—	200	180	150	20	50	52
110 × 260 × 75		110	90	40	260	240	180	20	55	54
110 × 260 × 110		110	90	40	260	240	180	30	80	94
135 × 155 × 80		136	118	97.5	156	138	97.5	20	60	67
135 × 185 × 80		136	118	100.7	156	168	131	20	60	67
135 × 185 × 110		136	118	100.7	156	168	131	20	90	97
150 × 150 × 90		150	130	100	150	130	100	20	70	70
170 × 220 × 110		170	152	—	220	202	162	30	80	90
170 × 270 × 110		170	152	120	270	252	100	30	80	90
190 × 290 × 140		190	162	126	290	265	210	30	110	120
250 × 300 × 150		250	242	230	300	292	282	40	110	130
250 × 300 × 180		250	242	230	300	292	282	40	140	160
250 × 350 × 150		250	232	175	350	335	275	40	110	130
250 × 350 × 180		250	232	175	350	335	275	40	140	160
290 × 190 × 140		290	265	210	190	162	126	30	110	120
290 × 390 × 160		290	264	215	390	374	315	28	132	144
300 × 300 × 130		330	308	280	330	308	280	30	100	110
300 × 300 × 180		330	308	280	330	308	280	30	150	160
350 × 465 × 160		372	350	295	482	460	410	30	130	140
350 × 465 × 200		372	350	295	482	460	410	30	170	180
530 × 630 × 185		530	488	426	640	588	526	35	150	170
530 × 630 × 255		530	488	426	640	588	526	35	220	240
530 × 730 × 185		588	488	426	740	688	626	35	150	166
530 × 730 × 255		588	488	426	740	688	626	35	220	236
630 × 830 × 185		628	588	528	838	788	726	35	150	170
630 × 830 × 255		628	588	528	838	788	726	35	220	270

适用附件 Accessories



Plastic mounting plate
塑料底板 (ABS)



Steel mounting plate
金属底板 (镀锌)



Wall brackets Plastic box
塑料盒不锈钢挂墙钩




Door hinge fixing piece
里门铰链固定件



Fixing bolts
里门固定架



Plastic latch
塑料搭扣

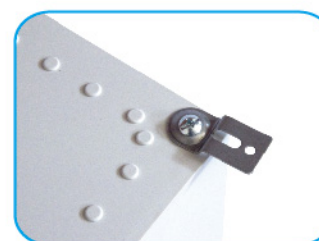



型号规格 Model and size



Size	产品型号 Product model (Screw type)				内板型号 Plate Model		金属内板规格 Plate Size	
	ABS	PC/ABS	PC	PC	Plastic(塑料)	Metal(金属)	M1	M2
	盖:灰色ABS 盒体:灰色ABS Cover:Grey ABS Body:Grey ABS	盖:透明PC 盒体:灰色ABS Cover:Transparent PC Body:Grey ABS	盖:灰色PC 盒体:灰色PC Cover:Grey PC Body:Grey PC	盖:透明PC 盒体:灰色PC Cover:Transparent PC Body:Grey PC				
★ 50×65×55	ZX-AGS-050605	ZX-ATS-050605	ZX-PGS-050605	ZX-PTS-050605	—	ZX-0506	40	55
55×70×43	ZX-AGS-050704	ZX-ATS-050704	ZX-PGS-050704	ZX-PTS-050704	—	ZX-0507	45	60
55×91×43	ZX-AGS-050904	ZX-ATS-050904	ZX-PGS-050904	ZX-PTS-050904	—	ZX-0509	45	80
65×95×55	ZX-AGS-060905	ZX-ATS-060905	ZX-PGS-060905	ZX-PTS-060905	—	—	—	—
75×91×43	ZX-AGS-070904	ZX-ATS-070904	ZX-PGS-070904	ZX-PTS-070904	—	ZX-0709	65	80
75×125×75	ZX-AGS-071207	ZX-ATS-071207	ZX-PGS-071207	ZX-PTS-071207	—	—	—	—
75×125×100	ZX-AGS-071210	ZX-ATS-071210	ZX-PGS-071210	ZX-PTS-071210	ZX-0712P	ZX-0712	60	110
80×80×60	ZX-AGS-080806	ZX-ATS-080806	ZX-PGS-080806	ZX-PTS-080806	ZX-0808P	ZX-0808	65	65
80×80×85	ZX-AGS-080808	ZX-ATS-080808	ZX-PGS-080808	ZX-PTS-080808	ZX-0808P	ZX-0808	65	65
80×110×45	ZX-AGS-081104	ZX-ATS-081104	ZX-PGS-081104	ZX-PTS-081104	ZX-0811P	ZX-0811	67	91
80×110×60	ZX-AGS-081106	ZX-ATS-081106	ZX-PGS-081106	ZX-PTS-081106	ZX-0811P	ZX-0811	67	91
80×110×70	ZX-AGS-081107	ZX-ATS-081107	ZX-PGS-081107	ZX-PTS-081107	ZX-0811P	ZX-0811	67	91
80×110×85	ZX-AGS-081108	ZX-ATS-081108	ZX-PGS-081108	ZX-PTS-081108	ZX-0811P	ZX-0811	67	91
80×130×70	ZX-AGS-081307	ZX-ATS-081307	ZX-PGS-081307	ZX-PTS-081307	ZX-0813P	ZX-0813	67	117
80×130×85	ZX-AGS-081308	ZX-ATS-081308	ZX-PGS-081308	ZX-PTS-081308	ZX-0813P	ZX-0813	67	117
★ 80×160×55	ZX-AGS-081605	ZX-ATS-081605	ZX-PGS-081605	ZX-PTS-081605	ZX-0816P	ZX-0816	67	151
★ 80×160×90	ZX-AGS-081609	ZX-ATS-081609	ZX-PGS-081609	ZX-PTS-081609	ZX-0816P	ZX-0816	67	151
80×180×70	ZX-AGS-081807	ZX-ATS-081807	ZX-PGS-081807	ZX-PTS-081807	ZX-0818P	ZX-0818	70	170
80×180×85	ZX-AGS-081808	ZX-ATS-081808	ZX-PGS-081808	ZX-PTS-081808	ZX-0818P	ZX-0818	70	170
80×220×70	ZX-AGS-082207	ZX-ATS-082207	ZX-PGS-082207	ZX-PTS-082207	ZX-0822P	ZX-0822	67	209
80×250×70	ZX-AGS-082507	ZX-ATS-082507	ZX-PGS-082507	ZX-PTS-082507	ZX-0825P	ZX-0825	67	237
80×250×85	ZX-AGS-082508	ZX-ATS-082508	ZX-PGS-082508	ZX-PTS-082508	ZX-0825P	ZX-0825	67	237
91×110×43	ZX-AGS-091104	ZX-ATS-091104	ZX-PGS-091104	ZX-PTS-091104	—	ZX-0911	80	100
100×100×75	ZX-AGS-101007	ZX-ATS-101007	ZX-PGS-101007	ZX-PTS-101007	ZX-1010P	ZX-1010	80	80
100×100×100	ZX-AGS-101010	ZX-ATS-101010	ZX-PGS-101010	ZX-PTS-101010	ZX-1010P	ZX-1010	80	80
100×180×75	ZX-AGS-101807	ZX-ATS-101807	ZX-PGS-101807	ZX-PTS-101807	—	ZX-1018	82	162
100×223×75	ZX-AGS-102207	ZX-ATS-102207	ZX-PGS-102207	ZX-PTS-102207	—	ZX-1022	80	205
110×180×90	ZX-AGS-111809	ZX-ATS-111809	ZX-PGS-111809	ZX-PTS-111809	ZX-1118P	ZX-1118	98	108
110×180×105	ZX-AGS-111810	ZX-ATS-111810	ZX-PGS-111810	ZX-PTS-111810	ZX-1118P	ZX-1118	98	168
120×200×75	ZX-AGS-122007	ZX-ATS-122007	ZX-PGS-122007	ZX-PTS-122007	ZX-1220P	ZX-1220	95	175
120×220×85	ZX-AGS-122208	ZX-ATS-122208	ZX-PGS-122208	ZX-PTS-122208	ZX-1222P	ZX-1222	95	175
125×125×75	ZX-AGS-121207	ZX-ATS-121207	ZX-PGS-121207	ZX-PTS-121207	ZX-1212P	ZX-1212	112	112
125×125×100	ZX-AGS-121210	ZX-ATS-121210	ZX-PGS-121210	ZX-PTS-121210	ZX-1212P	ZX-1212	112	112
125×175×75	ZX-AGS-121707	ZX-ATS-121707	ZX-PGS-121707	ZX-PTS-121707	ZX-1217P	ZX-1217	112	162
125×175×100	ZX-AGS-121710	ZX-ATS-121710	ZX-PGS-121710	ZX-PTS-121710	ZX-1217P	ZX-1217	112	162
140×170×95	ZX-AGS-141709	ZX-ATS-141709	ZX-PGS-141709	ZX-PTS-141709	ZX-1417P	ZX-1417	127	154
140×230×95	ZX-AGS-142309	ZX-ATS-142309	ZX-PGS-142309	ZX-PTS-142309	ZX-1423P	ZX-1423	125	215
150×200×75	ZX-AGS-152007	ZX-ATS-152007	ZX-PGS-152007	ZX-PTS-152007	ZX-1520P	ZX-1520	136	185
150×200×100	ZX-AGS-152010	ZX-ATS-152010	ZX-PGS-152010	ZX-PTS-152010	ZX-1520P	ZX-1520	136	185
150×200×130	ZX-AGS-152013	ZX-ATS-152013	ZX-PGS-152013	ZX-PTS-152013	ZX-1520P	ZX-1520	136	185
150×200×130	ZX-AGS-152013-1	ZX-ATS-152013-1	ZX-PGS-152013-1	ZX-PTS-152013-1	ZX-1520P	ZX-1520	136	185
150×200×160	ZX-AGS-152016	ZX-ATS-152016	ZX-PGS-152016	ZX-PTS-152016	ZX-1520P	ZX-1520	136	185
150×250×100	ZX-AGS-152510	ZX-ATS-152510	ZX-PGS-152510	ZX-PTS-152510	ZX-1525P	ZX-1525	135	235
150×250×130	ZX-AGS-152513	ZX-ATS-152513	ZX-PGS-152513	ZX-PTS-152513	ZX-1525P	ZX-1525	135	235
150×250×130	ZX-AGS-152513-1	ZX-ATS-152513-1	ZX-PGS-152513-1	ZX-PTS-152513-1	ZX-1525P	ZX-1525	135	235
150×250×160	ZX-AGS-152516	ZX-ATS-152516	ZX-PGS-152516	ZX-PTS-152516	ZX-1525P	ZX-1525	135	235
175×175×75	ZX-AGS-171707	ZX-ATS-171707	ZX-PGS-171707	ZX-PTS-171707	ZX-1717P	ZX-1717	159	159
175×175×100	ZX-AGS-171710	ZX-ATS-171710	ZX-PGS-171710	ZX-PTS-171710	ZX-1717P	ZX-1717	159	159
175×250×75	ZX-AGS-172507	ZX-ATS-172507	ZX-PGS-172507	ZX-PTS-172507	ZX-1725P	ZX-1725	155	230
175×250×100	ZX-AGS-172510	ZX-ATS-172510	ZX-PGS-172510	ZX-PTS-172510	ZX-1725P	ZX-1725	155	230
180×250×100	ZX-AGS-182510	ZX-ATS-182510	ZX-PGS-182510	ZX-PTS-182510	—	ZX-1825	160	230
200×200×95	ZX-AGS-202009	ZX-ATS-202009	ZX-PGS-202009	ZX-PTS-202009	ZX-2020P	ZX-2020	185	185
200×200×125	ZX-AGS-202012	ZX-ATS-202012	ZX-PGS-202012	ZX-PTS-202012	ZX-2020P	ZX-2020	185	185
200×200×130	ZX-AGS-202013	ZX-ATS-202013	ZX-PGS-202013	ZX-PTS-202013	ZX-2020P	ZX-2020	185	185
200×200×160	ZX-AGS-202016	ZX-ATS-202016	ZX-PGS-202016	ZX-PTS-202016	ZX-2020P	ZX-2020	185	185
200×250×100	ZX-AGS-202510	ZX-ATS-202510	ZX-PGS-202510	ZX-PTS-202510	ZX-2025P	ZX-2025	180	228
200×300×105	ZX-AGS-203010	ZX-ATS-203010	ZX-PGS-203010	ZX-PTS-203010	ZX-2030P	ZX-2030	180	275

产品特征 Product characteristics





- 箱体连接螺栓采用注塑成型的方式，与箱体链接时具有足够的强度，紧固后不会破裂。
- 设计了四面滑动模式，能更有效地抗击冲击。
- 有绝好的绝缘性能，抗化学腐蚀和抗机械挤压的性能。达到高要求的IP66防护等级，所有的箱体都防尘、防水、抗80°高温。采用ABS、PC等材料制成，外型美观、性能兼顾。产品适用于小型终端机、按钮盒、信号机、继电器、计量器、通信用接线盒等设备。

- Screw thread for connecting cover bolt of the base in insertde into the base in injection molding so that it has sufficient and not broken when bolt.
- It is designed as side sliding type to be strong against impact.
- Have excellent insulation properties, chemical resistance and the performance of mechanical extrusion. Meet the high requirements of IP66 protection grade, all cabinet dustproof, waterproof, resistance to high temperature of 80 ° . Use the materials such as ABS, PC, both the appearance and performance. Products applicable to the small terminal, button box, signal relay, meter, communication terminal box, etc.



尺寸详解 (Detailed size)

Dimension (允许误差±1mm)

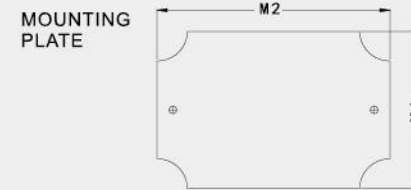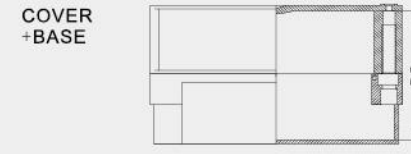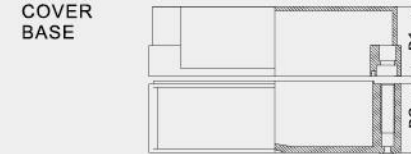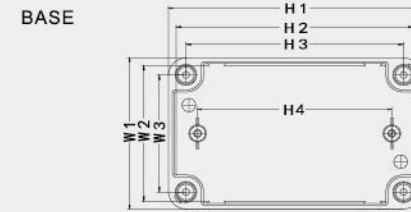

防尘防水等级	IP 66/67
冲击测试	IK 07/08
温度范围	ABS: -40~+85 PC: -40~+120
难燃性	ABS: 94-HB PC/ABS: 94-V-0-5VA PC: 94-HB.94-V-0-5VA
备注	前面带★表示螺丝是不锈钢材质

适用附件 Accessories

Size	Division	W1	W2	W3	H1	H2	H3	H4	D1	D2	D3
★ 50×65×55		50	44	37	65	59	52	40	20	35	30
55×70×43		55	47	47	70	62	52	41	8	35	43
55×91×43		55	47	47	91	89	78	61	8	35	43
65×95×55		65	59	50	95	89	79	50	15	40	40
75×91×43		75	67	67	91	89	78	61	8	35	43
75×125×75		75	66	56	125	116	107	90	25	50	60
75×125×100		75	66	46	125	116	107	90	50	50	85
80×80×60		80	77	62	80	77	62	50	15	45	45
80×80×85		80	77	62	80	77	62	50	15	70	70
80×110×45		80	72	62	110	102	92	80	20	25	28
80×110×60		80	72	62	110	102	92	80	35	25	42
80×110×70		80	72	62	110	102	92	80	20	50	52
80×110×85		80	72	62	110	102	92	80	35	50	68
80×130×70		80	72	62	130	122	112	100	20	50	52
80×130×85		80	72	62	130	122	112	100	35	50	68
★ 80×160×55		80	76	66	160	156	146	138	15	40	38
★ 80×160×90		80	76	66	160	156	146	138	15	75	72
80×180×70		80	72	62	180	172	162	150	20	50	52
80×180×85		80	72	62	180	172	162	150	35	50	68
80×220×70		80	72	62	220	212	202	190	20	50	52
80×250×70		80	72	62	250	242	232	220	20	50	52
80×250×85		80	72	62	250	242	232	220	35	50	60
91×110×43		91	89	78	110	108	102	90	8	35	43
100×100×75		100	89	82	100	89	82	60	20	55	60
100×100×100		100	89	82	100	89	82	60	20	80	85
100×180×75		100	91	76	180	151	155	142	15	60	60
100×223×75		100	91	76	223	194	198	187	15	60	60
110×180×90		110	105	95	183	175	165	145	20	70	76
110×180×105		110	105	95	183	175	165	145	35	70	91
120×200×75		120	108	103	200	190	182	160	20	55	65
120×220×85		120	110	100	220	210	200	183	20	67	74
125×125×75		125	117	105	125	117	105	70	20	55	58
125×125×100		125	117	105	125	117	105	70	20	80	82
125×175×75		125	117	105	175	167	156	140	25	50	58
125×175×100		125	117	105	175	167	156	140	50	50	82
140×170×95		140	132	122	170	162	152	130	20	75	76
140×230×95		140	132	122	230	222	212	190	20	75	76
150×200×75		150	140	132	200	192	182	160	20	55	58
150×200×100		150	140	132	200	192	182	160	20	80	82
150×200×130		150	140	132	200	192	182	160	50	80	112
150×200×160		150	140	132	200	192	182	160	50	110	142
150×250×100		150	142	132	250	242	232	210	20	80	8



型号规格 Model and size



Size W H D	产品型号 Product model (Screw type)				内板型号 Plate Model		金属内板规格 Plate Size	
	ABS 盖:灰色ABS 盒体:灰色ABS Cover:Grey ABS Body:Grey ABS	PC/ABS 盖:透明PC 盒体:灰色ABS Cover:Transparent PC Body:Grey ABS	PC 盖:灰色PC 盒体:灰色PC Cover:Grey PC Body:Grey PC	PC 盖:透明PC 盒体:灰色PC Cover:Transparent PC Body:Grey PC	Plastic(塑料)	Metal(金属)	M1	M2
280 × 190 × 130	ZX-AGS-281913	ZX-ATS-281913	ZX-PGS-281913	ZX-PTS-281913	ZX-2819P	ZX-2819	160	260
280 × 190 × 180	ZX-AGS-281918	ZX-ATS-281918	ZX-PGS-281918	ZX-PTS-281918	ZX-2819P	ZX-2819	160	260
280 × 190 × 180	ZX-AGS-281918-1	ZX-ATS-281918-1	ZX-PGS-281918-1	ZX-PTS-281918-1	ZX-2819P	ZX-2819	160	260
280 × 190 × 230	ZX-AGS-281923	ZX-ATS-281923	ZX-PGS-281923	ZX-PTS-281923	ZX-2819P	ZX-2819	160	260
280 × 280 × 130	ZX-AGS-282813	ZX-ATS-282813	ZX-PGS-282813	ZX-PTS-282813	ZX-2828P	ZX-2828	245	245
280 × 280 × 180	ZX-AGS-282818	ZX-ATS-282818	ZX-PGS-282818	ZX-PTS-282818	ZX-2828P	ZX-2828	245	245
280 × 280 × 180	ZX-AGS-282818-1	ZX-ATS-282818-1	ZX-PGS-282818-1	ZX-PTS-282818-1	ZX-2828P	ZX-2828	245	245
280 × 280 × 230	ZX-AGS-282823	ZX-ATS-282823	ZX-PGS-282823	ZX-PTS-282823	ZX-2828P	ZX-2828	245	245
340 × 280 × 130	ZX-AGS-342813	ZX-ATS-342813	ZX-PGS-342813	ZX-PTS-342813	ZX-3428P	ZX-3428	245	305
340 × 280 × 180	ZX-AGS-342818	ZX-ATS-342818	ZX-PGS-342818	ZX-PTS-342818	ZX-3428P	ZX-3428	245	305
380 × 190 × 100	ZX-AGS-381910	ZX-ATS-381910	ZX-PGS-381910	ZX-PTS-381910	ZX-3819P	ZX-3819	160	340
380 × 190 × 130	ZX-AGS-381913	ZX-ATS-381913	ZX-PGS-381913	ZX-PTS-381913	ZX-3819P	ZX-3819	160	340
380 × 190 × 180	ZX-AGS-381918	ZX-ATS-381918	ZX-PGS-381918	ZX-PTS-381918	ZX-3819P	ZX-3819	160	340
280 × 380 × 130	ZX-AGS-283813	ZX-ATS-283813	ZX-PGS-283813	ZX-PTS-283813	ZX-2838P	ZX-2838	245	345
280 × 380 × 180	ZX-AGS-283818	ZX-ATS-283818	ZX-PGS-283818	ZX-PTS-283818	ZX-2838P	ZX-2838	245	345
280 × 380 × 180	ZX-AGS-283818-1	ZX-ATS-283818-1	ZX-PGS-283818-1	ZX-PTS-283818-1	ZX-2838P	ZX-2838	245	345
280 × 380 × 230	ZX-AGS-283823	ZX-ATS-283823	ZX-PGS-283823	ZX-PTS-283823	ZX-2838P	ZX-2838	245	345
280 × 560 × 130	ZX-AGS-285613	ZX-ATS-285613	ZX-PGS-285613	ZX-PTS-285613	ZX-2856P	ZX-2856	245	525
380 × 560 × 180	ZX-AGS-385618	ZX-ATS-385618	ZX-PGS-385618	ZX-PTS-385618	ZX-3856P	ZX-3856	345	525

产品特征 Product characteristics

- 箱体连接螺栓采用注塑成型的方式，与箱体链接时具有足够的强度，紧固后不会破裂。
- 设计了四面滑动模式，能更有效地抗击冲击。
- 为了有效的保护内部电子电器元件，箱体采用加厚处理，以保证产品的永久性使用。
- 采用高强度ABS、PC耐火材料UV添加材料制成，外形美观大方，具有很高的可塑性和坚固性。适用于端子箱、配电板、仪器盒、电力设备BOX以及控制箱，作用方便。



- Screw thread for connecting cover bolt of the base in insertde into the base in injection molding so that it has sufficient and not broken when bolt.
- It is designed as side sliding type to be strong against impact.
- It can be used aemi-permanently as we reinforced thickness.
- With high strength ABS,PC refractories and UV added material,the enclosure has beautiful appearance, high plasticity and ruggedness. It is suitable for terminal boxes,distribution panels, instrument boxes,electrical equipment boxes and control boxes,simple and easy to use.



尺寸详解 (Detailed size)

Dimension (允许误差±1mm)

BASE

COVER
BASECOVER
+BASEMOUNTING
PLATE

Size	Division	W1	W2	W3	W4	H1	H2	H3	H4	D1	D2	D3
280 × 190 × 130		280	265	255	210	190	167	165	120	30	100	110
280 × 190 × 180		280	265	255	210	190	167	165	120	80	100	160
280 × 190 × 180		280	265	255	210	190	167	165	120	30	150	160
280 × 190 × 230		280	265	255	210	190	167	165	120	80	150	210
280 × 280 × 130		280	257	255	210	190	257	255	210	30	100	110
280 × 280 × 180		280	257	255	210	280	257	255	210	80	100	160
280 × 280 × 180		280	257	255	210	280	257	255	210	30	150	160
280 × 280 × 230		280	257	255	210	280	257	255	210	80	150	210
340 × 280 × 130		340	317	315	270	280	257	255	210	30	100	110
340 × 280 × 180		340	317	315	270	280	257	255	210	80	100	160
380 × 190 × 100		380	362	355	310	190	173	165	120	30	70	80
380 × 190 × 130		380	362	355	310	190	173	165	120	30	100	110
380 × 190 × 180		38	362	355	310	190	173	165	120	30	150	160
280 × 380 × 130		380	358	355	315	280	257	255	213	30	100	110
280 × 380 × 180		380	358	355	315	280	257	255	213	80	100	160
280 × 380 × 180		380	358	355	315	280	257	255	213	30	150	160
280 × 380 × 230		380	358	355	315	280	257	255	213	80	150	210
280 × 560 × 130		560	545	534	490	280	263	255	213	30	100	110
380 × 560 × 180		560	547	534	490	380	362	356	310	30	150	165




防尘防水等级 IP 66/67


冲击测试 IK 07/08

温度范围 ABS: -40~+85 PC: -40~+120

难燃性 ABS: 94-HB PC/ABS: 94-V-0-5VA PC: 94-HB.94-V-O-5VA

适用附件 Accessories

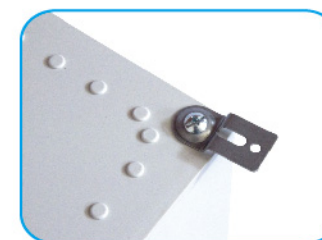Plastic mounting plate
塑料底板 (ABS)Steel mounting plate
金属底板 (镀锌)Wall brackets Plastic box
塑料盒不锈钢挂墙钩Door hinge fixing piece
里门较链固定件Fixing bolts
里门固定架Plastic enclosure screw
塑料螺丝

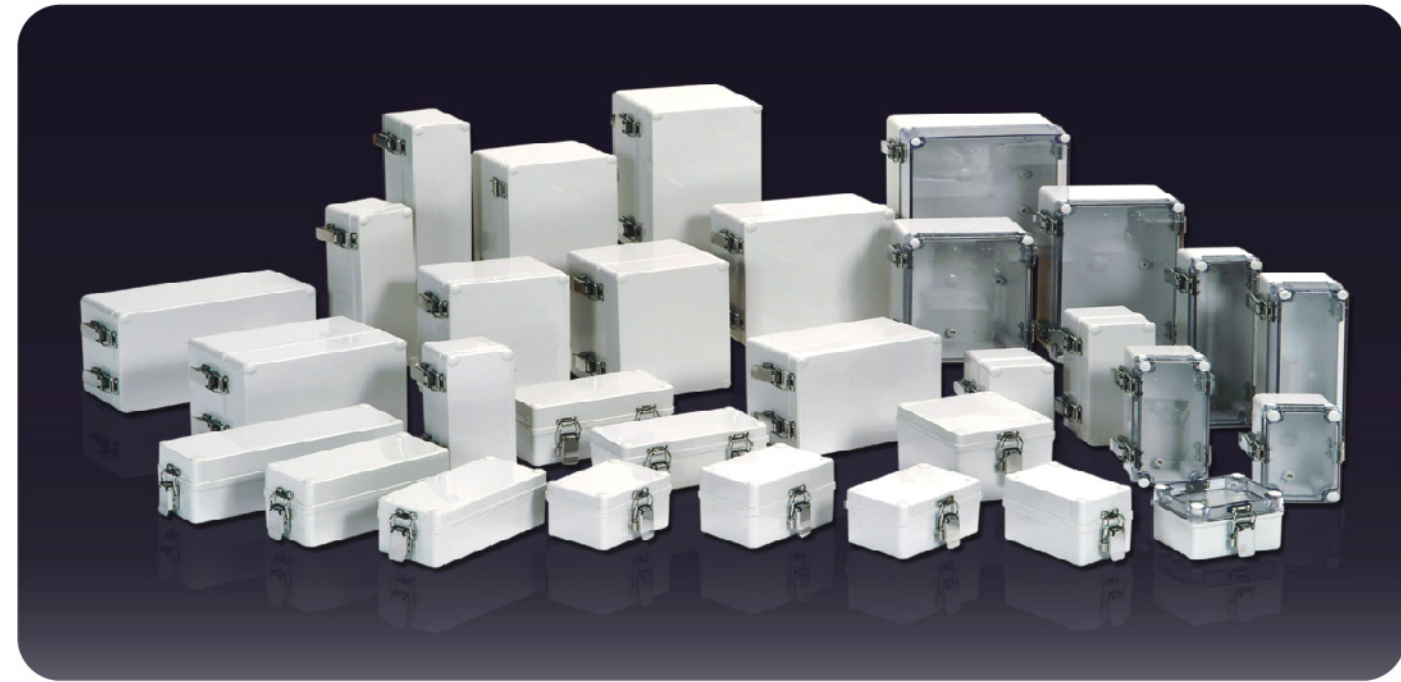

型号规格 Model and size



Size	产品型号 Product model (Screw type)				内板型号 Plate Model		金属内板规格 Plate Size	
	ABS	PC/ABS	PC	PC	Plastic(塑料)	Metal(金属)	M1	M2
W H D	盖:灰色ABS 盒体:灰色ABS Cover:Grey ABS Body:Grey ABS	盖:透明PC 盒体:灰色ABS Cover:Transparent PC Body:Grey ABS	盖:灰色PC 盒体:灰色PC Cover:Grey PC Body:Grey PC	盖:透明PC 盒体:灰色PC Cover:Transparent PC Body:Grey PC				
75 × 125 × 75	ZX-AGH-071207	ZX-ATH-071207	ZX-PGH-071207	ZX-PTH-071207	ZX-0712P	ZX-0712	60	110
75 × 125 × 100	ZX-AGH-071210	ZX-ATH-071210	ZX-PGH-071210	ZX-PTH-071210	ZX-0712P	ZX-0712	60	110
80 × 80 × 60	ZX-AGH-080806	ZX-ATH-080806	ZX-PGH-080806	ZX-PTH-080806	ZX-0808P	ZX-0808	65	65
80 × 80 × 85	ZX-AGH-080808	ZX-ATH-080808	ZX-PGH-080808	ZX-PTH-080808	ZX-0808P	ZX-0808	65	65
80 × 110 × 45	ZX-AGH-081104	ZX-ATH-081104	ZX-PGH-081104	ZX-PTH-081104	ZX-0811P	ZX-0811	67	91
80 × 110 × 60	ZX-AGH-081106	ZX-ATH-081106	ZX-PGH-081106	ZX-PTH-081106	ZX-0811P	ZX-0811	67	91
80 × 110 × 70	ZX-AGH-081107	ZX-ATH-081107	ZX-PGH-081107	ZX-PTH-081107	ZX-0811P	ZX-0811	67	91
80 × 110 × 85	ZX-AGH-081108	ZX-ATH-081108	ZX-PGH-081108	ZX-PTH-081108	ZX-0811P	ZX-0811	67	91
80 × 130 × 70	ZX-AGH-081307	ZX-ATH-081307	ZX-PGH-081307	ZX-PTH-081307	ZX-0813P	ZX-0813	67	117
80 × 130 × 85	ZX-AGH-081308	ZX-ATH-081308	ZX-PGH-081308	ZX-PTH-081308	ZX-0813P	ZX-0813	67	117
80 × 160 × 55	ZX-AGH-081605	ZX-ATH-081605	ZX-PGH-081605	ZX-PTH-081605	ZX-0816P	ZX-0816	67	151
80 × 160 × 90	ZX-AGH-081609	ZX-ATH-081609	ZX-PGH-081609	ZX-PTH-081609	ZX-0816P	ZX-0816	67	151
80 × 180 × 70	ZX-AGH-081807	ZX-ATH-081807	ZX-PGH-081807	ZX-PTH-081807	ZX-0818P	ZX-0818	70	170
80 × 180 × 85	ZX-AGH-081808	ZX-ATH-081808	ZX-PGH-081808	ZX-PTH-081808	ZX-0818P	ZX-0818	70	170
80 × 220 × 70	ZX-AGH-082207	ZX-ATH-082207	ZX-PGH-082207	ZX-PTH-082207	ZX-0822P	ZX-0822	67	209
80 × 250 × 70	ZX-AGH-082507	ZX-ATH-082507	ZX-PGH-082507	ZX-PTH-082507	ZX-0825P	ZX-0825	67	237
80 × 250 × 85	ZX-AGH-082508	ZX-ATH-082508	ZX-PGH-082508	ZX-PTH-082508	ZX-0825P	ZX-0825	67	237
100 × 100 × 75	ZX-AGH-101007	ZX-ATH-101007	ZX-PGH-101007	ZX-PTH-101007	ZX-1010P	ZX-1010	80	80
100 × 100 × 100	ZX-AGH-101010	ZX-ATH-101010	ZX-PGH-101010	ZX-PTH-101010	ZX-1010P	ZX-1010	80	80
110 × 180 × 90	ZX-AGH-111809	ZX-ATH-111809	ZX-PGH-111809	ZX-PTH-111809	ZX-1118P	ZX-1118	95	175
110 × 180 × 105	ZX-AGH-111810	ZX-ATH-111810	ZX-PGH-111810	ZX-PTH-111810	ZX-1118P	ZX-1118	95	175
120 × 200 × 75	ZX-AGH-122007	ZX-ATH-122007	ZX-PGH-122007	ZX-PTH-122007	ZX-1220P	ZX-1220	98	108
120 × 220 × 85	ZX-AGH-122208	ZX-ATH-122208	ZX-PGH-122208	ZX-PTH-122208	ZX-1222P	ZX-1222	98	168
125 × 125 × 75	ZX-AGH-121207	ZX-ATH-121207	ZX-PGH-121207	ZX-PTH-121207	ZX-1212P	ZX-1212	112	112
125 × 125 × 100	ZX-AGH-121210	ZX-ATH-121210	ZX-PGH-121210	ZX-PTH-121210	ZX-1212P	ZX-1212	112	112
125 × 175 × 75	ZX-AGH-121707	ZX-ATH-121707	ZX-PGH-121707	ZX-PTH-121707	ZX-1217P	ZX-1217	112	162
125 × 175 × 100	ZX-AGH-121710	ZX-ATH-121710	ZX-PGH-121710	ZX-PTH-121710	ZX-1217P	ZX-1217	112	162
140 × 170 × 95	ZX-AGH-141709	ZX-ATH-141709	ZX-PGH-141709	ZX-PTH-141709	ZX-1417P	ZX-1417	127	154
140 × 230 × 95	ZX-AGH-142309	ZX-ATH-142309	ZX-PGH-142309	ZX-PTH-142309	ZX-1423P	ZX-1423	125	215
150 × 200 × 75	ZX-AGH-152007	ZX-ATH-152007	ZX-PGH-152007	ZX-PTH-152007	ZX-1520P	ZX-1520	136	185
150 × 200 × 100	ZX-AGH-152010	ZX-ATH-152010	ZX-PGH-152010	ZX-PTH-152010	ZX-1520P	ZX-1520	136	185
150 × 200 × 130	ZX-AGH-152013	ZX-ATH-152013	ZX-PGH-152013	ZX-PTH-152013	ZX-1520P	ZX-1520	136	185
150 × 200 × 130	ZX-AGH-152013-1	ZX-ATH-152013-1	ZX-PGH-152013-1	ZX-PTH-152013-1	ZX-1520P	ZX-1520	136	185
150 × 200 × 160	ZX-AGH-152016	ZX-ATH-152016	ZX-PGH-152016	ZX-PTH-152016	ZX-1520P	ZX-1520	136	185
150 × 250 × 100	ZX-AGH-152510	ZX-ATH-152510	ZX-PGH-152510	ZX-PTH-152510	ZX-1525P	ZX-1525	135	235
150 × 250 × 130	ZX-AGH-152513	ZX-ATH-152513	ZX-PGH-152513	ZX-PTH-152513	ZX-1525P	ZX-1525	135	235
150 × 250 × 130	ZX-AGH-152513-1	ZX-ATH-152513-1	ZX-PGH-152513-1	ZX-PTH-152513-1	ZX-1525P	ZX-1525	135	235
150 × 250 × 160	ZX-AGH-152516	ZX-ATH-152516	ZX-PGH-152516	ZX-PTH-152516	ZX-1525P	ZX-1525	135	235
175 × 175 × 75	ZX-AGH-171707	ZX-ATH-171707	ZX-PGH-171707	ZX-PTH-171707	ZX-1717P	ZX-1717	159	159
175 × 175 × 100	ZX-AGH-171710	ZX-ATH-171710	ZX-PGH-171710	ZX-PTH-171710	ZX-1717P	ZX-1717	159	159
175 × 250 × 75	ZX-AGH-172507	ZX-ATH-172507	ZX-PGH-172507	ZX-PTH-172507	ZX-1725P	ZX-1725	155	230
175 × 250 × 100	ZX-AGH-172510	ZX-ATH-172510	ZX-PGH-172510	ZX-PTH-172510	ZX-1725P	ZX-1725	155	230
180 × 250 × 100	ZX-AGH-182510	ZX-ATH-182510	ZX-PGH-182510	ZX-PTH-182510	—	ZX-1825	160	230
200 × 200 × 95	ZX-AGH-202009	ZX-ATH-202009	ZX-PGH-202009	ZX-PTH-202009	ZX-2020P	ZX-2020	185	185
200 × 200 × 125	ZX-AGH-202012	ZX-ATH-202012	ZX-PGH-202012	ZX-PTH-202012	ZX-2020P	ZX-2020	185	185
200 × 200 × 130	ZX-AGH-202013	ZX-ATH-202013	ZX-PGH-202013	ZX-PTH-202013	ZX-2020P	ZX-2020	185	185
200 × 200 × 160	ZX-AGH-202016	ZX-ATH-202016	ZX-PGH-202016	ZX-PTH-202016	ZX-2020P	ZX-2020	185	185
200 × 250 × 100	ZX-AGH-202510	ZX-ATH-202510	ZX-PGH-202510	ZX-PTH-202510	ZX-2025P	ZX-2025	180	228
200 × 300 × 105	ZX-AGH-203010	ZX-ATH-203010	ZX-PGH-203010	ZX-PTH-203010	ZX-2030P	ZX-2030	180	275


产品特征 Product characteristics

1. 采用了不锈钢铰链和锁扣，即使在复杂的环境下也不易受到破损。
 2. 产品设计中考虑到了螺栓禁锢类型的特点以及采用不锈钢铰链和锁扣的安装方式，完善设计保证了良好的密封效果。
 3. 产品标记了开孔位置，用户可以方便的进行组装。
 4. 有绝好的绝缘性能，抗化学腐蚀和抗机械挤压的性能。达到高要求的IP66防护等级，所有的箱体都防尘、防水、抗80° 高温。采用ABS、PC等材料制成，外型美观、性能兼顾。产品适用于小型终端机、按钮盒、信号机、继电器、计量器、通信用接线盒等设备。
1. It will not be damaged even using for a long time because stainless steel hinge and draw are equipped.
 2. It has excellent airtightness as it was designed considering bolt open/close type, hinge made of stainless steel and equipment of draw latch.
 3. User make hole on the place of equipment simply.
 4. Have excellent insulation properties, chemical resistance and the performance of mechanical extrusion. Meet the high requirements of IP66 protection grade, all cabinet dustproof, waterproof, resistance to high temperature of 80 ° . Use the materials such as ABS, PC, both the appearance and performance. Products applicable to the small terminal, button box, signal relay, meter, communication terminal box, etc.



尺寸详解 (Detailed size)

Dimension (允许误差±1mm)

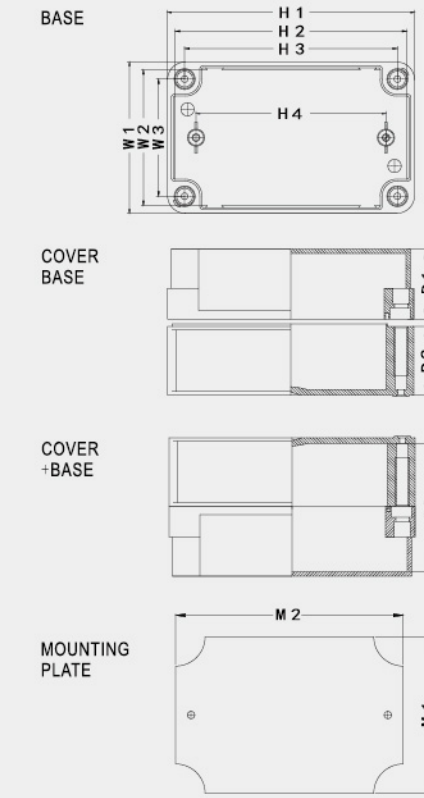

防尘防水等级	IP 66/67
冲击测试	IK 07/08
温度范围	ABS: -40~+85 PC: -40~+120
难燃性	ABS: 94-HB PC/ABS: 94-V-0-5VA PC: 94-HB, 94-V-0-5VA

适用附件 Accessories

Size	Division	W1	W2	W3	H1	H2	H3	H4	D1	D2	D3
★	50 × 65 × 55	50	44	37	65	59	52	40	20	35	30
	65 × 95 × 55	65	59	50	95	89	79	50	15	40	40
	75 × 125 × 75	75	66	56	125	116	107	90	25	50	60
	75 × 125 × 100	75	66	46	125	116	107	90	50	50	85
	80 × 80 × 60	80	77	62	80	77	62	50	15	45	45
	80 × 80 × 85	80	77	62	80	77	62	50	15	70	70
	80 × 110 × 45	80	72	62	110	102	92	80	20	25	28
	80 × 110 × 60	80	72	62	110	102	92	80	35	25	42
	80 × 110 × 70	80	72	62	110	102	92	80	20	50	52
	80 × 110 × 85	80	72	62	110	102	92	80	35	50	68
	80 × 130 × 70	80	72	62	130	122	112	100	20	50	52
	80 × 130 × 85	80	72	62	130	122	112	100	35	50	68
	80 × 160 × 55	80	76	66	160	156	146	138	15	40	38
	80 × 160 × 90	80	76	66	160	156	146	138	15	75	72
	80 × 180 × 70	80	72	62	180	172	162	150	20	50	52
	80 × 180 × 85	80	72	62	180	172	162	150	35	50	68
80 × 220 × 70	80	72	62	220	212	202	190	20	50	52	
80 × 250 × 70	80	72	62	250	242	232	220	20	50	52	
80 × 250 × 85	80	72	62	250	242	232	220	35	50	60	
100 × 100 × 75	100	89	82	100	89	82	60	20	55	60	
100 × 100 × 100	100	89	82	100	89	82	60	20	80	85	
110 × 180 × 90	110	105	95	183	175	165	145	20	70	76	
110 × 180 × 105	110	105	95	183	175	165	145	35	70	91	
120 × 200 × 75	120	108	103	200	190	182	160	20	55	65	
120 × 220 × 85	120	110	100	220	210	200	183	20	67	74	
125 × 125 × 75	125	117	105	125	117	105	70	20	55	58	
125 × 125 × 100	125	117	105	125	117	105	70	20	80	82	
125 × 175 × 75	125	117	105	175	167	156	140	25	50	58	
125 × 175 × 100	125	117	105	175	167	156	140	50	50	82	
140 × 170 × 95	140	132	122	170	162	152	130	20	75	76	
140 × 230 × 95	140	132	122	230	222	212	190	20	75	76	
150 × 200 × 75	150	140	132	200	192	182	160	20	55	58	
150 × 200 × 100	150	140	132	200	192	182	160	20	80	82	
150 × 200 × 130	150	140	132	200	192	182	160	50	80	112	
150 × 200 × 130	150	140	132	200	192	182	160	20	110	112	
150 × 200 × 160	150	140	132	200	242	182	160	50	110	142	
150 × 250 × 100	150	142	132	250	242	232	210	20	80	82	
150 × 250 × 130	150	142	132	250	242	232	210	50	80	112	
150 × 250 × 130	150	142	132	250	242	232	210	20	110	112	
150 × 250 × 160	150	142	132	250	197	232	210	50	110	142	
175 × 175 × 75	175	167	156	175	167	156	140	25	50	60	
175 × 175 × 100	175	167	156	175	242	156	140	50	50	85	
175 × 250 × 75	175	166	156	250	242	232	214	25	50	60	
175 × 250 × 100	175	166	156	250	239	232	214	50	50	85	
★	180 × 250 × 100	180	170	155	250	192	225	216	15	85	86
	200 × 200 × 95	200	192	182	200	192	182	120	20	75	77
	200 × 200 × 125	200	192	182	200	192	182	120	50	75	107
	200 × 200 × 130	200	192	182	200	192	182	120	20	110	124
	200 × 200 × 160	200	192	182	200	192	182	120	50	110	142
	200 × 250 × 100	200	190	178	250	240	228	215	25	75	82
	200 × 300 × 105	200	190	180	300	290	280	263	20	85	92



型号规格 Model and size



Size W H D	产品型号 Product model (Screw type)				内板型号 Plate Model		金属内板规格 Plate Size	
	ABS 盖:灰色ABS 盒体:灰色ABS Cover:Grey ABS Body:Grey ABS	PC/ABS 盖:透明PC 盒体:灰色ABS Cover:Transparent PC Body:Grey ABS	PC 盖:灰色PC 盒体:灰色PC Cover:Grey PC Body:Grey PC	PC 盖:透明PC 盒体:灰色PC Cover:Transparent PC Body:Grey PC	Plastic(塑料)	Metal(金属)	M1	M2
280 × 190 × 130	ZX-AGH-281913	ZX-ATH-281913	ZX-PGH-281913	ZX-PTH-281913	ZX-2819P	ZX-2819	160	260
280 × 190 × 180	ZX-AGH-281918	ZX-ATH-281918	ZX-PGH-281918	ZX-PTH-281918	ZX-2819P	ZX-2819	160	260
280 × 190 × 180	ZX-AGH-281918-1	ZX-ATH-281918-1	ZX-PGH-281918-1	ZX-PTH-281918-1	ZX-2819P	ZX-2819	160	260
280 × 190 × 230	ZX-AGH-281923	ZX-ATH-281923	ZX-PGH-281923	ZX-PTH-281923	ZX-2819P	ZX-2819	160	260
280 × 280 × 130	ZX-AGH-282813	ZX-ATH-282813	ZX-PGH-282813	ZX-PTH-282813	ZX-2828P	ZX-2828	245	245
280 × 280 × 180	ZX-AGH-282818	ZX-ATH-282818	ZX-PGH-282818	ZX-PTH-282818	ZX-2828P	ZX-2828	245	245
280 × 280 × 180	ZX-AGH-282818-1	ZX-ATH-282818-1	ZX-PGH-282818-1	ZX-PTH-282818-1	ZX-2828P	ZX-2828	245	245
280 × 280 × 230	ZX-AGH-282823	ZX-ATH-282823	ZX-PGH-282823	ZX-PTH-282823	ZX-2828P	ZX-2828	245	245
340 × 280 × 130	ZX-AGH-342813	ZX-ATH-342813	ZX-PGH-342813	ZX-PTH-342813	ZX-3428P	ZX-3428	245	305
340 × 280 × 180	ZX-AGH-342818	ZX-ATH-342818	ZX-PGH-342818	ZX-PTH-342818	ZX-3428P	ZX-3428	245	305
380 × 190 × 100	ZX-AGH-381910	ZX-ATH-381910	ZX-PGH-381910	ZX-PTH-381910	ZX-3819P	ZX-3819	160	340
380 × 190 × 130	ZX-AGH-381913	ZX-ATH-381913	ZX-PGH-381913	ZX-PTH-381913	ZX-3819P	ZX-3819	160	340
380 × 190 × 180	ZX-AGH-381918	ZX-ATH-381918	ZX-PGH-381918	ZX-PTH-381918	ZX-3819P	ZX-3819	160	340
280 × 380 × 130	ZX-AGH-283813	ZX-ATH-283813	ZX-PGH-283813	ZX-PTH-283813	ZX-2838P	ZX-2838	245	345
280 × 380 × 180	ZX-AGH-283818	ZX-ATH-283818	ZX-PGH-283818	ZX-PTH-283818	ZX-2838P	ZX-2838	245	345
280 × 380 × 180	ZX-AGH-283818-1	ZX-ATH-283818-1	ZX-PGH-283818-1	ZX-PTH-283818-1	ZX-2838P	ZX-2838	245	345
280 × 380 × 230	ZX-AGH-283823	ZX-ATH-283823	ZX-PGH-283823	ZX-PTH-283823	ZX-2838P	ZX-2838	245	345
280 × 560 × 130	ZX-AGH-285613	ZX-ATH-285613	ZX-PGH-285613	ZX-PTH-285613	ZX-2856P	ZX-2856	245	525
380 × 560 × 180	ZX-AGH-385618	ZX-ATH-385618	ZX-PGH-385618	ZX-PTH-385618	ZX-3856P	ZX-3856	345	525

产品特征 Product characteristics




1. 采用了不锈钢铰链和锁扣，即使在复杂的环境下也不易受到破坏。
 2. 产品设计中考虑到了螺栓禁锢类型的特点以及采用不锈钢铰链和锁扣的安装方式，完善设计保证了良好的密封效果。
 3. 产品标记了开孔位置，用户可以方便的进行组装。
 4. 有绝好的绝缘性能，抗化学腐蚀和抗机械挤压的性能。达到高要求的IP66防护等级，所有的箱体都防尘、防水、抗80° 高温。采用ABS、PC等材料制成，外型美观、性能兼顾。产品适用于小型终端机、按钮盒、信号机、继电器、计量器、通信用接线盒等设备。
1. It will not be damaged even using for a long time because stainless steel hinge and draw are equipped.
2. It has excellent airtightness as it was designed considering bolt open/close type, hinge made of stainless steel and equipment of draw latch.
3. User make hole on the place of equipment simply.
4. Have excellent insulation properties, chemical resistance and the performance of mechanical extrusion. Meet the high requirements of IP66 protection grade, all cabinet dustproof, waterproof, resistance to high temperature of 80° . Use the materials such as ABS, PC, both the appearance and performance. Products applicable to the small terminal, button box, signal relay, meter, communication terminal box, etc.



尺寸详解 (Detailed size)

Dimension (允许误差±1mm)

BASE

COVER
BASECOVER
+BASEMOUNTING
PLATE

Size	Division	W1	W2	W3	W4	H1	H2	H3	H4	D1	D2	D3
280 × 190 × 130		280	265	255	210	190	167	165	120	30	100	110
280 × 190 × 180		280	265	255	210	190	167	165	120	80	100	160
280 × 190 × 180		280	265	255	210	190	167	165	120	30	150	160
280 × 190 × 230		280	265	255	210	190	167	165	120	80	150	210
280 × 280 × 130		280	257	255	210	190	257	255	210	30	100	110
280 × 280 × 180		280	257	255	210	280	257	255	210	80	100	160
280 × 280 × 180		280	257	255	210	280	257	255	210	30	150	160
280 × 280 × 230		280	257	255	210	280	257	255	210	80	150	210
340 × 280 × 130		340	317	315	270	280	257	255	210	30	100	110
340 × 280 × 180		340	317	315	270	280	257	255	210	80	100	160
380 × 190 × 100		380	362	355	310	190	173	165	120	30	70	80
380 × 190 × 130		380	362	355	310	190	173	165	120	30	100	110
380 × 190 × 180		38	362	355	310	190	173	165	120	30	150	160
280 × 380 × 130		380	358	355	315	280	257	255	213	30	100	110
280 × 380 × 180		380	358	355	315	280	257	255	213	80	100	160
280 × 380 × 180		380	358	355	315	280	257	255	213	30	150	160
280 × 380 × 230		380	358	355	315	280	257	255	213	80	150	210
280 × 560 × 130		560	545	534	490	280	263	255	213	30	100	110
380 × 560 × 180		560	547	534	490	380	362	356	310	30	150	165





防尘防水等级 IP 66/67

冲击测试 IK 07/08

温度范围 ABS: -40~+85 PC: -40~+120

难燃性 ABS: 94-HB PC/ABS: 94-V-0-5VA PC: 94-HB.94-V-0-5VA

适用附件 Accessories

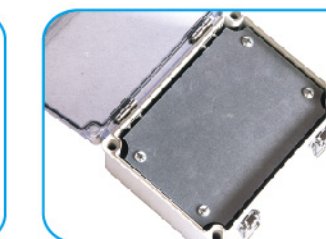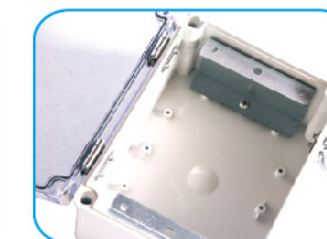Plastic mounting plate
塑料底板 (ABS)Steel mounting plate
金属底板 (镀锌)Wall brackets Plastic box
塑料盒不锈钢挂墙钩Cap for Screw
堵塞头Stainless steel latch
不锈钢搭扣Stainless steel hinge
不锈钢铰链


型号规格 Model and size

C系列（塑料扣+铰链）


Size	产品型号 Product model (Screw type)				内板型号 Plate Model		金属内板规格 Plate Size	
W H D	ABS	PC/ABS	PC	PC	Plastic(塑料)	Metal(金属)	M1	M2
200 × 300 × 180	ZX-AGC-203018 盖:灰色ABS 盒体:灰色ABS Cover:Grey ABS Body:Grey ABS	ZX-ATC-203018 盖:透明PC 盒体:灰色ABS Cover:Transparent PC Body:Grey ABS	ZX-PGC-203018 盖:灰色PC 盒体:灰色PC Cover:Grey PC Body:Grey PC	ZX-PTC-203018 盖:透明PC 盒体:灰色PC Cover:Transparent PC Body:Grey PC	ZX-2030P	ZX-2030	175	275
300 × 300 × 180	ZX-AGC-303018	ZX-ATC-303018	ZX-PGC-303018	ZX-PTC-303018	ZX-3030P	ZX-3030	275	275
300 × 400 × 180	ZX-AGC-304018	ZX-ATC-304018	ZX-PGC-304018	ZX-PTC-304018	ZX-3040P	ZX-3040	275	375
400 × 500 × 200	ZX-AGC-405020	ZX-ATC-405020	ZX-PGC-405020	ZX-PTC-405020	ZX-4050P	ZX-4050	360	460
400 × 600 × 220	ZX-AGC-406022	ZX-ATC-406022	ZX-PGC-406022	ZX-PTC-406022	ZX-3040P × 2	ZX-4060	355	550

K系列（塑料锁+铰链）

Size	产品型号 Product model (Screw type)				内板型号 Plate Model		金属内板规格 Plate Size	
W H D	ABS	PC/ABS	PC	PC	Plastic(塑料)	Metal(金属)	M1	M2
200 × 300 × 180	ZX-AGK-203018 盖:灰色ABS 盒体:灰色ABS Cover:Grey ABS Body:Grey ABS	ZX-ATK-203018 盖:透明PC 盒体:灰色ABS Cover:Transparent PC Body:Grey ABS	ZX-PGK-203018 盖:灰色PC 盒体:灰色PC Cover:Grey PC Body:Grey PC	ZX-PTK-203018 盖:透明PC 盒体:灰色PC Cover:Transparent PC Body:Grey PC	ZX-2030P	ZX-2030	175	275
300 × 300 × 180	ZX-AGK-303018	ZX-ATK-303018	ZX-PGK-303018	ZX-PTK-303018	ZX-3030P	ZX-3030	275	275
300 × 400 × 180	ZX-AGK-304018	ZX-ATK-304018	ZX-PGK-304018	ZX-PTK-304018	ZX-3040P	ZX-3040	275	375
400 × 500 × 200	ZX-AGK-405020	ZX-ATK-405020	ZX-PGK-405020	ZX-PTK-405020	ZX-4050P	ZX-4050	360	460
400 × 600 × 220	ZX-AGK-406022	ZX-ATK-406022	ZX-PGK-406022	ZX-PTK-406022	ZX-3040P × 2	ZX-4060	355	550

产品特征 Product characteristics


1. 采用抗冲击的聚碳酸酯或ABS材质制造CAB PC/ABS壁挂式电气密封箱适用于苛刻、恶劣的工业环境。箱体底座部都是设计有自攻钉孔，这样组装和安装都十分方便。
2. 分为基本铰链搭扣型和暗锁型：（1）.铰链搭扣型的都可以任意在长边或短边安装铰链搭扣。（2）.暗锁型是有一个或者多个KEY组成。
3. 您还可以选择前板或其他各种安装附件。这款系列产品太阳能领域也有应用，可作为汇流箱使用。

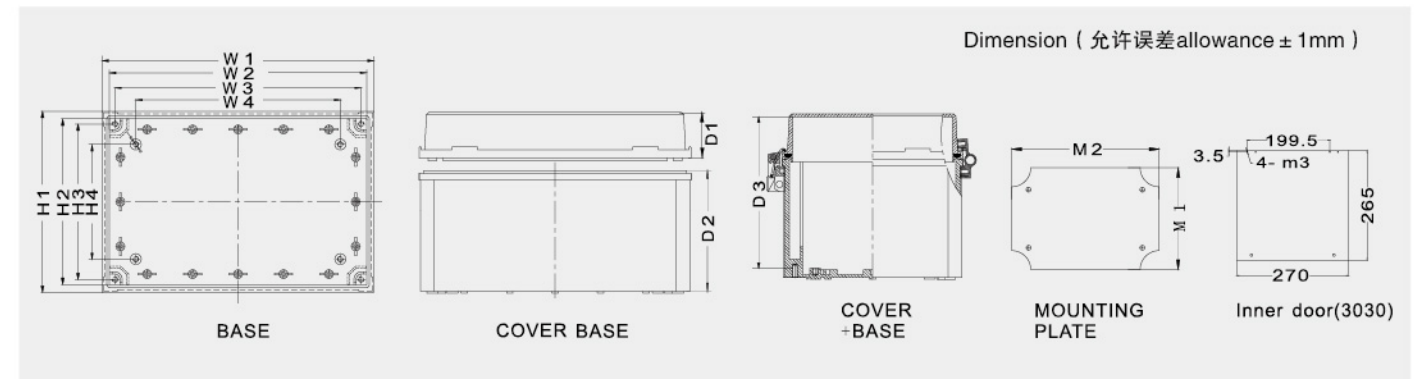
尺寸详解 (Detailed size)


Size	Division	W1	W2	W3	W4	H1	H2	H3	H4	D1	D2	D3
200 × 300 × 180		300	281	270	227	200	181	170	127	50	130	165
300 × 300 × 180		300	281	270	227	300	281	270	227	50	130	165
300 × 400 × 180		400	381	370	327	300	281	270	227	50	130	165
400 × 500 × 200		500	482	470	428	400	382	370	328	50	150	165
400 × 600 × 220		600	582	570	525	400	382	370	328	50	170	205

适用附件 Accessories


Terminal block box

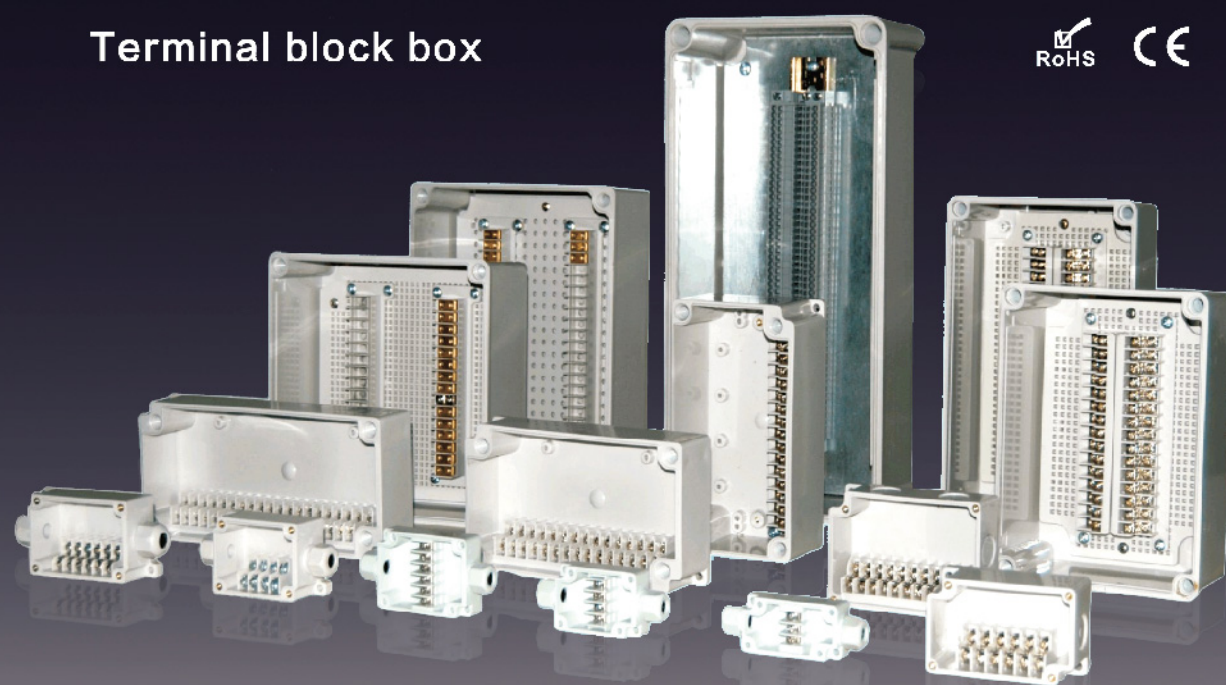

产品特征 Product characteristics

端子盒有极好的绝缘性能，抗化学腐蚀和抗机械挤压的性能。达到高要求的IP66防护等级。所有箱体都防尘、防水、能抗80度高温。产品采用高强度ABS、PC、PBT耐火材料和UV添加材料制成。外型美观大方，具有很高的可塑性和坚固性。接线端子排正常耐压400V,耐高压4KV，正常电流容量0.75mm sq.-1.5mm sq.端子规格有3P-60P多种规格满足您的选择。









The terminal block box, it is made by ABS material, Normal voltage: 400v. The normal current capacity: 0.75mm sq.-1.5mm sq.

Temperature range: -40°C to $+120^{\circ}\text{C}$


ABS: Acrylonitrile Butadiene Styrene.

PC: Poly Carbamate

Product with hole can be used with separate processing.

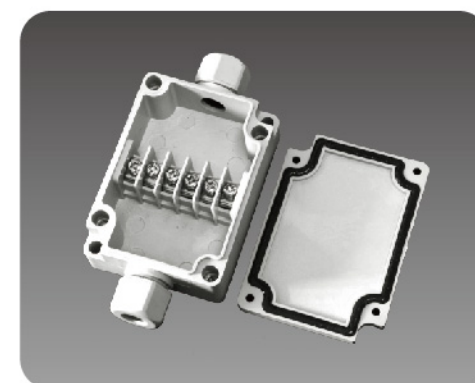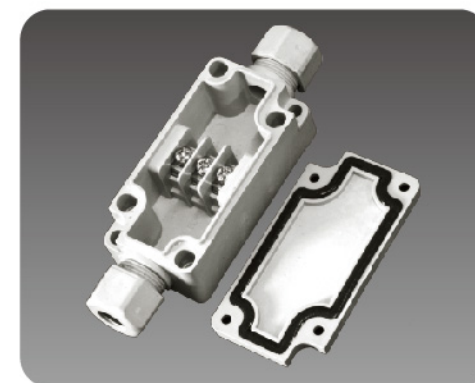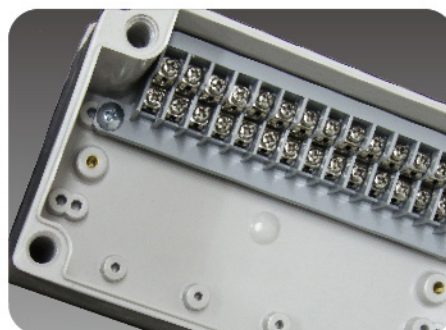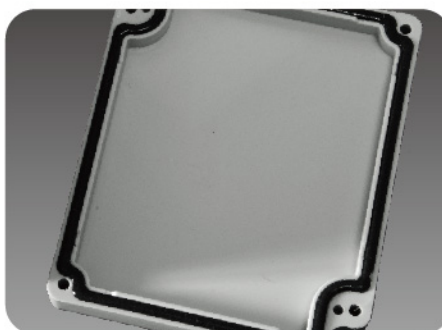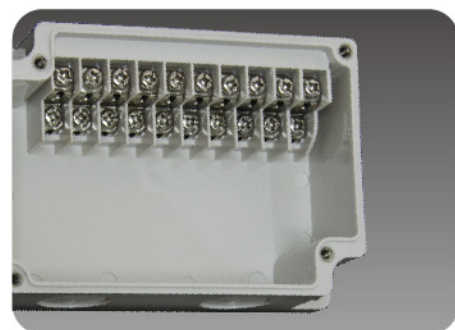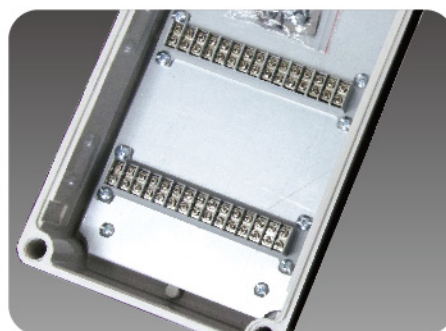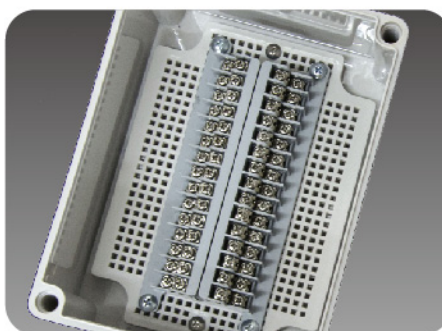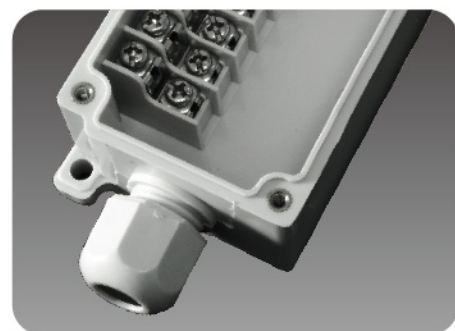


型号 (Model) : ZX-PBT-3P 尺寸 (Size) : 33×65×24mm

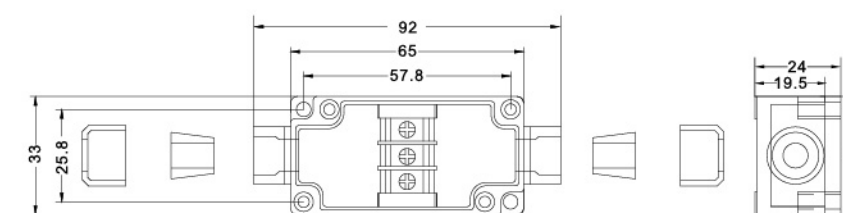


Dimension (允许误差allowance $\pm 1\text{mm}$)

型号 (Model) : ZX-PBT-4P 尺寸 (Size) : 40×60×24mm

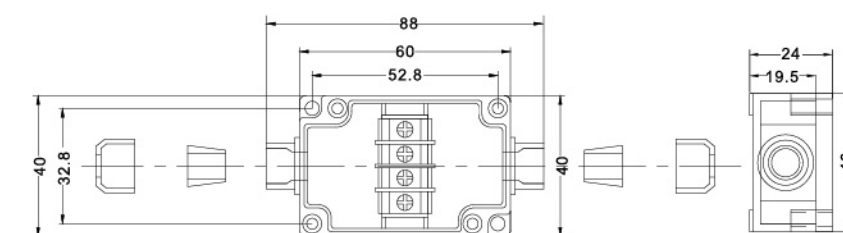
Dimension (允许误差allowance $\pm 1\text{mm}$)

型号 (Model) : ZX-PBT-6P 尺寸 (Size) : 50×70×24mm

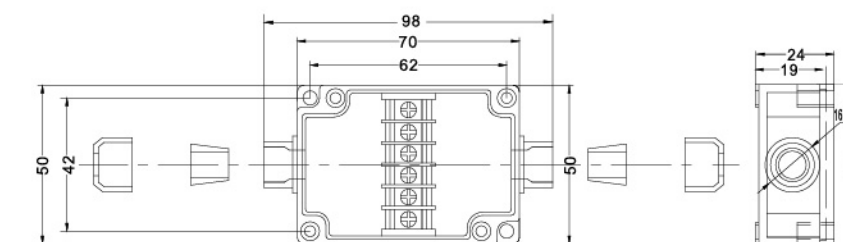

Dimension (允许误差allowance $\pm 1\text{mm}$)


型号 (Model) : ZX-AG-4P 尺寸 (Size) : 50 × 102 × 40mm

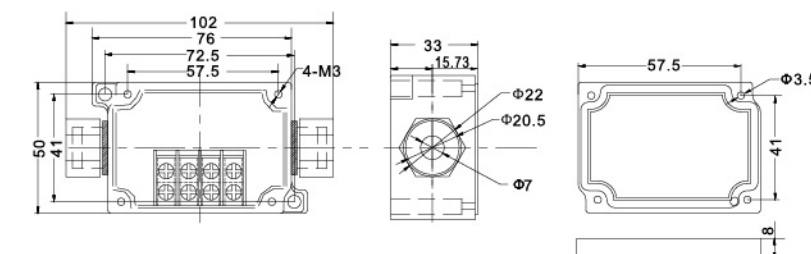

Dimension (允许误差allowance $\pm 1\text{mm}$)




型号 (Model) : ZX-AG-4P-K 尺寸 (Size) : 55×70×43mm

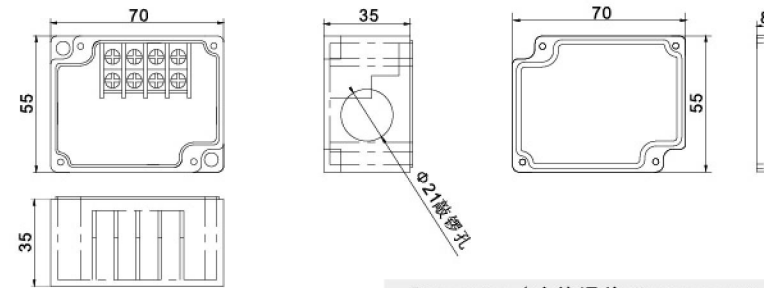

Dimension (允许误差allowance ± 1mm)




型号 (Model) : ZX-AG-6P-M 尺寸 (Size) : 75×91×43mm

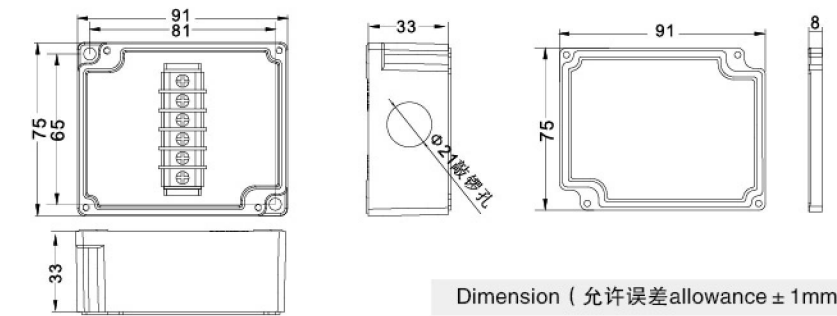


Dimension (允许误差allowance ± 1mm)




型号 (Model) : ZX-AG-4P-M 尺寸 (Size) : 55×91×43mm

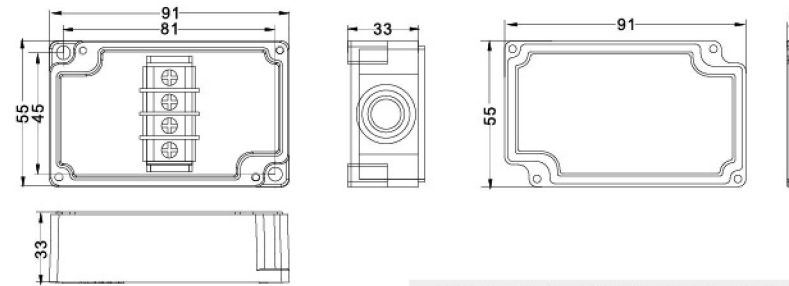

Dimension (允许误差allowance ± 1mm)

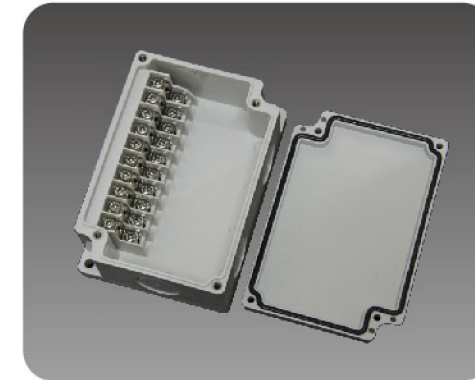


型号 (Model) : ZX-AG-10P 尺寸 (Size) : 75×110×40mm

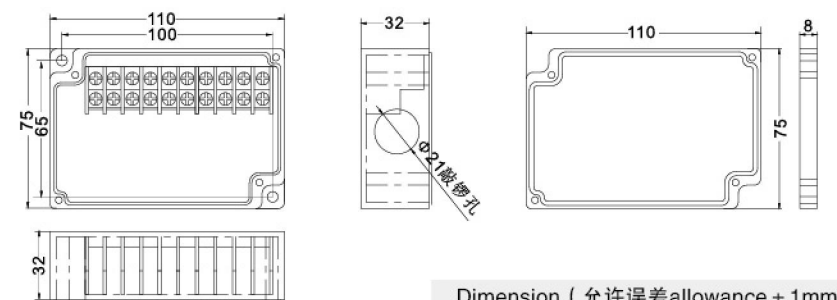


Dimension (允许误差allowance ± 1mm)




型号 (Model) : ZX-AG-6P 尺寸 (Size) : 55×125×40mm

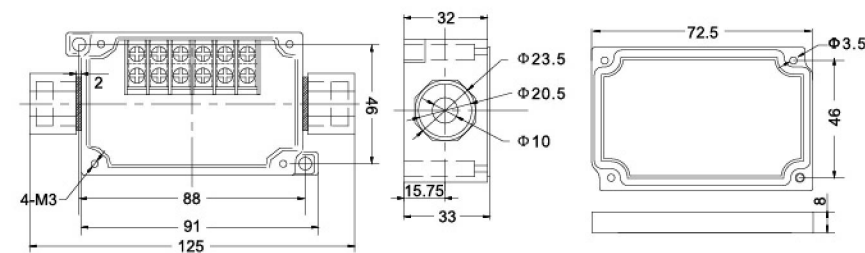

Dimension (允许误差allowance ± 1mm)

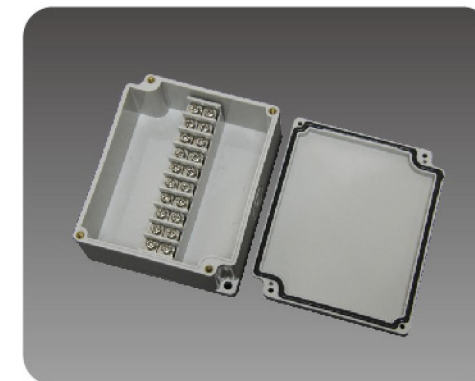


型号 (Model) : ZX-AG-10P-M 尺寸 (Size) : 91×110×43mm

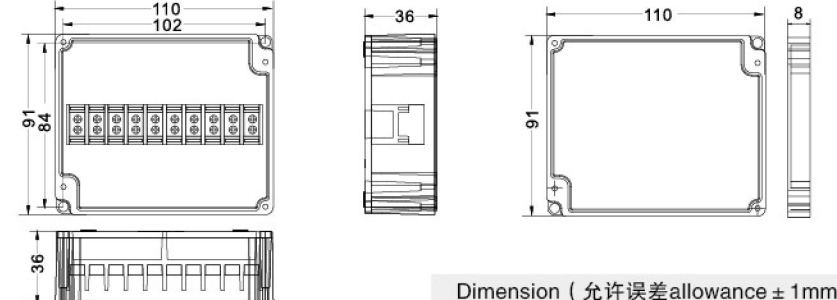

Dimension (允许误差allowance ± 1mm)




型号 (Model) : ZX-AG-6P-K 尺寸 (Size) : 55×91×43mm

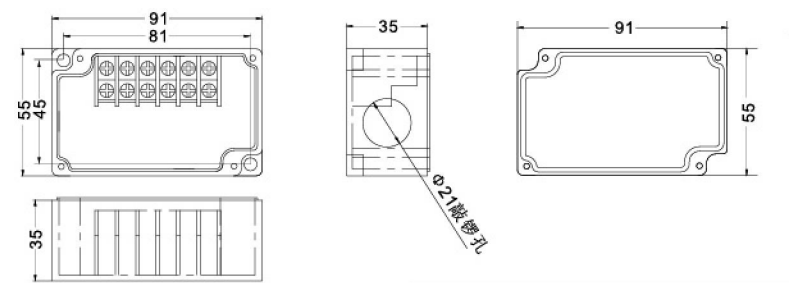


Dimension (允许误差allowance ± 1mm)




型号 (Model) : ZX-AG-15P 尺寸 (Size) : 100×180×55mm

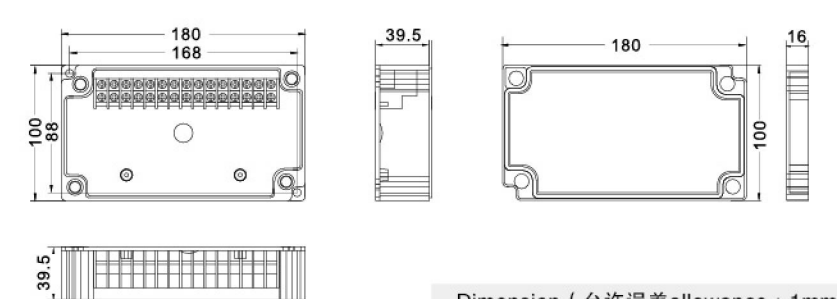

Dimension (允许误差allowance ± 1mm)

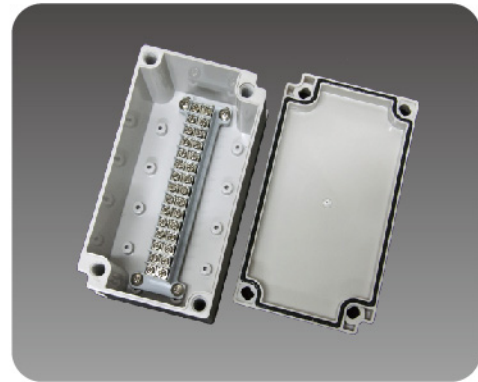


型号 (Model) : ZX-AG-15P-M 尺寸 (Size) : 100 × 180 × 75mm

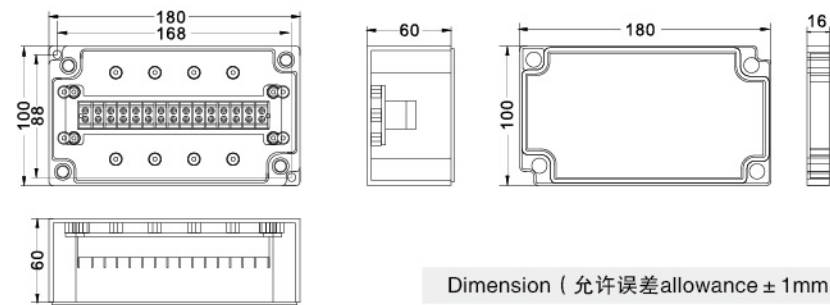

Dimension (允许误差allowance ± 1mm)




型号 (Model) : ZX-AG-30P-M 尺寸 (Size) : 200 × 200 × 95mm

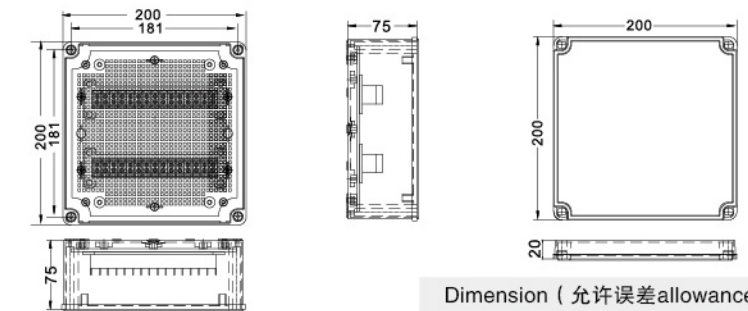


Dimension (允许误差allowance ± 1mm)




型号 (Model) : ZX-AG-15P-S 尺寸 (Size) : 100 × 180 × 75mm

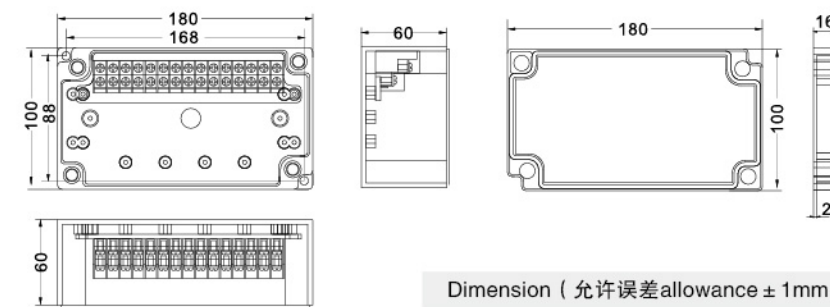

Dimension (允许误差allowance ± 1mm)

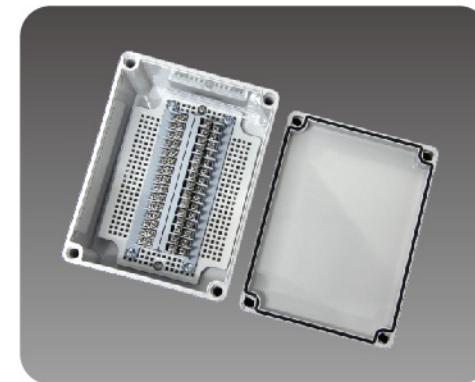


型号 (Model) : ZX-AG-30P-S 尺寸 (Size) : 150 × 200 × 100mm

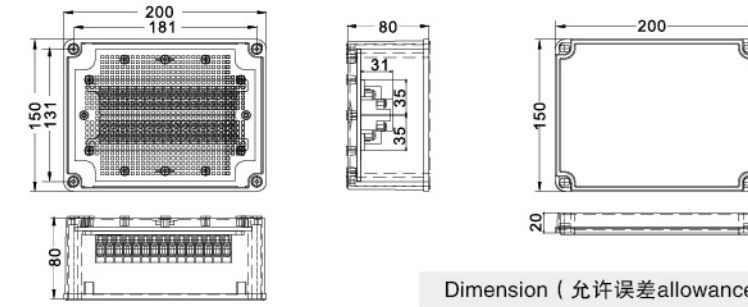


Dimension (允许误差allowance ± 1mm)




型号 (Model) : ZX-AG-20P-M 尺寸 (Size) : 100 × 223 × 75mm

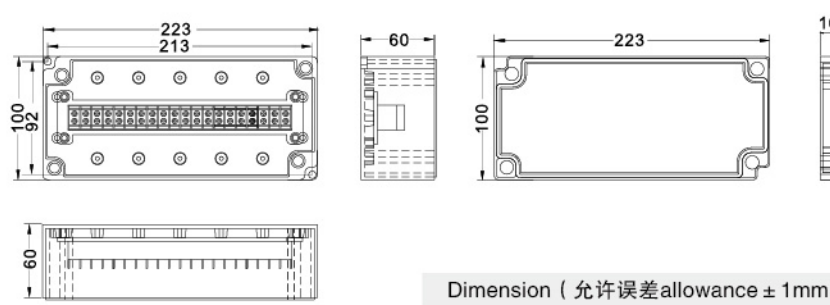

Dimension (允许误差allowance ± 1mm)

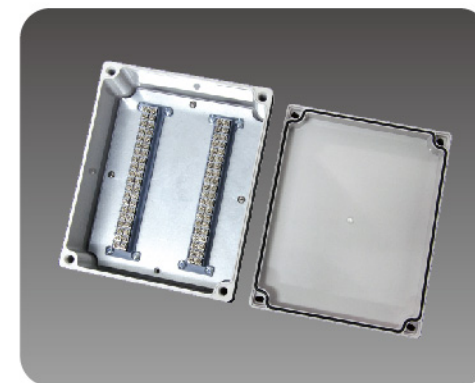


型号 (Model) : ZX-AG-40P-M 尺寸 (Size) : 200 × 250 × 100mm

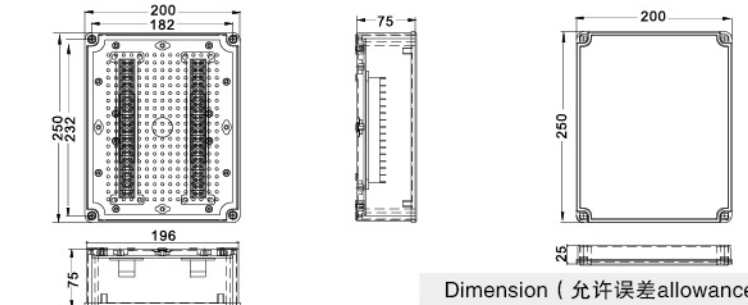


Dimension (允许误差allowance ± 1mm)




型号 (Model) : ZX-AG-20P-S 尺寸 (Size) : 100 × 223 × 75mm

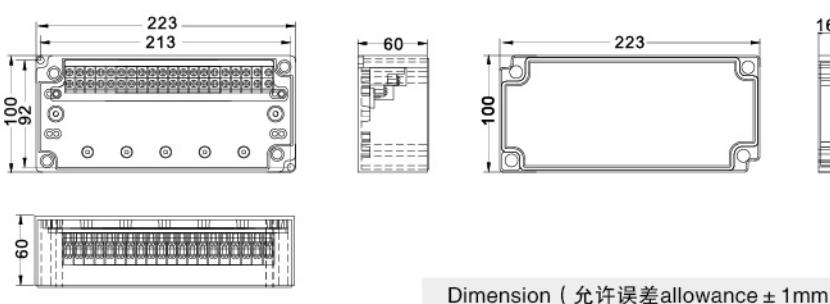


Dimension (允许误差allowance ± 1mm)

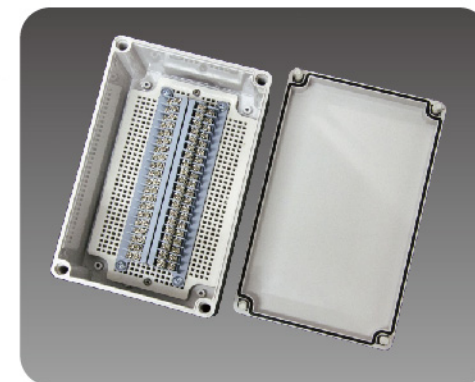


型号 (Model) : ZX-AG-40P-S 尺寸 (Size) : 150 × 250 × 100mm

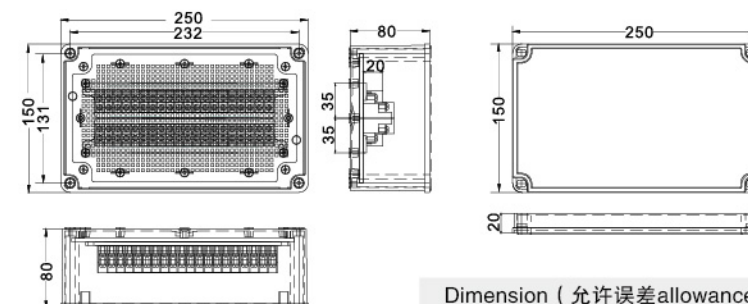

Dimension (允许误差allowance ± 1mm)

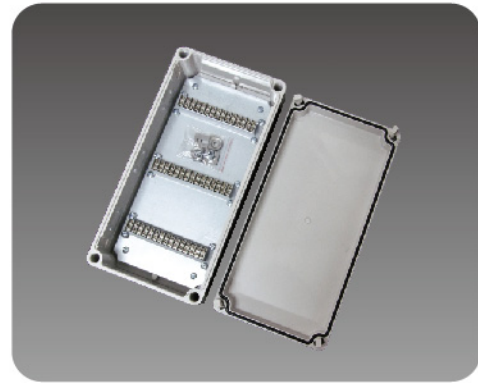


型号 (Model) : ZX-AG-45P 尺寸 (Size) : 380 × 190 × 100mm

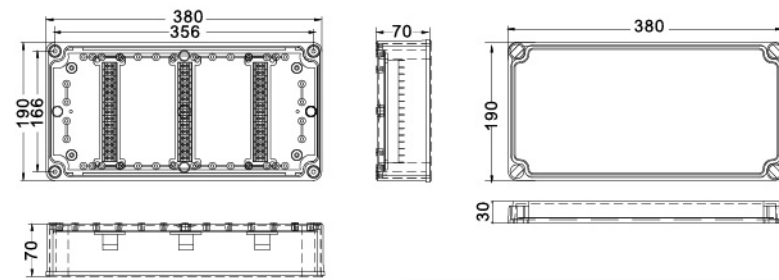

Dimension (允许误差allowance ± 1mm)




型号 (Model) : ZX-AG-50P 尺寸 (Size) : 380 × 190 × 100mm

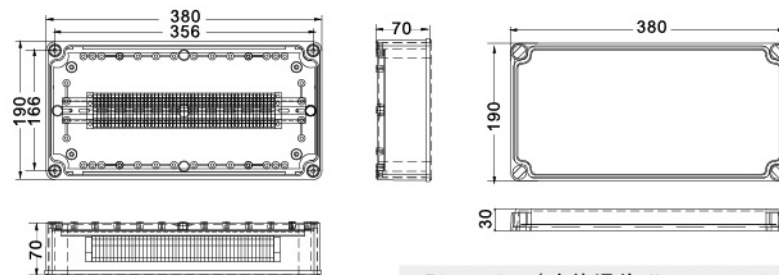

Dimension (允许误差allowance ± 1mm)




型号 (Model) : ZX-AG-60P 尺寸 (Size) : 380 × 190 × 100mm

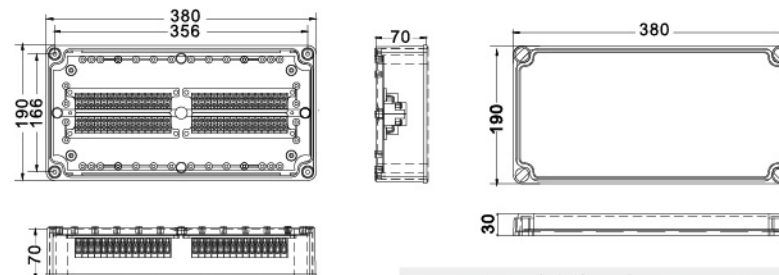


Dimension (允许误差allowance ± 1mm)




TB-AG-15P-M

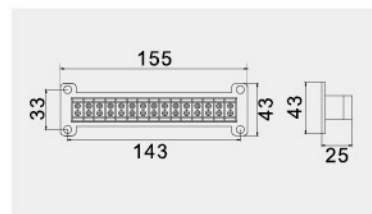


TB-AG-15P-S

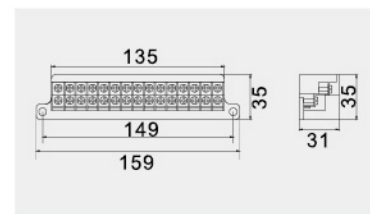

TB-AG-20P-M

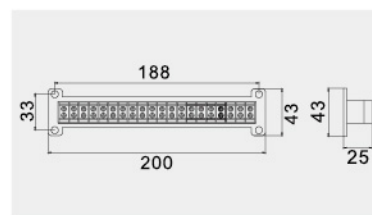

TB-AG-20P-S

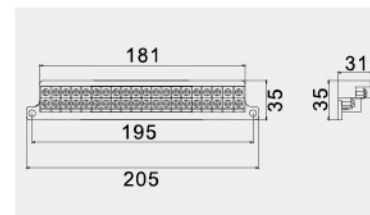

塑料按钮盒 Plastic button box



Size W H D	产品型号 Product model
80 × 80 × 60	ZX-AGS-01
80 × 130 × 70	ZX-AGS-02
80 × 180 × 70	ZX-AGS-03
80 × 180 × 70	ZX-AGS-04
80 × 250 × 70	ZX-AGS-05

Size W H D	产品型号 Product model
150 × 200 × 100	ZX-AGS-06
150 × 200 × 100	ZX-AGS-07
150 × 250 × 100	ZX-AGS-08
200 × 300 × 105	ZX-AGS-09
200 × 300 × 105	ZX-AGS-10

防尘防水等级	IP 66
温度范围	-40~+120

注：可要客户要求选型和开孔。


铸铝按钮盒 Cast aluminum button box



防尘防水等级	IP 66
温度范围	-50~+140

Size W H D	产品型号 Product model
75 × 80 × 57	ZX-AL-01
80 × 125 × 57	ZX-AL-02
80 × 175 × 57	ZX-AL-03
80 × 175 × 57	ZX-AL-04
80 × 250 × 57	ZX-AL-05
80 × 250 × 57	ZX-AL-06
140 × 220 × 80	ZX-AL-07
140 × 220 × 80	ZX-AL-08
140 × 220 × 80	ZX-AL-09
140 × 220 × 80	ZX-AL-10

注：可要客户要求选型和开孔。

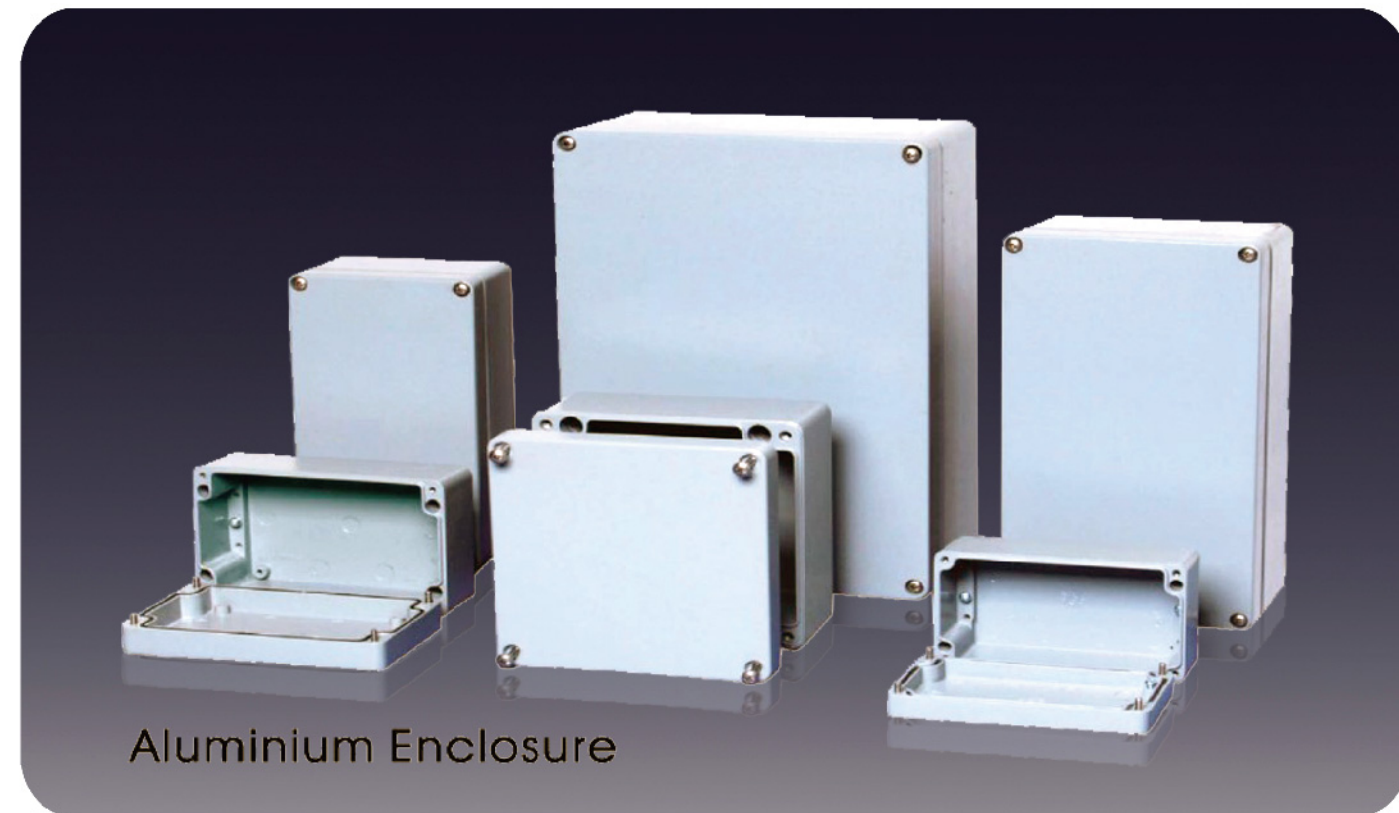

产品特征 Product characteristics

1. 适合各种产业中间接线盒、端子盒、小型机电仪表器、通信接触盒等设备用。价格经济，操作简便。
 2. 压铸铝材质密封箱适合机械、船舶、汽车、生产流水线等各种设备石化产业与恶劣环境都可使用。耐冲击性强、耐化学性高。
 3. 用于矿产或化学等EX区域保护端子板和电子设备等增安型防爆电气密封箱。
1. It is widely used in various industries,for such equipment as halfway junctionboxes,terminal boxes,miniature electro mechanical instruments,communication contact boxes,etc,has advantages of reasonable price and easy operation.
 2. The die-cast aluminum seal box is applicable for machineries,ships,automobiles,production lines and other equipment,suitable for petrochemical industry and other severe environment;it is featured with high impact resistance and good chemical resistance.
 3. The increased safety type explosion proof electric seal box is suitable for mineral in dustry,chemical industry,or other EX areas,for protecting the terminal blocks,electronic equipment and so on.

标准配置

箱体、箱盖、盖板、螺丝

工艺特点

1. 材料：压铸铝合金AlSi12
2. 密封条：硅橡胶（可提供特种密封条）
3. 防护等级：IP66（可提供认证）
4. 使用环境温度：-50℃至+130℃
5. 盒盖螺钉：不锈钢十字槽（不易脱落）
6. 颜色：银灰（可提供特殊颜色）

Standard Supply:


Aluminum box PUR Seal Stainless screws,M4 screws

Specification:

Material:AISI 12 DINI 725 Standard
 Protection Degree:IP66 EN60529 Standard
 Resistance to Impact:>7 Joule EN50014 Standard
 Temperature Range:-50℃ to 130℃
 Paint Finish:Epoxy polyester powder coating
 Color:RAL7001

高端型铸铝盒 High-end aluminum boxes

尺寸详解 (Detailed size)

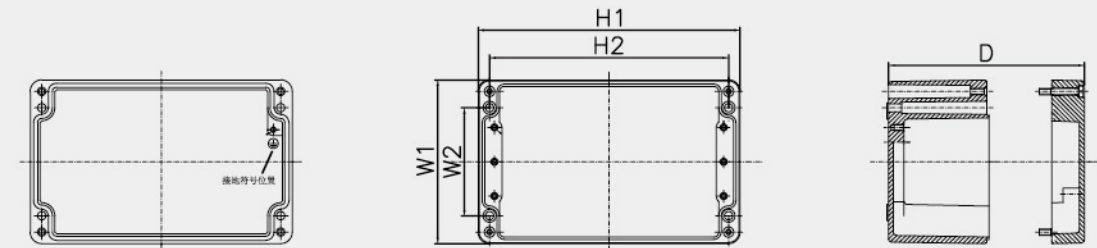

Dimension (允许误差allowance ± 1mm)

尺寸(mm)	型号	W1(mm)	H 1(mm)	D(mm)	W2(mm)	H 2(mm)
75 × 80 × 57	ZX-AL-070805	75	80	57	52	63
80 × 80 × 60	ZX-AL-080806	80	80	60	52	68
80 × 125 × 57	ZX-AL-081205	80	125	57	52	113
80 × 140 × 60	ZX-AL-081406	80	140	60	52	128
80 × 175 × 57	ZX-AL-081705	80	175	57	52	163
80 × 250 × 57	ZX-AL-082505	80	250	57	52	238
100 × 100 × 80	ZX-AL-101008	100	100	80	66	86
100 × 160 × 70	ZX-AL-101607	100	160	70	63	146
100 × 160 × 80	ZX-AL-101608	100	160	80	66	146
120 × 122 × 80	ZX-AL-121208	120	122	80	82	106
120 × 220 × 80	ZX-AL-122208	120	220	80	82	204
120 × 220 × 90	ZX-AL-122209	120	220	90	82	204
140 × 220 × 80	ZX-AL-142208	140	220	80	100	204
150 × 270 × 90	ZX-AL-152709	150	270	90	110	254
160 × 160 × 90	ZX-AL-161609	160	160	90	110	140
160 × 260 × 90	ZX-AL-162609	160	260	90	110	240
160 × 360 × 90	ZX-AL-163609	160	360	90	110	340
170 × 200 × 90	ZX-AL-172009	170	200	90	120	182
180 × 280 × 100	ZX-AL-182810	180	280	100	130	260
200 × 230 × 110	ZX-AL-202311	200	230	110	180	180
200 × 230 × 120	ZX-AL-202312	200	230	120	180	180
230 × 280 × 110	ZX-AL-232811	230	280	110	180	260
230 × 330 × 110	ZX-AL-233311	230	330	110	180	310
230 × 330 × 120	ZX-AL-233312	230	330	120	180	310
230 × 330 × 180	ZX-AL-233318	230	330	180	180	310
230 × 400 × 110	ZX-AL-234011	230	400	110	180	380
230 × 600 × 130	ZX-AL-236013	230	600	130	180	580
310 × 403 × 110	ZX-AL-314011	310	403	110	261	382.5
313 × 404 × 140	ZX-AL-314014	313	404	140	261	382.5


经济型铸铝盒 Economical aluminum boxes

尺寸 (mm)	型号	备注	尺寸 (mm)	型号	备注
36 × 90 × 31	ZX-AL-030903		145 × 222 × 55	ZX-AL-142205-1	六孔螺丝
58 × 64 × 35	ZX-AL-050603		145 × 222 × 75	ZX-AL-142207	六孔螺丝
64 × 98 × 36	ZX-AL-060903		145 × 222 × 80	ZX-AL-142208-1	
64 × 111 × 37	ZX-AL-061103		150 × 228 × 75	ZX-AL-152207	无窗
64 × 150 × 37	ZX-AL-061503		150 × 228 × 75	ZX-AL-152207-1	有窗
65 × 115 × 55	ZX-AL-061105		150 × 228 × 90	ZX-AL-152209	
68 × 100 × 50	ZX-AL-061005	翻盖带凹槽	155 × 220 × 95	ZX-AL-152209-1	翻盖带凹槽
75 × 80 × 57	ZX-AL-070805-1		160 × 160 × 70	ZX-AL-161607	
75 × 80 × 60	ZX-AL-070806		160 × 160 × 86	ZX-AL-161608	翻盖带凹槽
80 × 120 × 55	ZX-AL-081205-1	四孔螺丝	160 × 160 × 90	ZX-AL-161609-1	
80 × 120 × 55	ZX-AL-081205-2	六孔螺丝	160 × 240 × 75	ZX-AL-162407	
80 × 125 × 58	ZX-AL-081205-3		160 × 240 × 100	ZX-AL-162410	
85 × 135 × 56	ZX-AL-081305		160 × 360 × 95	ZX-AL-163609-1	
80 × 175 × 56	ZX-AL-081705-1		160 × 360 × 135	ZX-AL-163613	
80 × 175 × 80	ZX-AL-081708		190 × 250 × 78	ZX-AL-192507	
80 × 250 × 60	ZX-AL-082506		185 × 250 × 88	ZX-AL-182508	无窗带凹槽
80 × 250 × 80	ZX-AL-082508		185 × 250 × 88	ZX-AL-182508-1	有窗
90 × 115 × 58	ZX-AL-091105		185 × 250 × 88	ZX-AL-182508-2	无窗带挂脚
90 × 115 × 60	ZX-AL-091106	翻盖带凹槽	185 × 250 × 88	ZX-AL-182508-3	无窗无凹槽
95 × 165 × 39	ZX-AL-091603		185 × 260 × 96	ZX-AL-182609	
100 × 100 × 80	ZX-AL-101008-1		185 × 260 × 128	ZX-AL-182612	
100 × 145 × 45	ZX-AL-101404		185 × 265 × 75	ZX-AL-182607	
100 × 150 × 80	ZX-AL-101508		185 × 280 × 80	ZX-AL-182808	放大器
100 × 160 × 60	ZX-AL-101606		210 × 300 × 100	ZX-AL-213010	
100 × 160 × 65	ZX-AL-101606-1		210 × 300 × 130	ZX-AL-213013	
120 × 120 × 82	ZX-AL-121208-1		230 × 280 × 110	ZX-AL-232811-1	
120 × 120 × 90	ZX-AL-121209		235 × 340 × 95	ZX-AL-233409	
120 × 188 × 78	ZX-AL-121807	四孔螺丝	235 × 340 × 95	ZX-AL-233409-1	翻盖
120 × 188 × 78	ZX-AL-121807-1	六孔螺丝	235 × 340 × 115	ZX-AL-233411	翻盖带挂脚
120 × 250 × 82	ZX-AL-122508		235 × 340 × 120	ZX-AL-233412	
120 × 320 × 90	ZX-AL-123209		235 × 340 × 120	ZX-AL-233412-1	翻盖
120 × 360 × 80	ZX-AL-123608		235 × 340 × 135	ZX-AL-233413	
130 × 200 × 80	ZX-AL-132008		235 × 340 × 135	ZX-AL-233413-1	翻盖
130 × 200 × 85	ZX-AL-132008-1		235 × 340 × 155	ZX-AL-233415	翻盖带挂脚
135 × 185 × 85	ZX-AL-131808	翻盖带凹槽	235 × 340 × 160	ZX-AL-233416	
140 × 140 × 75	ZX-AL-141407		235 × 340 × 160	ZX-AL-233416-1	翻盖
140 × 180 × 55	ZX-AL-141805	翻盖带凹槽带挂脚	260 × 400 × 110	ZX-AL-264011	
145 × 222 × 55	ZX-AL-142205	四孔螺丝	310 × 400 × 110	ZX-AL-314011-1	

安装方式 way to install




通过盒体的通孔用螺丝直接固定

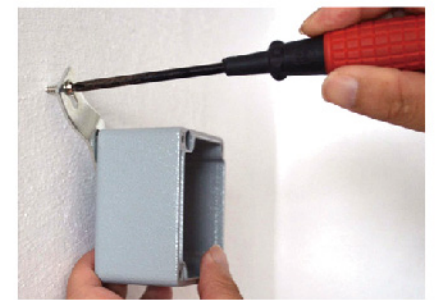


通过安装挂脚固定

加工案例 Processing case

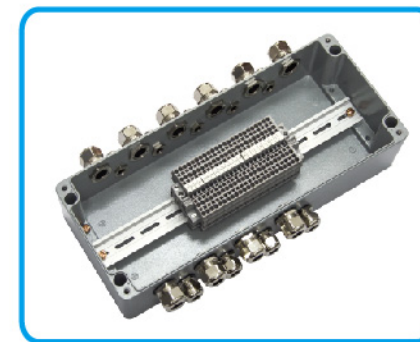▲ 配防水接头
With waterproof connectors▲ 丝网印刷
Silk screen printing▲ 机械开孔
mechanical holing▲ 配接线端子
With terminal block▲ 配开关按钮
With the switch button▲ 颜色定制
Custom color

聚酯接线盒

Polyester junction box

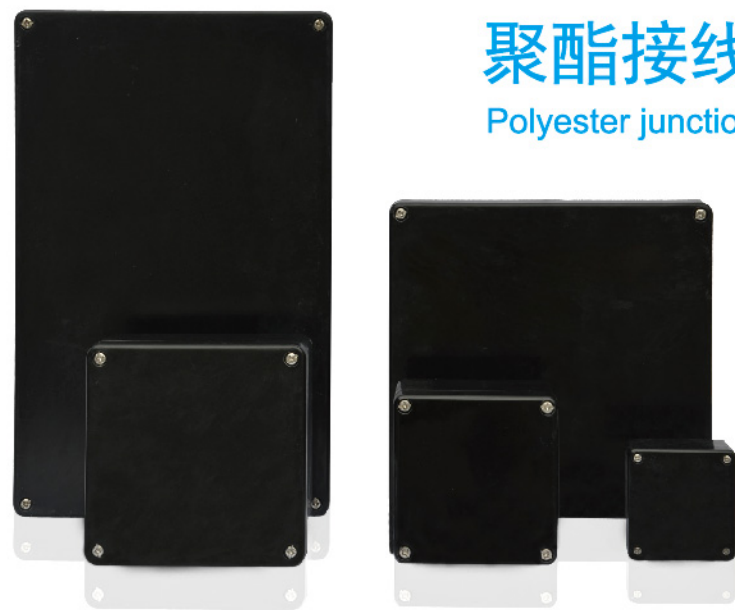

产品特征 Product characteristics

玻璃纤维(GRP)增强聚酯接线盒采用DMC或SMC复合材料作为外壳成型材料, SMC复合材料是以不饱和聚酯树脂为基体, 玻璃纤维为骨架, 主填料、颜料助剂组成的, SMC复合材料具有机械强度高、材料重量轻、耐腐蚀、使用寿命长, 绝缘强度高、耐电弧、阻燃等优点, 且产品设计灵活, 易规模化生产的优点。

工艺特点

材料: 玻璃纤维增强聚酯 (GRP)

防护等级: 可达IP66以上

颜色: 黑色, 灰色

密封条: 硅橡胶 (可提供特种密封条)

使用环境温度: -50°C 至 $+150^{\circ}\text{C}$ (短期) -40°C 至 $+70^{\circ}\text{C}$ (长期)

盒盖螺钉: 不锈钢十字螺钉 (防脱落)


内部安装: 接线盒内可安装接线端子、按钮、线路板或其他电气元件

加工服务: 可根据客户要求钻孔 (通孔, 螺纹孔, 方孔等), 及成套配装导轨, 接线端子等

优点: 耐化学腐蚀性良好, 抗冲击性良好, 构造坚固, 可以在多样的气候条件下使用, 温度适用范围广, 阻燃, 绝缘性良好

缺点: 不能用一般工具加工, 不能阻断静电 (EMC), 比其它塑料盒重

尺寸详解 (Detailed size)

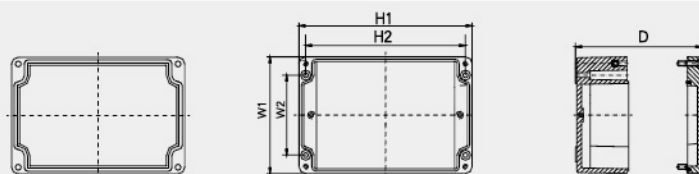

Dimension (允许误差allowance $\pm 1\text{mm}$)

尺寸 (mm)	型号	W1 (mm)	H1 (mm)	D (mm)	W2 (mm)	H2 (mm)
75 × 80 × 56	ZX-EX-070805	75	80	56	45	68
75 × 110 × 56	ZX-EX-071105	75	110	56	45	98
120 × 122 × 91	ZX-EX-121209	120	122	91	82	106
160 × 160 × 91	ZX-EX-161609	160	160	91	110	140
160 × 260 × 91	ZX-EX-162609	160	260	91	110	240
250 × 255 × 121	ZX-EX-252512	250	255	121	200	235
250 × 400 × 121	ZX-EX-254012	250	400	121	200	380
250 × 600 × 121	ZX-EX-256012	250	600	121	200	580



产品说明:

箱体: 造型别致, 坚固耐用, 操作自如。

材料: 尼龙 (箱体和手柄)

面板: 铝板, 阳极氧化

防护等级: IP65

密封: EPDM

适用温度: -40°C 至 $+40^{\circ}\text{C}$

箱体颜色: 黄色

面板颜色: 银灰色 (黑色可定制)


应用: 广泛用于机械设备, 数控手轮, 急停按钮, 一般按钮, 轻触, 轻触薄膜按钮等。

服务: 可提供开孔、定制PVC面板等特殊加工。



型号 (Model): HOB-090


尺寸 (Size): 90 × 90 × 85mm

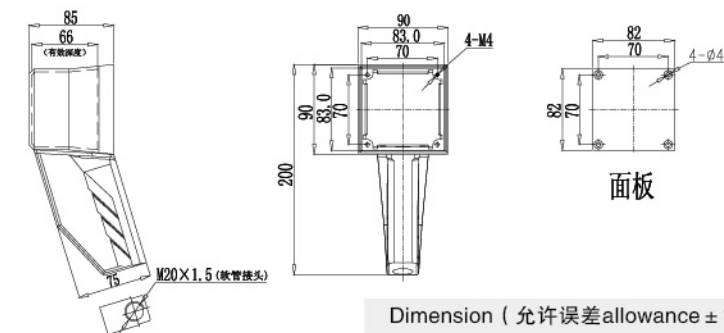

Dimension (允许误差allowance $\pm 1\text{mm}$)

型号 (Model): HOB-110


尺寸 (Size): 110 × 165 × 85mm

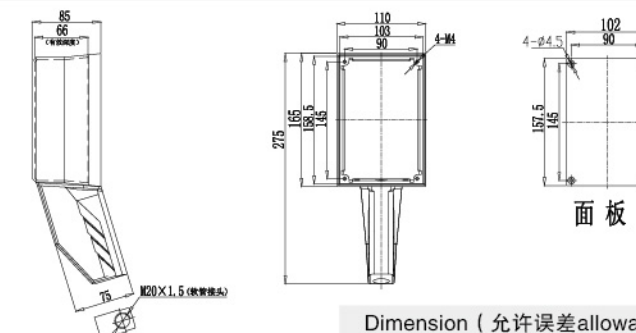

Dimension (允许误差allowance $\pm 1\text{mm}$)

型号 (Model): HOB-165

尺寸 (Size): 165 × 110 × 85mm

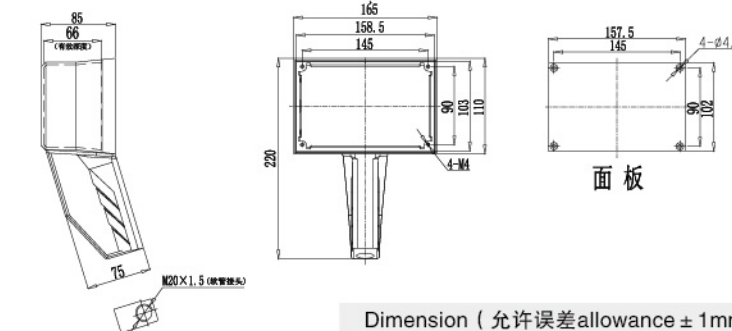

Dimension (允许误差allowance $\pm 1\text{mm}$)



型号规格 Model and size





Size	产品型号 Product model (Screw type)	内板型号 Plate Model	盒体高度 Height of box		盒体壁厚 Thickness of box		安装尺寸 Installation dimensions		金属内板规格 Plate Size	
W H D	PC	Metal(金属)	盖	底	盖	底	宽	长	M1	M2
	盖:灰色PC 盒体: 灰色PC Cover: Grey PC Body: Grey PC		(Cover)	(Bottom)	(Cover)	(Bottom)	(Width)	(Length)		
220×340×150	ZX-PCS-223415	ZX-2234	47	103	5	5	193	313	195	315
300×400×160	ZX-PCS-304016	ZX-3040	57	103	5	5	273	373	273	373
270×460×160	ZX-PCS-274616	ZX-2746	57	103	5	5	243	433 (178+255)	243	433
300×520×160	ZX-PCS-305216	ZX-3052	57	103	5	6.5	273	493(246.5+246.5)	273	493
360×540×180	ZX-PCS-365418	ZX-3654	57	123	5	6.5	333	513(256.5+256.2)	326	506
500×680×200	ZX-PCS-506820	ZX-5068	57	143	5	6.5	473	653(326.5+326.5)	465	645


产品特征 Product characteristics

1. 防水、防尘、耐腐蚀、高强度绝缘。
2. 可根据用户需求随意开孔，规格齐全，安装方便。
1. Waterproof, dustproof, anticorrosion, high-strength insulation.
2. Any opening is available according to the customers' demands, it is very complete in specification and convenient in installation.


产品展示 Product display

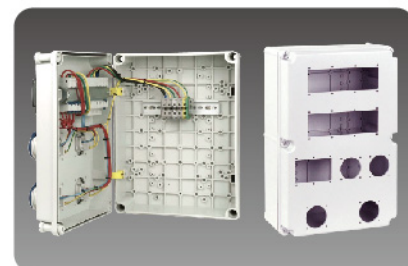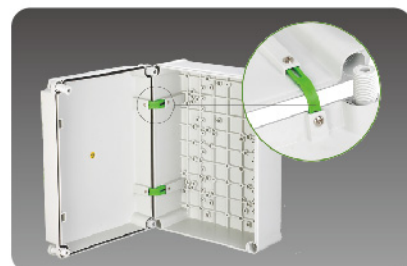


型号 (Model) : ZX-PCS-223415 尺寸 (Size) : 220 × 340 × 150mm

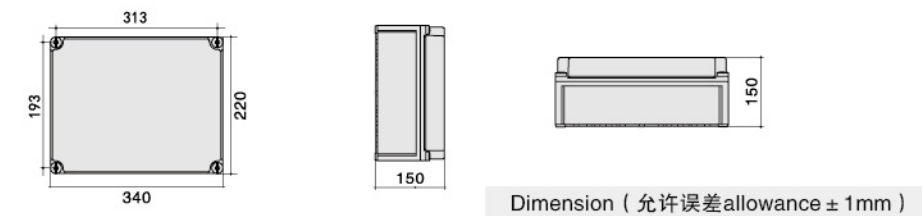


型号 (Model) : ZX-PCS-304016 尺寸 (Size) : 300 × 400 × 160mm

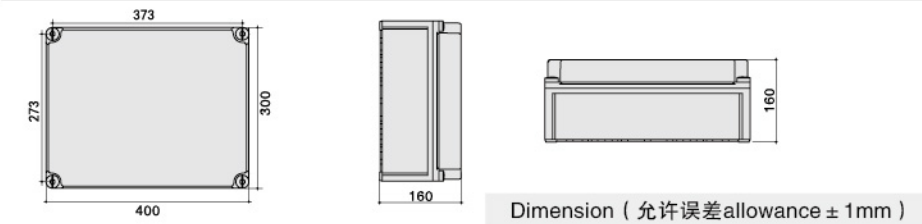


型号 (Model) : ZX-PCS-274616 尺寸 (Size) : 270 × 460 × 160mm

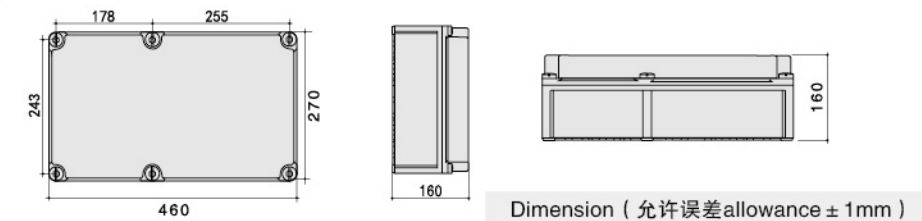


型号 (Model) : ZX-PCS-305216 尺寸 (Size) : 300 × 520 × 160mm

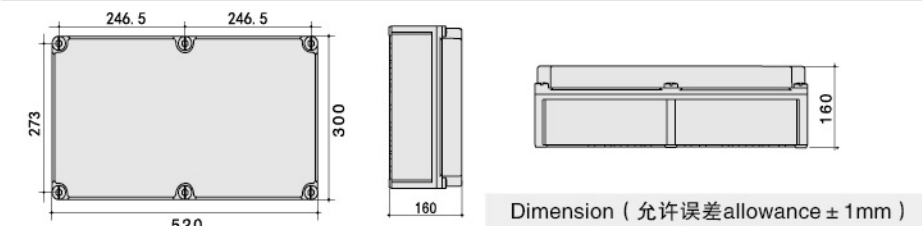

型号 (Model) : ZX-PCS-365418 尺寸 (Size) : 360 × 540 × 180mm

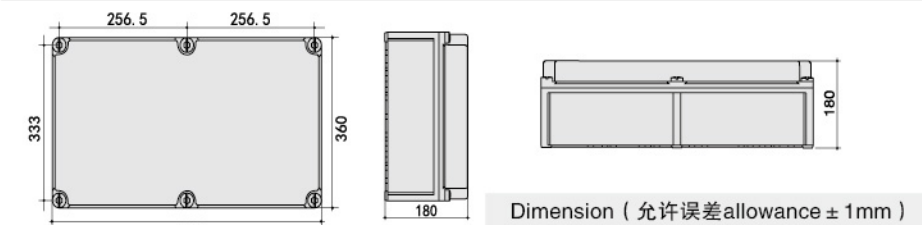

型号 (Model) : ZX-PCS-506820 尺寸 (Size) : 500 × 680 × 200mm

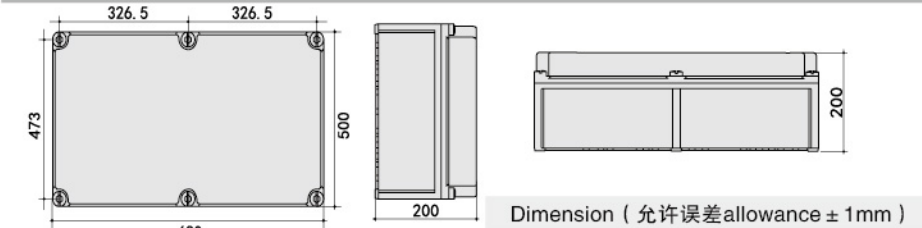




产品特征 Product characteristics



1. 适用于防水、防尘、防腐蚀等特殊场合。
2. 符合标准：IEC60529 IP67
EN60309

1. It is applicable for special waterproof, dustproof and corrosion-proof locations
2. Executive standard: IEC60529 IP67
EN60309

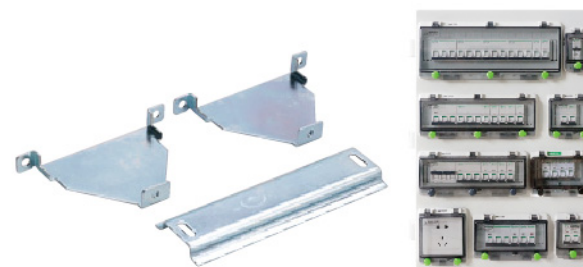


产品展示 Product display



型号 (Model) : ZX-2B

尺寸 (Size) : 57×98×31mm

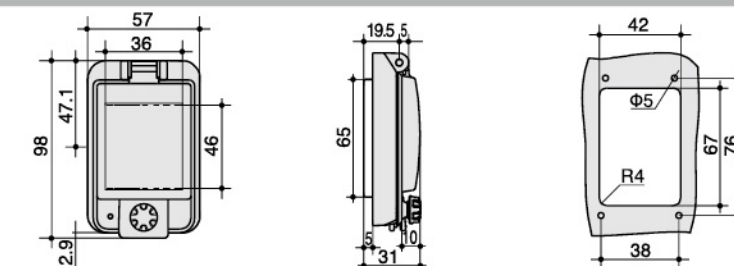


Dimension (允许误差allowance ± 1mm)



型号 (Model) : ZX-3B

尺寸 (Size) : 75×98×31mm

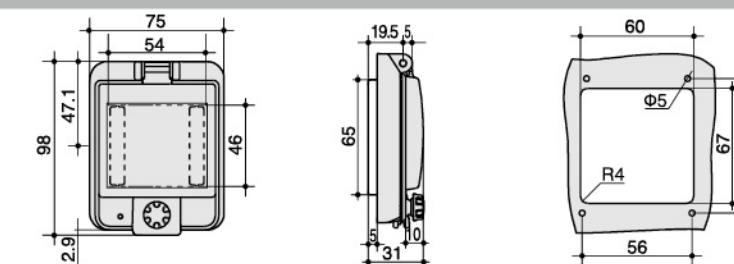


Dimension (允许误差allowance ± 1mm)



型号 (Model) : ZX-4B

尺寸 (Size) : 93×98×31mm

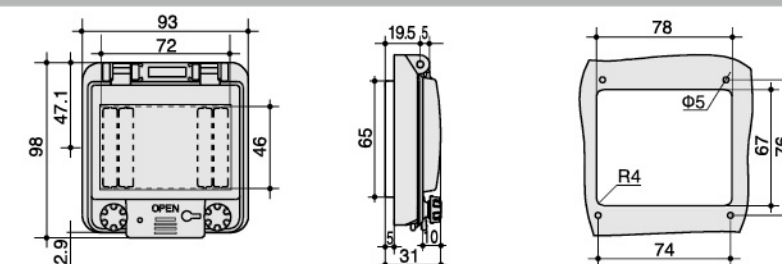


Dimension (允许误差allowance ± 1mm)



型号 (Model) : ZX-5B

尺寸 (Size) : 107×125×31mm

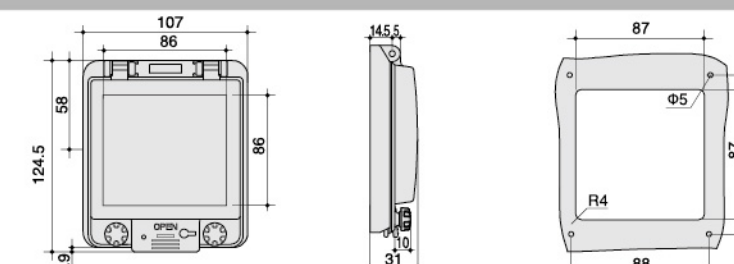


Dimension (允许误差allowance ± 1mm)



型号 (Model) : ZX-6B

尺寸 (Size) : 129×98×31mm

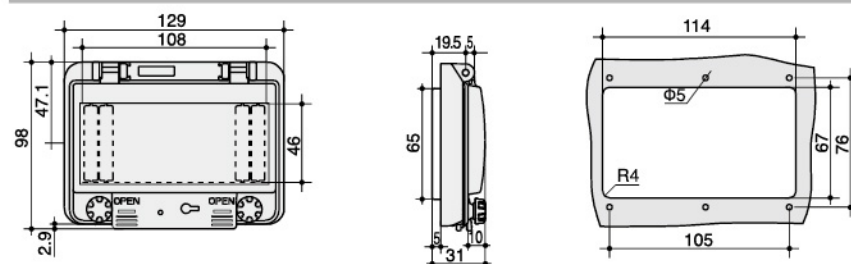


Dimension (允许误差allowance ± 1mm)



型号 (Model) : ZX-13B

尺寸 (Size) : 255×98×31mm

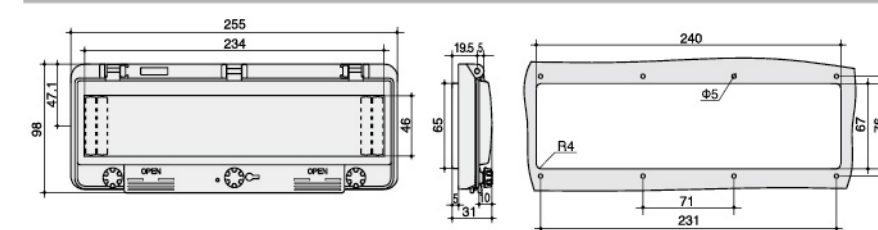


Dimension (允许误差allowance ± 1mm)



型号 (Model) : ZX-8B

尺寸 (Size) : 165×98×31mm

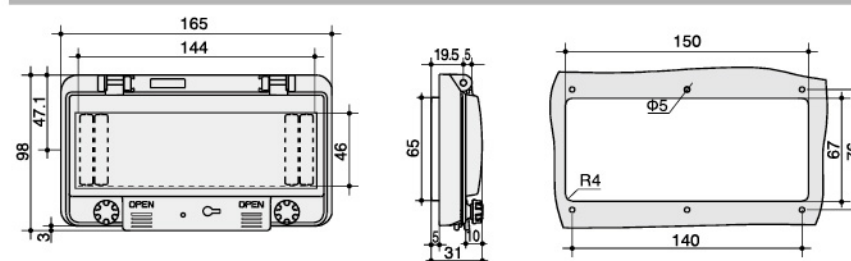


Dimension (允许误差allowance ± 1mm)



型号 (Model) : ZX-16B

尺寸 (Size) : 309×125×31mm

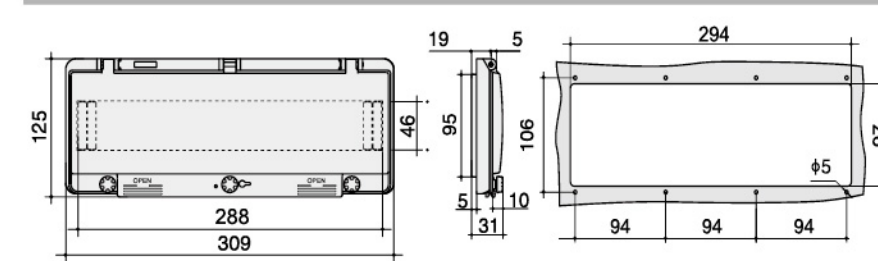


Dimension (允许误差allowance ± 1mm)




型号 (Model) : ZX-10B

尺寸 (Size) : 202×98×31mm

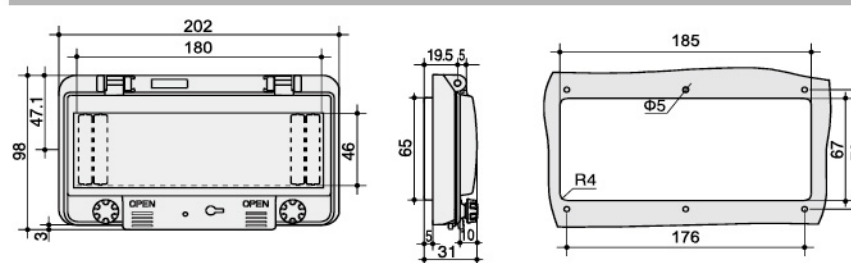


Dimension (允许误差allowance ± 1mm)

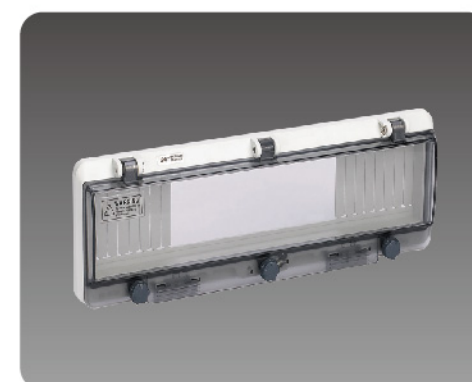

型号 (Model) : ZX-16A

尺寸 (Size) : 309×98×31mm

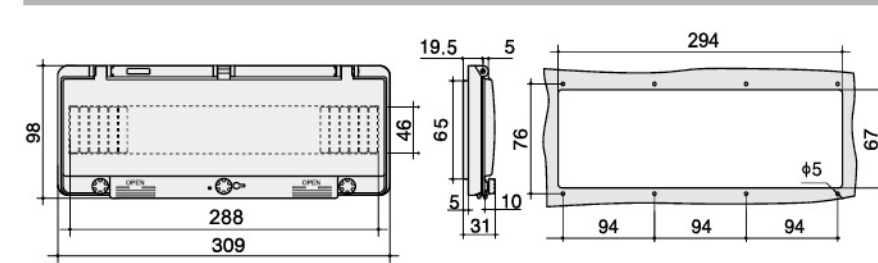


Dimension (允许误差allowance ± 1mm)



型号 (Model) : ZX-12B

尺寸 (Size) : 237×98×31mm

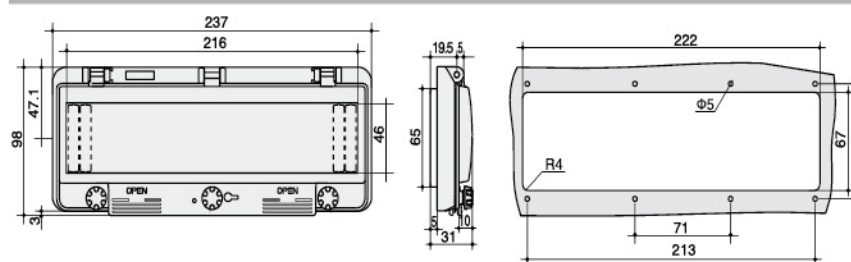


Dimension (允许误差allowance ± 1mm)



型号 (Model) : ZX-18B

尺寸 (Size) : 347×98×31mm

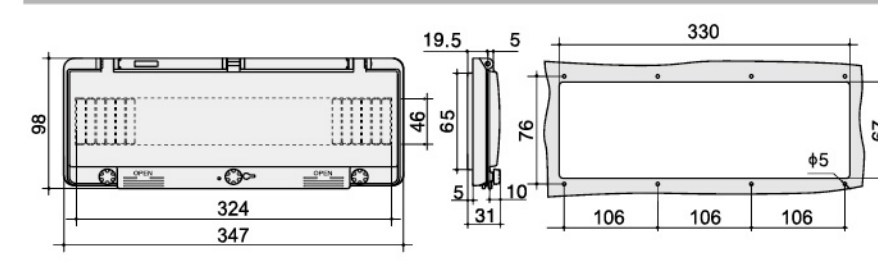


Dimension (允许误差allowance ± 1mm)




型号 (Model) : ZX-2A

尺寸 (Size) : 55 × 100 × 43mm

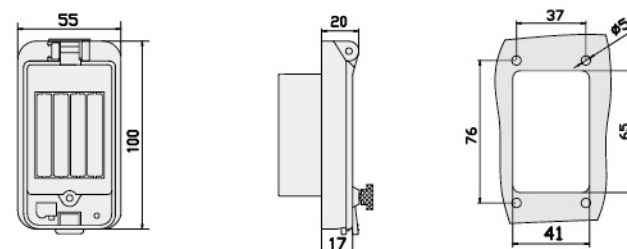


Dimension (允许误差allowance ± 1mm)

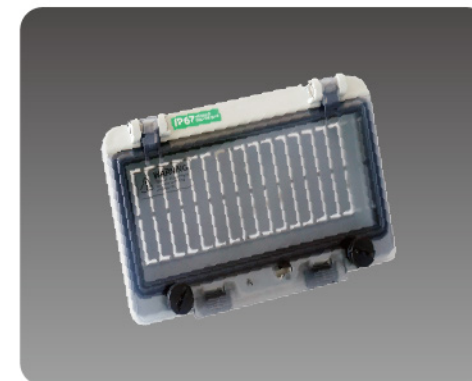

型号 (Model) : ZX-8

尺寸 (Size) : 95 × 163 × 43mm

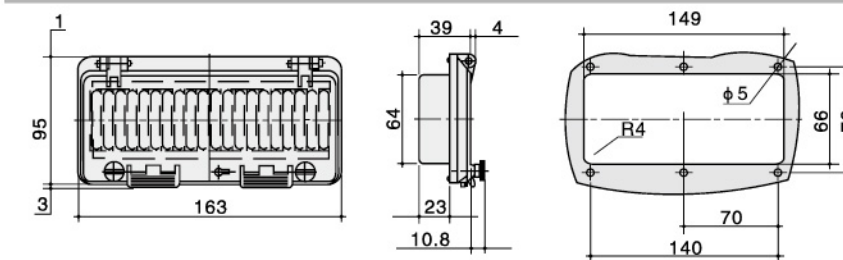


Dimension (允许误差allowance ± 1mm)



型号 (Model) : ZX-2

尺寸 (Size) : 49 × 78 × 19mm

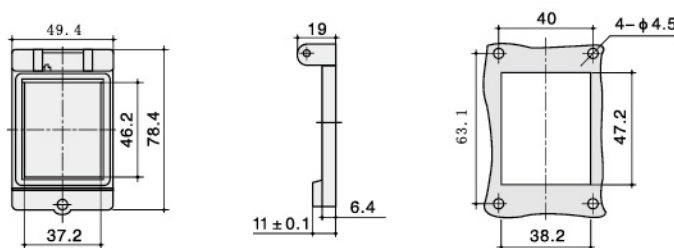


Dimension (允许误差allowance ± 1mm)



型号 (Model) : ZX-12

尺寸 (Size) : 95 × 235 × 43mm

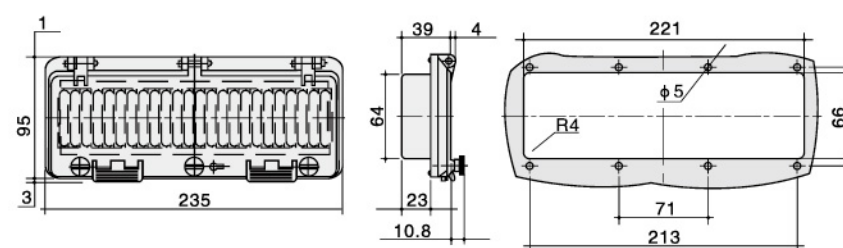


Dimension (允许误差allowance ± 1mm)




型号 (Model) : ZX-4


尺寸 (Size) : 91 × 93 × 43mm

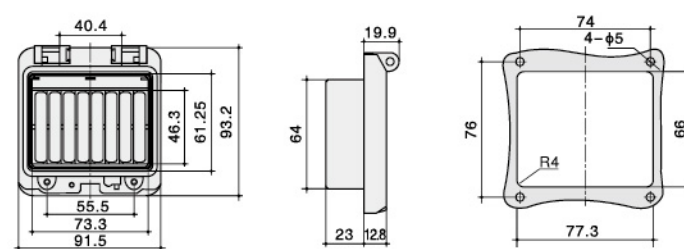

Dimension (允许误差allowance ± 1mm)

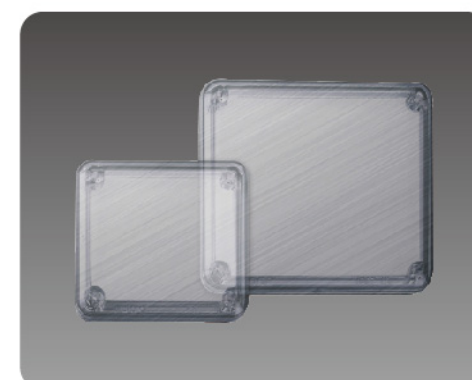

透视配电箱窗口

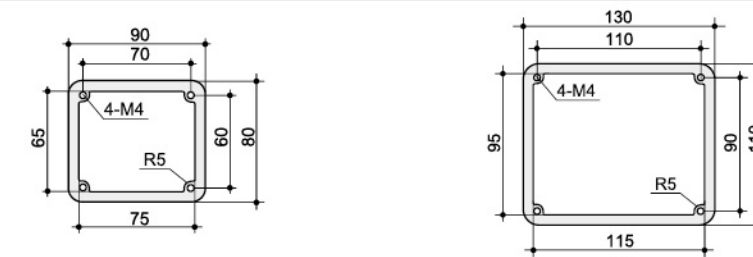


Dimension (允许误差allowance ± 1mm)



型号 (Model) : ZX-6

尺寸 (Size) : 95 × 127 × 43mm

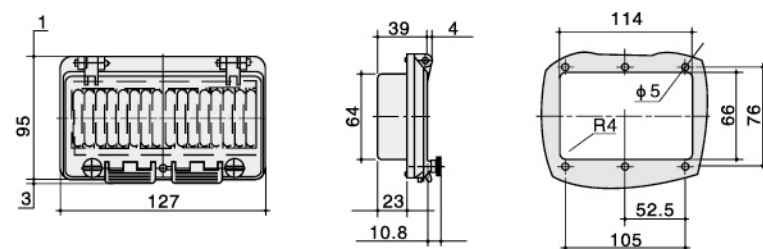

Dimension (允许误差allowance ± 1mm)



Ployester Enclosure

RoHS

IP66




玻璃纤维箱

TIP系列是新型的开关箱，它由玻璃纤维强化多元酯所制造，达到IP66、IK9等级。多元酯的特性是它本身混合30%玻璃纤维来强化，使它达到一个高电阻和机械刚度（IK9）与重量约1/3的金属箱的效果。同金属箱相比，TIP系列具有重量更轻，更适应腐蚀、潮湿的环境等优点。


Ployester Enclosure

TIP series are new type, it made by polyesters. The characteristics of the polyesters is its own mix 30% fibre glass, make it reached high resistance and mechanical stiffness, have the same effect of metal enclosure which is 3 times heavier than it. Compared with metal enclosure, TIP series are lighter, more adequate for corrosion and dankish environment.


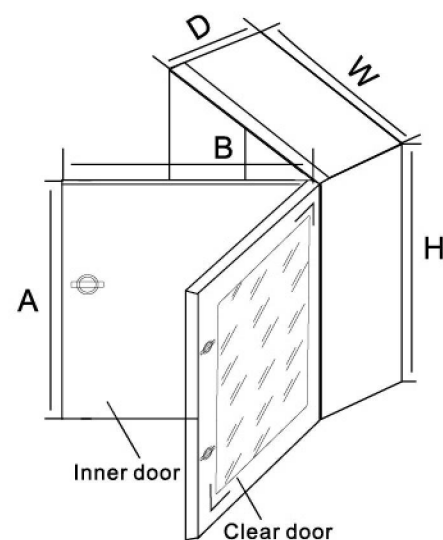


MODEL型号		Dimension		
Grey Door 灰色门	Transparent Door 透明门	W	H	D
TIP-325	TX-325	250	300	140
TIP-430	TX-430	300	400	200
TIP-440	TX-440	400	400	200
TIP-540	TX-540	400	500	200
TIP-640	TX-640	400	600	230
TIP-650	TX-650	500	600	230
TIP-860	TX-860	600	800	300
TIP-1080	TX-1080	1000	800	320

玻璃纤维底板
Polyester plate



铁底板
Mounting plate




Polyester plate 玻璃纤维底板	Dimension			Mounting plate 铁底板	Dimension	
	M	N	Z		C	E
PP-325	220	238	157	TI-325	263	201
PP-43	310	285	210	TI-43	353	245
PP-44	307	385	227	TI-44	349	345
PP-54	408	385	277	TI-54	453	345
PP-64	510	358	327	TI-64	553	345
PP-65	507	485	327	TI-65	553	447
PP-86	705	582	477	TI-86	749	540

宽度大于500以上的底板会被折弯。

If the C greater than 500, the floor will be bent, the table below for after bending size.

里门
Inner door

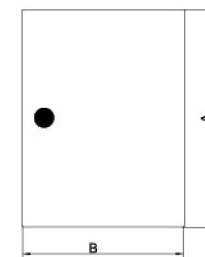

Inner door 里门	Dimension	
	A	B
TP-43	366	258
TP-44	366	358
TP-54	466	358
TP-64	566	358
TP-65	566	458
TP-86	766	658



FOR ALL TIP BOX

玻璃纤维箱的锁和挂墙钩

尼龙电缆防水接头（连体）
Nylon Cable Glands(United Structure)

产品特征 Product characteristics



1. 螺牙规格：公制牙（Metric）、PG牙。
2. 产品材质：A.C.F部分采用UL认可之尼龙PA66（防火等价UL94V-2）制成；
（可定制UL认可的V-0防火等级尼龙原料）；B.D部分采用三元乙丙耐候橡胶制成。
（可定制耐寒、耐高温橡胶；耐高酸碱、耐化学与抗腐蚀橡胶）。
3. 保护等级：IP68-10
4. 工作温度：静态-40℃至100℃，或瞬间可耐热至120℃；动态-20℃至80℃，或瞬间可耐热至100℃。
5. 产品特性：特殊夹紧爪与夹紧圈之设计，夹紧电缆范围大，抗拉力强，可防水、防尘、抗盐、耐酸碱、酒精、油、油脂及一般溶剂。
6. 颜色种类：黑色、灰色，其他颜色可定做。

注：特殊规格需要请联系工厂



1. Thread: Metric, PG
2. Materials: UL approved Nylon PA66(Flammability UL 94V-2) for A.C.F parts,
(Accept to make flammability UL 94V-0); EPDM rubber for B.D parts.
(Accept to make super rubber: resist high temperature rubber, resist strong acid/alkali, etc).
3. Protection degree: IP68-10Bar
4. Working temperature: -40℃ to 100℃ in static state, or instantaneous heat resistance up to 120℃;
-20℃ to 80℃ in dynamic state, or instantaneous heat resistance up to 100℃.
5. Features: The claws and seals of excellent design, sealing nut have a "click" sound and reopen, can hold cable firmly and have a wider cable range. resistant to salt water, weak acid, alcohol, oil, grease and common solvency.
6. Colours: Black(RAL9005), gray(RAL7035), other color available upon request.

Note: Special size and type, please contact us.

尼龙电缆防水接头（连体）Nylon Cable Glands(United Structure)


型号规格 Model and size

螺牙规格 Thread	电缆范围 Cable Range Φ(mm)	螺纹外径 Thread O.D. C1(mm)	螺纹长度 Thread Length C2(mm)	扳手径 Spanner Size A&F(mm)	开孔尺寸 Panel Mounting Hole (mm)	包装 Std. Pkg (pcs)
M8 × 1.25	2-4.8	8	7.5	13/12	8-8.3	50
M10 × 1.5	3-6	10	8	15/13	10-10.3	50
M12 × 1.5	4-8	12	8.5	18/19	12-12.3	50
M16 × 1.5	5-10	16	10	22/22	16-16.3	50
M18 × 1.5	5-10	18	10	24/22	18-18.3	50
M20 × 1.5	8.5-14	20	11	27/27	20-20.3	50
M22 × 1.5	8.5-14	22	11	27/27	22-22.3	50
M25 × 1.5	12.5-18	25	11.6	33/33	25-25.3	50
M32 × 1.5	17-25	32	15	41/42	32-32.3	30
M36 × 1.5	17-25	36	12	45/42	36-36.3	20
M40 × 1.5	23-32	40	15	50/52	40-40.3	10
M50 × 1.5	30-41	50	15	62/62	50-50.3	10
M63 × 1.5	35-46	63	18	75/75	63-63.3	10

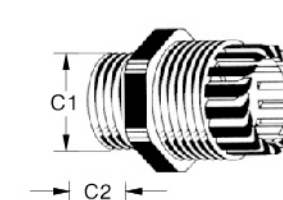A
Lock Nut
螺帽B
washer
垫片C
Body
基本幅体D
Seal
夹紧圈F
Sealing Nut
迫紧螺帽

型号规格 Model and size

螺牙规格 Thread	电缆范围 Cable Range Φ(mm)	螺纹外径 Thread O.D. C1(mm)	螺纹长度 Thread Length C2(mm)	扳手径 Spanner Size A&F(mm)	开孔尺寸 Panel Mounting Hole (mm)	包装 Std. Pkg (pcs)
PG7	4-8	12.5	8	17/19	12.5-12.8	50
PG9	4-8	15.2	8.2	22/19	15.2-15.5	50
PG11	5-10	18.6	10	24/22	18.6-18.9	50
PG13.5	6-12.5	20.4	10	27/24	20.4-20.7	50
PG16	8.5-14	22.5	10.8	30/27	22.5-22.8	50
PG19	8.5-14	24	11	30/27	24-24.3	50
PG21	12.5-18	28.3	12	36/33	28.3-28.6	50
PG25	14-20	30	13	36/37	30-30.3	50
PG29	17-25	37	12	46/41	37-37.3	20
PG36	24-32	47	14	57/52	47-47.3	10
PG42	30-41	54	15	64/62	54-54.3	10
PG48	35-45.5	59.3	18	70/65	59.3-59.6	10

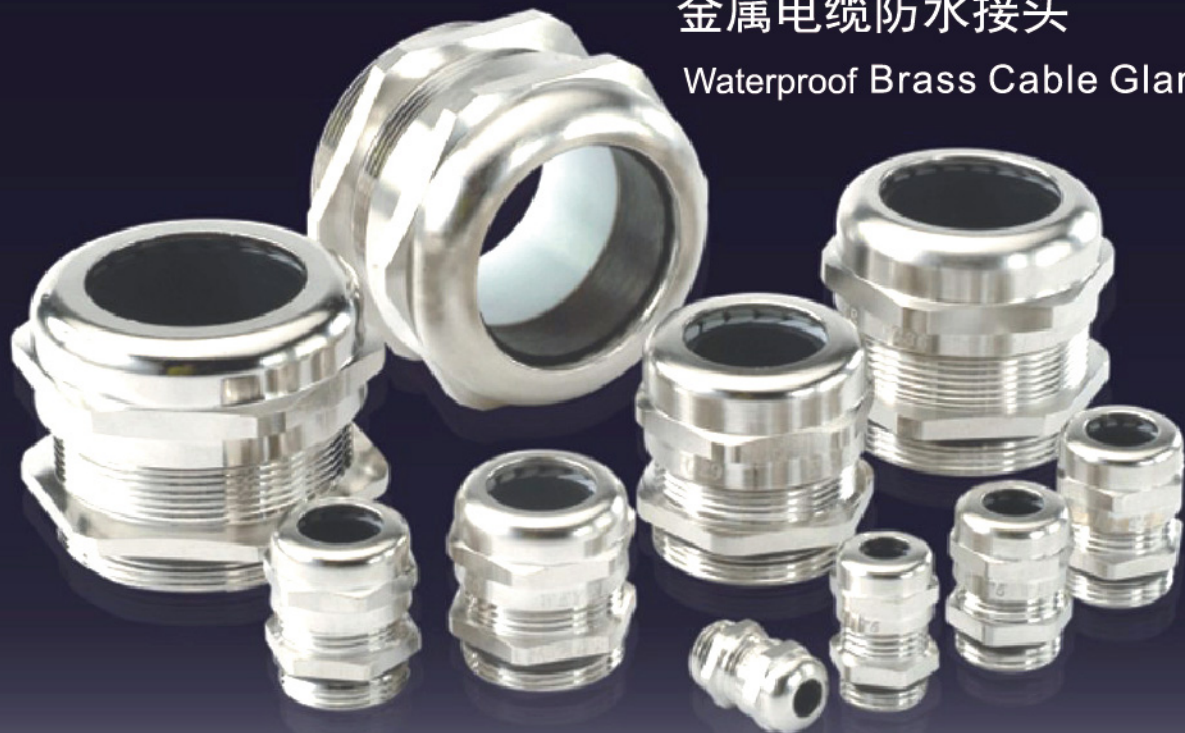金属电缆防水接头
Waterproof Brass Cable Gland

产品特征 Product characteristics




1. 螺牙规格：公制牙（Metric）、PG牙。
2. 产品材质：A.C.F部分采用铜镀镍制成；E部分以UL认可之尼龙PA66制成（防火等级UL94V-2）；B.D部分采用三元乙丙耐候橡胶制成。（可定制耐寒、耐高温橡胶；耐高酸碱、耐化学与抗腐蚀橡胶）。
3. 保护等级：IP68-10
4. 工作温度：静态-40℃至100℃，或瞬间可耐热至120℃（可定制-60℃至220℃）。
5. 产品特征：特殊夹紧爪与夹紧圈之设计，夹紧电缆范围大，抗拉力强，可防水、防尘、抗盐、耐酸碱、酒精、油、油脂及一般溶剂。

注：特殊规格需要请联系工厂

1. Thread: Metric, PG
2. Materials: Brass with nickel plated for A.C.F parts, UL approved Nylon PA66 (Flammability UL 94V-2) for E parts, EPDM rubber for B.D parts. (Accept to make super rubber: resist high temperature rubber, resist strong acid/alkali, etc).
3. Protection degree: IP68-10Bar
4. Working temperature: -40℃ to 100℃ in static state, or instantaneous heat resistance up to 120℃.
5. Features: The claws and seals of excellent design, sealing nut have a "click" sound and reopen, can hold cable firmly and have a wider cable range. resistant to salt water, weak acid, alcohol, oil, grease and common solvency.

Note: Special size and type, please contact us.



金属电缆防水接头 Waterproof Brass Cable Gland

型号规格 Model and size

螺牙规格 Thread	电缆范围 Cable Range Φ (mm)	螺纹外径 Thread O.D. C1 (mm)	螺纹长度 Thread Length C2 (mm)	扳手径 Spanner Size A&F (mm)	开孔尺寸 Panel Mounting Hole (mm)	接合长度 Joint Length H (mm)
M8 × 1.0	2-5	8	5	12	8-8.3	16
M10 × 1.0	3-6.5	10	6.5	14	10-10.3	19
M12 × 1.5	3-6.5	12	6.5	14	12-12.3	19
M14 × 1.5	4-8	14	8	17	14-14.3	19
M16 × 1.5	4-8	16	8	18	16-16.3	20
M18 × 1.5	5-10	18	8	20	18-18.3	21
M20 × 1.5	6-12	20	8	22	20-20.3	22
M22 × 1.5	10-14	22	8	24	22-22.3	23
M24 × 1.5	10-14	24	9	24/27	24-24.3	25
M25 × 1.5	10-14	25	9	24/27	25-25.3	25
M27 × 1.5	13-18	25	9	30/27	25-25.3	27
M27 × 1.5	13-18	27	9	30	27-27.3	27
M28 × 1.5	13-18	28	9	30	28-28.3	27
M30 × 1.5	13-18	30	9	30/32	30-30.3	29
M32 × 1.5	15-22	32	10	35	32-32.3	29
M33 × 1.5	15-22	33	10	35	33-33.3	29
M36 × 1.5	18-25	36	10	40	36-36.3	31
M37 × 1.5	18-25	37	10	40	37-37.3	31
M40 × 1.5	18-25	40	11	40/45	40-40.3	31
M42 × 1.5	22-30	40	11	45	40-40.3	35
M42 × 1.5	22-30	42	11	45	42-42.3	35
M47 × 1.5	25-33	47	11	50	47-47.3	37
M48 × 1.5	25-33	48	11	50/52	48-48.3	37
M50 × 1.5	32-38	50	13	57/55	50-50.3	37
M54 × 1.5	32-38	54	13	57	54-54.3	38
M60 × 1.5	37-44	60	14	64	60-60.3	38
M63 × 1.5	37-44	63	14	64/68	63-63.3	38
M64 × 1.5	37-44	64	14	64/68	64-64.3	38
M72 × 1.5	42-52	72	16	78	72-72.3	42
M75 × 1.5	42-52	75	16	78/80	75-75.3	42
M80 × 1.5	55-62	80	18	88	80-80.3	45
M88 × 1.5	65-70	88	18	94	88-88.3	45
M100 × 1.5	78-84	100	20	110	100-100.3	53



型号规格 Model and size

螺牙规格 Thread	电缆范围 Cable Range Φ (mm)	螺纹外径 Thread O.D. C1 (mm)	螺纹长度 Thread Length C2 (mm)	扳手径 Spanner Size A&F (mm)	开孔尺寸 Panel Mounting Hole (mm)	接合长度 Joint Length H (mm)
PG7	3-6.5	12.5	7	14/15	12.5-12.8	19
PG9	4-8	15.2	8	17/18	15.2-15.5	20
PG11	5-10	18.6	8	20/21	18.6-18.9	21
PG13.5	6-12	20.4	8	22/23	20.4-20.7	22
PG16	10-14	22.5	9	24/25	22.5-22.8	23
PG19	10-14	25	9	24/27	25-25.3	25
PG21	13-18	28.3	9	30	28.3-28.6	27
PG25	15-22	32	10	35	30-30.3	29
PG29	18-25	37	11	40	37-37.3	31
PG36	25-33	47	11	50	47-47.3	37
PG42	32-38	54	13	57	54-54.3	38
PG48	37-44	59.3	14	64	59.3-59.6	38
PG63	42-52	72	16	78	72-72.3	42

MDST Modular kit for boxes

导轨机箱



MODEL	No. of breakers	DOOR H	DOOR W	MODEL	No. of breakers	DOOR H	DOOR W
MDST43	2rows×10P	400	300	MDST75R	4rows×21P	700	500
MDST53	3rows×15P	500	400	MDST86	3rows×26P	800	600
MDST64	4rows×15P	600	400	MDST86R	4rows×26P	800	600
MDST66	3rows×26P	600	600	MDST106	6rows×26P	1000	600
MDST75	3rows×21P	700	500	MDST108	6rows×38P	1000	800



TL-G series - with gland hole

TL接线盒不带电缆盖板

材料：1.2mm冷轧钢;表面处理：热固粉末涂层 波纹饰面; 颜色：RAL 7032 RAL 7035
防护等级：IP66; IK抗冲击防护:10



Model	W H D	Model	W H D
TL301512-G	300×150×120	TL503012-G	500×300×120
TL302012-G	300×200×120	TL602012-G	600×200×120
TL303012-G	300×300×120	TL603012-G	600×300×120
TL402012-G	400×200×120	TL604012-G	600×400×120
TL404012-G	400×400×120	TL802012-G	800×200×120
TL502012-G	500×200×120	TL804012-G	800×400×120

TL series - No gland hole

TL接线盒带有电缆盖板

材料：1.2mm冷轧钢;表面处理：热固粉末涂层 波纹饰面; 颜色：RAL 7032 RAL 7035
防护等级：IP66; IK抗冲击防护:10



Model	W H D	Model	W H D	Model	W H D
TL15158	150×150×80	TL30208	300×200×80	TL502012	500×200×120
TL151512	150×150×120	TL302012	300×200×120	TL503012	500×300×120
TL201512	200×150×120	TL401512	400×150×120	TL602012	600×200×120
TL20208	200×200×80	TL40208	400×200×80	TL603012	600×300×120
TL30158	300×150×80	TL403012	400×300×120	TL802012	800×200×120
TL301512	300×150×120	TL404012	400×400×120	TL804012	800×400×120

TB series 180° hinges with lock

TB接线盒, 180°铰链+门锁安装

材料：1.2mm冷轧钢;表面处理：热固粉末涂层 波纹饰面; 颜色：RAL 7032 RAL 7035
防护等级：IP66; IK抗冲击防护:10




Model	W H D	Model	W H D
TB15158	150×150×80	TB203012	200×300×120
TB15308	150×300×80	TB204012	200×400×120
TB20208	200×200×80	TB205012	200×500×120
TB20308	200×300×80	TB303012	300×300×120
TB20408	200×400×80	TB304012	300×400×120
TB151512	150×150×120	TB3040155	300×400×155
TB153012	150×300×120	TB3060155	300×600×155
TB202012	200×200×120	TB3080155	300×800×155

TBS series hinges with cover

TBS接线盒, 180°铰链+盒盖由螺丝安装

材料：1.2mm冷轧钢;表面处理：热固粉末涂层 波纹饰面; 颜色：RAL 7032 RAL 7035
防护等级：IP66; IK抗冲击防护:10



Model	W H D	Model	W H D	Model	W H D
TBS15158	150×150×80	TBS151512	150×150×120	TBS205012	200×500×120
TBS15308	150×300×80	TBS153012	150×300×120	TBS303012	300×300×120
TBS20208	200×200×80	TBS202012	200×200×120	TBS304012	300×400×120
TBS20308	200×300×80	TBS203012	200×300×120	TBS3040155	300×400×155
TBS20408	200×400×80	TBS204012	200×400×120	TBS3060155	300×600×155

挂墙式机箱标准配置

标准配置： 封闭箱体;安装底板;锁;进线封板;密封圈及安装附件;
材 料： 冷轧钢 门：1.2mm,箱体, 1.2mm,底板：1.5mm;
高度大于800mm, 箱体和门均为1.5mm, 底板;2.0mm。
表面处理： 热固粉末涂层 波纹饰面
颜 色： RAL 7032 RAL 7035



工艺特点

- 1、安装嵌条，已开好装配孔的嵌条垂直焊接在箱门的两旁，使用M4自攻螺丝
- 2、密封圈，使用聚氨酯发泡密封胶能够很好的保证IP等级
- 3、门最大开启角度110°
- 4、槽型箱边，防止水和灰尘进入箱体内部。
- 5、挂墙孔，箱体背面已经开好安装孔。
- 6、（单门）门可以左右互换安装。
- 7、底部封板配有密封圈，保证IP等级。
- 8、安装板也可以根据您的要求使用桔黄色平光粉末涂层。

挂墙式机箱单门系列

Model	W H D	Model	W H D	Model	W H D
ST25 315	250×300×150	ST6 820	600×800×200	ST6 830	600×800×300
ST3 415	300×400×150	ST5 725	500×700×250	ST6 1030	600×1000×300
ST25 320	250×300×200	ST6 825	600×800×250	ST8 1030	800×1000×300
ST3 420	300×400×200	ST6 1025	600×1000×250	ST6 1230	600×1200×300
ST4 520	400×500×200	ST8 1025	800×1000×250	ST8 1230	800×1200×300
ST4 620	400×600×200	ST8 1225	800×1200×250	ST6 840	600×800×400
ST5 720	500×700×200	ST5 730	500×700×300	ST8 1240	800×1200×400

Single door



挂墙式机箱双门系列

Model	W H D	Model	W H D
STD8 620	800×600×200	STD12 1225	1200×1200×250
STD8 630	800×600×300	STD10 1230	1000×1200×300
STD10 620	1000×600×200	STD12 1240	1200×1200×400
STD12 630	1200×600×300	STD101430	1000×1400×300
STD10 1025	1000×1000×250	STD12 1430	1200×1400×300
STD10 1030	1000×1000×300	STD12 1440	1200×1400×400


Double door



挂墙式机箱带里门系列

Model	W H D	Model	W H D
STI3 420	300×400×200	STI5 620	500×600×200
STI4 420	400×400×200	STI5 720	500×700×200
STI3 520	300×500×250	STI6 820	600×800×200
STI4 520	400×500×200	STI3 425	300×400×250
STI5 520	500×500×200	STI4 525	400×500×250
STI4 620	400×600×200	STI4 625	400×600×250

Inner door



挂墙式机箱玻璃门系列

Model	W H D	Model	W H D
STP3 420	300×400×200	STP5 620	500×600×200
STP4 420	400×400×200	STP5 720	500×700×200
STP3 520	300×500×250	STP6 820	600×800×200
STP4 520	400×500×200	STP3 425	300×400×250
STP5 520	500×500×200	STP4 525	400×500×250
STP4 620	400×600×200	STP4 625	400×600×250

Plexiglass door



挂墙式机箱玻璃门带里门系列

Model	W H D	Model	W H D
STIP3 420	300×400×200	STIP6 825	600×800×250
STIP4 520	400×500×200	STIP8 1025	800×1000×250
STIP4 620	400×600×200	STIP4 630	400×600×300
STIP5 720	500×700×200	STIP5 730	500×700×300
STIP4 625	400×600×250	STIP6 830	600×800×300
STIP5 720	500×700×200	STIP6 1030	600×1000×300

Plexiglass door + Inner door



站式机柜概述

- 1.AR9柜架采用九折型材，前门厚度2.0mm，后门、侧门、顶盖、底框厚度1.5mm，型材厚度1.5mm，安装板厚度2.5mm；
- 2.AR8柜架采用四折型材，前门厚度2.0mm，整个箱体采用1.5mm，安装板厚度2.5mm；
- 3.单台AR9使用大概配置：安装板一块（镀锌板2.5mm），门上安装条2条（镀锌板1.2mm），前开门后背板（喷涂），深度导轨2条（1.5mm电镀白），塑料文件袋（A4纸），WA065吊环一套（4只）、安装板附件一套；
- 4.单台AR8使用大概配置：安装板一块（镀锌板2.5mm），门上安装条2条（镀锌板1.2mm），前开门后背板（喷涂），深度导轨2条（1.5mm电镀白），塑料文件袋（A4纸），吊环一套（4只，带塑料平垫）、安装板附件一套。
- 5.标准颜色RAL7032（出口型），如需其他颜色请特别说明，安装板未注明颜色全部按照标准镀锌板生产；6、锁标准配置MS821平面锁；
- 7.前门加强筋爆丝安装，其他部位无加强；
- 8.机柜里面灯、吊环、并柜件、门限位器、惯性滑轮、门上安装条、深度导轨、文件袋等无标配、需要请特别说明；



AR9000单门



AR9000双门



ARID 玻璃门带里门



ARPX 玻璃门机柜

AR9000单门

MODEL	W × H × D
AR9 146/4	600 X 1400X 400
AR9 146/6	600 X 1400X 600
AR9 146/8	600 X 1400X 800
AR9 148/4	800 X 1400X 400
AR9 148/6	800 X 1400X 600
AR9 148/8	800 X 1400X 800
AR9 166/6	600 X 1600X 600
AR9 166/8	600 X 1600X 800
AR9 168/6	800 X 1600X 600
AR9 168/8	800 X 1600X 800
AR9 186/4	600 X 1800X 400
AR9 186/5	600 X 1800X 500
AR9 186/6	600 X 1800X 600
AR9 186/8	600 X 1800X 800
AR9 188/4	800 X 1800X 400

MODEL	W × H × D
AR9 188/5	800 X 1800X 500
AR9 188/6	800 X 1800X 600
AR9 1810/4	1000X1800X 400
AR9 1810/5	1000X1800X 500
AR9 1810/6	1000X1800X 600
AR9 203/5	300 X 2000X 500
AR9 203/6	300 X 2000X 600
AR9 203/8	300 X 2000X 800
AR9 204/5	400 X 2000X 500
AR9 204/6	400 X 2000X 600
AR9 206/4	600 X 2000X 400
AR9 206/5	600 X 2000X 500
AR9 206/6	600 X 2000X 600
AR9 206/8	600 X 2000X 800

MODEL	W × H × D
AR9 208/4	800 X 2000X 400
AR9 208/5	800 X 2000X 500
AR9 208/6	800 X 2000X 600
AR9 208/8	800 X 2000X 800
AR9 2010/4	1000X 2000X 400
AR9 2010/5	1000X 2000X 500
AR9 2010/6	1000X 2000X 600
AR9 2010/8	1000X 2000X 800
AR9 2012/4	1200X 2000X 400
AR9 226/8	600 X 2200X 800
AR9 228/6	800 X 2200X 600
AR9 228/8	800 X 2200X 800
AR9 2210/6	1000X 2200X 600
AR9 2210/8	1000X 2200X 800

AR9000双门

MODEL	W × H × D
AR9 1810/4D	1000X1800X 400
AR9 1810/5D	1000X1800X 500
AR9 1810/6D	1000X1800X 600
AR9 1812/4D	1200X1800X 400
AR9 1812/5D	1200X1800X 500
AR9 1812/6D	1200X1800X 600

ARID 玻璃门带里门

MODEL	W	H
ARID 126	600	1200
ARID 128	800	1200
ARID 146	600	1400
ARID 148	800	1400
ARID 166	600	1600
ARID 168	800	1600
ARID 186	600	1800

MODEL	W	H
ARID 188	800	1800
ARID 1810	1000	1800
ARID 206	600	2000
ARID 208	800	2000
ARID 2010	1000	2000
ARID 226	600	2200
ARID 228	800	2200

MODEL	W	H
ARPX 126	600	1200
ARPX 128	800	1200
ARPX 146	600	1400
ARPX 148	800	1400
ARPX 166	600	1600
ARPX 168	800	1600
ARPX 186	600	1800

ARPX 玻璃门机柜

MODEL	W	H
ARPX 188	800	1800
ARPX 1810	1000	1800
ARPX 206	600	2000
ARPX 208	800	2000
ARPX 2010	1000	2000
ARPX 226	600	2200
ARPX 228	800	2200



AR8整体机柜

MODEL	W	H	D
AR8 1010/3D	1000	1000	300
AR8 128/3	800	1200	300
AR8 1210/3D	1000	1200	300
AR8 1212/4D	1200	1200	400
AR8 146/3	600	1400	300
AR8 146/4	600	1400	400
AR8 148/3	800	1400	300
AR8 148/4	800	1400	400
AR8 1410/4D	1000	1400	400
AR8 1412/4D	1200	1400	400
AR8 166/3	600	1600	300
AR8 166/4	600	1600	400
AR8 168/3	800	1600	300
AR8 168/4	800	1600	400
AR8 1610/3D	1000	1600	300
AR8 1610/4D	1000	1600	400
AR8 1612/3D	1200	1600	300
AR8 1612/4D	1200	1600	400
AR8 186/3	600	1800	300
AR8 186/4	600	1800	400
AR8 186/5	600	1800	500
AR8 186/6	600	1800	600
AR8 188/3	800	1800	300
AR8 188/4	800	1800	400

MODEL	W	H	D
AR8 188/5	800	1800	500
AR8 188/6	800	1800	600
AR8 1810/4D	1000	1800	400
AR8 1810/5D	1000	1800	500
AR8 1812/4D	1200	1800	400
AR8 1812/5D	1200	1800	500
AR8 1816/4D	1600	1800	400
AR8 1816/5D	1600	1800	500
AR8 206/3	600	2000	300
AR8 206/4	600	2000	400
AR8 206/5	600	2000	500
AR8 206/6	600	2000	600
AR8 208/3	800	2000	300
AR8 208/4	800	2000	400
AR8 208/5	800	2000	500
AR8 208/6	800	2000	600
AR8 2010/4D	1000	2000	400
AR8 2010/5D	1000	2000	500
AR8 2012/4D	1200	2000	400
AR8 2012/5D	1200	2000	500
AR8 2012/6D	1200	2000	600
AR8 2016/4D	1600	2000	400
AR8 2016/5D	1600	2000	500
AR8 2016/6D	1600	2000	600

AR6000控制台PLA 系列




MODEL	PE				LE				AE		
	H	I	J	K	D	E	F	G	A	B	C
ALP41	370	295	460	425	200	835	120	425	600	770	400
ALP42	370	295	460	425	200	835	120	425	800	770	400
ALP43	370	295	460	425	200	835	120	425	1000	770	400
ALP44	370	295	460	425	200	835	120	425	1200	770	400
ALP45	370	295	460	425	200	835	120	425	1600	770	400
ALP51	440	365	460	425	200	935	120	425	600	770	500
ALP52	440	365	460	425	200	935	120	425	800	770	500
ALP53	440	365	460	425	200	935	120	425	1000	770	500
ALP54	440	365	460	425	200	935	120	425	1200	770	500
ALP55	440	365	460	425	200	935	120	425	1600	770	500

AR6000控制台MA 系列




MODEL	ME				AE		
	L	M	N	D	A	B	C
AM41	650	612	123	252	600	770	400
AM42	650	612	123	252	800	770	400
AM43	650	612	123	252	1000	770	400
AM44	650	612	123	252	1200	770	400
AM45	650	612	123	252	1600	770	400
AM51	750	712	123	275	600	770	500
AM52	750	712	123	275	800	770	500
AM53	750	712	123	275	1000	770	500
AM54	750	712	123	275	1200	770	500
AM55	750	712	123	275	1600	770	500

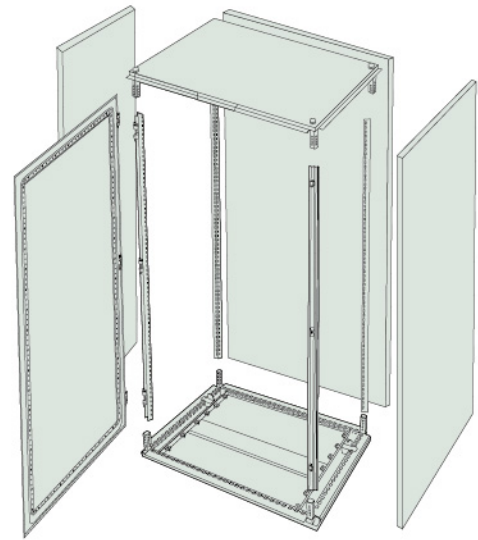

产品概述

- 1.立柱 (profiles) : 采用九折型材,型材厚度1.5mm,机柜的框架 ;
- 2.上下盖 (top cover and base) : 采用九折型材,型材厚度1.5mm , 机柜的上下盖。
- 3.前后门 (front door and black door) :采用九折型材,型材厚度2.0mm ;
- 4.安装底板 (mounting plate):采用2.5mm镀锌板;
- 5.侧门 (side panels):采用九折型材,型材厚度1.5mm;

颜色 : RAL7032 RAL7035

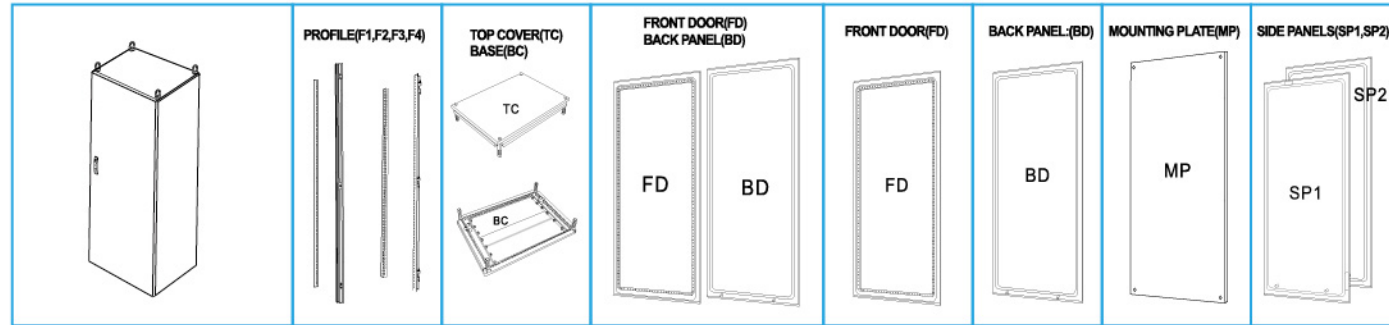


MODEL	SIZE(W H D)	PROFILES	TOP COVER+BASE	FRONT DOOR + BACK DOOR	FRONT DOOR	BACK DOOR	MOUNTING PLATE	SIDE PANELS
AR9 126/4K	600x1200x400	F12	TCB 64	FBD 126	FD 126	BD 126	MP 126	ARSP 124
AR9 126/8K	600x1200x800	F12	TCB 68	FBD 126	FD 126	BD 126	MP 126	ARSP 128
AR9 128/6K	800x1200x600	F12	TCB 86	FBD 128	FD 128	BD 128	MP 128	ARSP 126
AR9 146/4K	600x1400x400	F14	TCB 64	FBD 146	FD 146	BD 146	MP 146	ARSP 144
AR9 146/8K	600x1400x800	F14	TCB 68	FBD 146	FD 146	BD 146	MP 146	ARSP 148
AR9 148/6K	800x1400x600	F14	TCB 86	FBD 148	FD 148	BD 148	MP 148	ARSP 146
AR9 166/6K	600x1600x600	F16	TCB 66	FBD 166	FD 166	BD 166	MP 166	ARSP 166
AR9 168/6K	800x1600x600	F16	TCB 86	FBD 168	FD 168	BD 168	MP 168	ARSP 166
AR9 186/5K	600x1800x500	F18	TCB 65	FBD 186	FD 186	BD 186	MP 186	ARSP 185
AR9 186/8K	600x1800x800	F18	TCB 68	FBD 186	FD 186	BD 186	MP 186	ARSP 188
AR9 188/5K	800x1800x500	F18	TCB 85	FBD 188	FD 188	BD 188	MP 188	ARSP 185
AR9 1810/4K	1000x1800x400	F18	TCB 104	FBD 1810	FD 1810	BD 1810	MP 1810	ARSP 184
AR9 1810/6K	1000x1800x600	F18	TCB 106	FBD 1810	FD 1810	BD 1810	MP 1810	ARSP 186
AR9 203/6K	300x2000x600	F20	TCB 36	FBD 203	FD 203	BD 203	MP 203	ARSP 206
AR9 204/5K	400x2000x500	F20	TCB 45	FBD 204	FD 204	BD 204	MP 204	ARSP 205
AR9 206/4K	600x2000x400	F20	TCB 64	FBD 206	FD 206	BD 206	MP 206	ARSP 204
AR9 206/6K	600x2000x600	F20	TCB 66	FBD 206	FD 206	BD 206	MP 206	ARSP 206
AR9 208/4K	800x2000x400	F20	TCB 84	FBD 208	FD 208	BD 208	MP 208	ARSP 204
AR9 208/6K	800x2000x600	F20	TCB 86	FBD 208	FD 208	BD 208	MP 208	ARSP 206
AR9 2010/4K	1000x2000x400	F20	TCB 104	FBD 2010	FD 2010	BD 2010	MP 2010	ARSP 204
AR9 2010/6K	1000x2000x600	F20	TCB 106	FBD 2010	FD 2010	BD 2010	MP 2010	ARSP 206
AR9 226/6K	600x2200x600	F22	TCB 66	FBD 226	FD 226	BD 226	MP 226	ARSP 226
AR9 228/6K	800x2200x600	F22	TCB 86	FBD 228	FD 228	BD 228	MP 228	ARSP 226
AR9 2210/6K	1000x2200x600	F22	TCB 106	FBD 2210	FD 2210	BD 2210	MP 2210	ARSP 226

DOUBLE DOOR

AR9D 1810/4K	1000x1800x400	F18/D	TCB 104	FBD 1810	FD 1810	BD 1810	MP 1810	ARSP 184
AR9D 1810/6K	1000x1800x600	F18/D	TCB 106	FBD 1810	FD 1810	BD 1810	MP 1810	ARSP 186
AR9D 1812/5K	1200x1800x500	F18/D	TCB 125	FBD 1812	FD 1812	BD 1812	MP 1812	ARSP 185
AR9D 2010/5K	1000x2000x500	F20/D	TCB 105	FBD 2010	FD 2010	BD 2010	MP 2010	ARSP 205
AR9D 2010/8K	1000x2000x800	F20/D	TCB 108	FBD 2010	FD 2010	BD 2010	MP 2010	ARSP 208
AR9D 2012/5K	1200x2000x500	F20/D	TCB 125	FBD 2012	FD 2012	BD 2012	MP 2012	ARSP 205
AR9D 2012/8K	1200x2000x800	F20/D	TCB 128	FBD 2012	FD 2012	BD 2012	MP 2012	ARSP 208
AR9D 2210/8K	1000x2200x800	F22/D	TCB 108	FBD 2210	FD 2210	BD 2210	MP 2210	ARSP 228
AR9D 2212/8K	1200x2200x800	F22/D	TCB 128	FBD 2212	FD 2212	BD 2212	MP 2212	ARSP 228

STAINLESS STEEL ENCLOSURE

STX不锈钢机箱

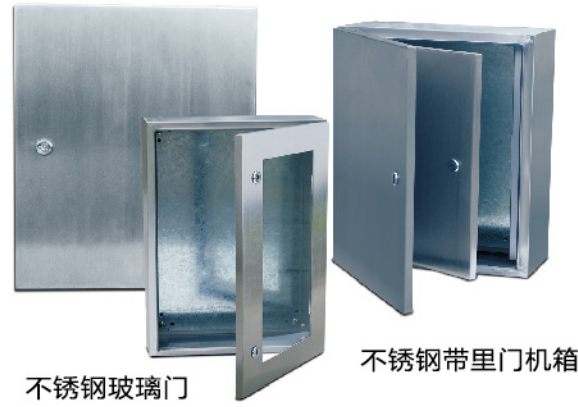

不锈钢玻璃门

不锈钢带里门机箱

所有机体均采用12/10AISI304L不锈钢材料制成
采用钢化玻璃 ;
供应范围 :
箱体 , 安装底板 , 进线封板及密封圈 , 锁及安装螺丝等。

STXP不锈钢机箱 STXI不锈钢机箱

MODEL	MODEL	W H D	No.of lock
STXP3 420	STXI3 420	300×400×200	1 OR 2
STXP4 520	STXI4 520	400×500×200	1 OR 2
STXP4 620	STXI4 620	400×600×200	1 OR 2
STXP5 725	STXI5 725	500×700×250	1 OR 2
STXP6 820	STXI6 820	600×800×200	1 OR 2
STXP6 825	STXI6 825	600×800×250	1 OR 2




IP66



Model	W H D	No.of lock
STX2-315	200×300×150	1
STX3-415	300×400×150	1
STX3-420	300×400×200	1
STX4-315	400×300×150	1
STX4-420	400×400×200	1
STX4-520	400×500×200	1
STX4-620	400×600×200	2
STX5-520	500×500×200	1
STX5-725	500×700×200	2
STX6-420	600×400×200	2

Model	W H D	No.of lock
STX6-620	600×600×200	2
STX6-625	600×600×250	2
STX6-630	600×600×300	2
STX6-820	600×800×200	2
STX6-825	600×800×250	2
STX6-830	600×800×300	2
STX6-1230	600×1200×300	2
STX8-830	800×800×300	2
STX8-1030	800×1000×300	2
STX8-1230	800×1200×300	2

Stainless Steel Terminal Box

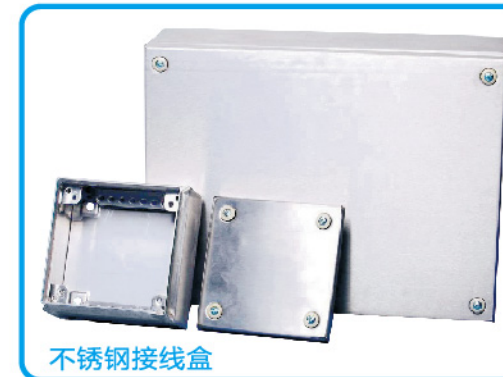

不锈钢接线盒

所有机体均采用12/10AISI304L不锈钢材料制成
(可定制AISI316L 不锈钢)
采用不锈钢螺丝安装盖子和箱体 ;
供应范围 :
箱体 , 盖子 , 铰链 , 及安装螺丝等。

PROTECTION RATINGS

- IP 66 complying with IEC EN62208; EN60529
- NEMA 4X
- impact resistance IK10 complying with IEC EN62208; EN50102.

Model	W H D
TLX15158	150×150×80
TLX151512	150×150×120
TLX201512	200×150×120
TLX20208	200×200×80
TLX30158	300×150×80
TLX301512	300×150×120

Model	W H D
TLX30208	300×200×80
TLX302012	300×200×120
TLX401512	400×150×120
TLX40208	400×200×80
TLX403012	400×300×120
TLX404012	400×400×120

Model	W H D
TLX502012	500×200×120
TLX503012	500×300×120
TLX602012	600×200×120
TLX603012	600×300×120
TLX802012	800×200×120
TLX804012	800×400×120

TLX安装地板



安装底板单独购买

MODEL	BOX DIMENSIONS		PLATE DIMENSIONS	
	W	H	W	H
SDPA-11	150	150	140	140
SDPA-22	200	200	176	170
SDPA-32	300	200	276	170
SDPA-33	300	300	276	270
SDPA-42	400	200	376	170

不锈钢落地式机柜结构特点：

骨架：15、10 AISI304L 不锈钢材料，骨架连接件由AISI304L 材料做成，激光焊接。仅用8颗高足不锈钢螺丝
门：20/10 AISI304L 材料（AISI316L材料可定做）带门加强筋
门铰链：锌合金材料，开门角度：180°（不锈钢材料铰链可以定做）



不锈钢AR9X 可拆卸机柜



不锈钢AR9XP带玻璃门机柜



不锈钢AR8X 整体式机柜

不锈钢AR9X 可拆卸机柜

Model	W	H	D	No.of lock	Model	W	H	D	No.of lock
AR9X186/4	600	1800	400	1	AR9X1810/5	1000	1800	500	1
AR9X186/5	600	1800	500	1	AR9X1810/6	1000	1800	600	1
AR9X206/5	600	2000	500	1	AR9X2010/5	1000	2000	500	1
AR9X206/6	600	2000	600	1	AR9X2010/6	1000	2000	600	1
AR9X188/4	800	1800	400	1	AR9X1812/4	1200	1800	400	1
AR9X188/5	800	1800	500	1	AR9X1812/5	1200	1800	500	1
AR9X208/5	800	2000	500	1	AR9X2012/5	1200	2000	500	1
AR9X208/6	800	2000	600	1	AR9X2012/6	1200	2000	600	1

不锈钢AR9XP带玻璃门机柜

Model	W	H	D	No.of lock	Model	W	H	D	No.of lock
AR9XP186/4	600	1800	400	1	AR9XP208/5	800	2000	500	1
AR9XP186/5	600	1800	500	1	AR9XP208/6	800	2000	600	1
AR9XP206/5	600	2000	500	1	AR9XP1810/5	1000	1800	500	1
AR9XP206/6	600	2000	600	1	AR9XP1810/6	1000	1800	600	1
AR9XP188/4	800	1800	400	1	AR9XP2010/5	1000	2000	500	1
AR9XP188/5	800	1800	500	1	AR9XP2010/6	1000	2000	600	1

不锈钢AR8X 整体式机柜

Model	W	H	D	No.of lock	Model	W	H	D	No.of lock
AR8X 1010/3	1000	1000	300	1	AR8X 188/8	800	1800	800	1
AR8X 128/3	800	1200	300	1	AR8X 1810/4	1000	1800	400	1
AR8X 146/4	600	1400	400	1	AR8X 1812/5D	1200	1800	500	2
AR8X 148/3	800	1400	300	1	AR8X 1816/4D	1600	1800	400	2
AR8X 148/4	800	1400	400	1	AR8X 206/4	600	2000	400	1
AR8X 166/4	600	1600	400	1	AR8X 206/5	600	2000	500	1
AR8X 168/3	800	1600	300	1	AR8X 208/4	800	2000	400	1
AR8X 1610/3	1000	1600	300	1	AR8X 208/6	800	2000	600	1
AR8X 186/3	600	1800	300	1	AR8X 2010/4	1000	2000	400	1
AR8X 186/5	600	1800	500	1	AR8X 2010/4D	1000	2000	400	2
AR8X 188/3	800	1800	300	1	AR8X 2012/6D	1200	2000	600	2
AR8X 188/4	800	1800	400	1	AR8X 2016/4D	1600	2000	400	2



Multiple door



Clamp board

			height	height 1	pcs/set
MTP602	MT602	600	200	195	2
MTP603	MT603		300	295	
MTP604	MT604		400	395	
MTP605	MT605		500	495	
MTP606	MT606		600	595	
MTP608	MT608		800	795	
MTP609	MT609	800	900	895	2
MTP6010	MT6010		1000	995	
MTP802	MT802		200	195	
MTP803	MT803		300	295	
MTP804	MT804		400	395	
MTP805	MT805		500	495	
MTP806	MT806		600	595	
MTP808	MT808		800	795	
MTP809	MT809		900	895	
MTP8010	MT8010		1000	995	

Manufactured from 1.5mm sheet steel complete with lock system and hinges
MT: without plexiglass door MTP: with plexiglass door

Clamp door


model	pcs/set	width
MT600	5	600mm
MT800	5	800mm

For multiple door in 1.5mm sheet steel with fixing accessories.

Seal cover

model	W×H	pcs/set
MT006	600×100mm	4
MT008	800×100mm	4

in 1.5mm sheet steel for sealing the top & bottom of cabinets, supply include 4 pcs seal cover&its accessories




Seal cover



Modular Cabinets

Rails for panels

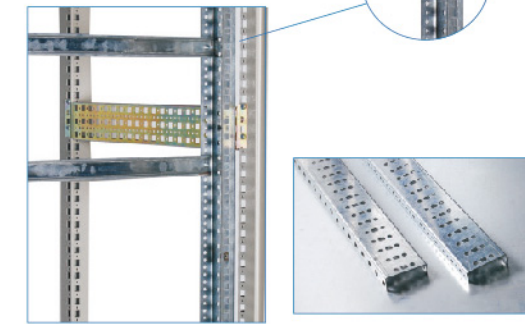

MODEL	For cabinet height
H1400	1400mm
H1600	1600mm
H1800	1800mm
H2000	2000mm
H2200	2200mm

Flat plate





Recessed plate



Blank front panel

Blank panels Supplied with fixing accessories(screws with captice bush) pack: 1 piece



CABINET WIDTH	PANEL A	PANEL B	MODEL
600	508	200	MDP602
		300	MDP603
		400	MDP604
		600	MDP606
800	708	200	MDP802
		300	MDP803
		400	MDP804
		600	MDP806



CABINET WIDTH	PANEL A	PANEL B	MODEL
600	508	400	MDP604F
		600	MDP606F
800	708	400	MDP804F
		600	MDP806F

PUNCHED FRONT PANELS



COMPONENT PANEL

Manufactured in 1.5mm sheet steel
MODTLAR: Supplied complete with DIN rail and fixing accessories (screws and captive bush)
FITTING: Supplied with hinge for left of right hand opening, closed with captive screws provided.
PACKAGING: Singly with accessories

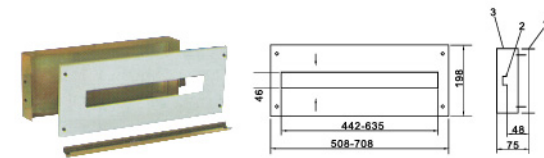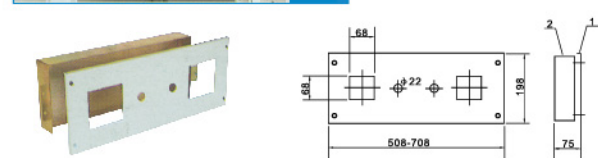

FLUSH PANEL

CABINET WIDTH	REF	DESCRIPTION	PCS	MODEL
600	1	PANEL	1	MDP03 102F
	2	COVER	1	MDP04 102
800	1	PANEL	1	MDP03 202F
	2	COVER	1	MDP04 202


PANEL FOR MODULAR COMPONENTS

CABINET WIDTH	REF	DESCRIPTION	PCS	MODEL
600	1	PANEL	1	MDP02 102F
	2	DIN RAIL	1	
	3	COVER	1	MDP04 102
800	1	PANEL	1	MDP02 202F
	2	DIN RAIL	1	
	3	COVER	1	MDP04 202



PANEL FOR MODULAR COMPONENTS

Manufactured in 1.5mm sheet steel.
Supplied complete with zinc passivate DIN rail and fixing accessories with screws and captive bush.
Package: singly

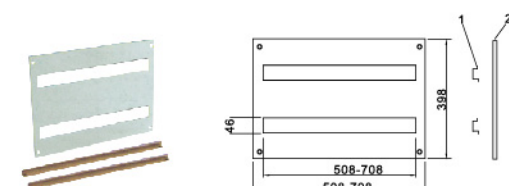


FLUSH PANEL

CABINET WIDTH	REF	DESCRIPTION	PCS	MODEL
600	PANEL 1×25P			
	1	PANEL	1	MDP02 102F
	2	DIN RAIL	1	
800	PANEL 1×36P			
	1	PANEL	1	MDP02 202F
	2	DIN RAIL	1	

FLUSH PANEL

CABINET WIDTH	REF	DESCRIPTION	PCS	MODEL
600	PANEL 2×25P			
	1	PANEL	1	MDP02 104F
	2	DIN RAIL	1	
800	PANEL 3×36P			
	1	PANEL	1	MDP02 204F
	2	DIN RAIL	1	

Compenonts pallet

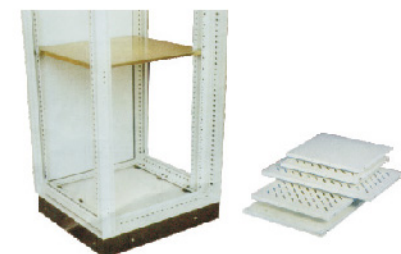

Two type: max carrying ability 50KG
max carrying ability 100KG
Material: manufactured from 1.5mm sheet steel with fixing accessories.

Max weight	W×D	50KG W/T holes	50KG W/O holes	100KG W/T holes
Cabinet width		Model	Model	Model
600	471×300	MPH 604	MPH 604N	MPH 604F
	471×400	MPH 605	MPH 605N	MPH 605F
	471×500	MPH 606	MPH 606N	MPH 606F
800	671×300	MPH 804		MPH 804F
	671×400	MPH 805		MPH 805F
	671×500	MPH 806		MPH 806F

(mm)

Rails for components pallet



MODEL	HEIGHT
H1400	1400mm
H1600	1600mm
H1800	1800mm
H2000	2000mm
H2200	2200mm

LOCK




Model: K1



Model: K2



Model: K3



Model: K4



Model: TL/PLM



Model: LK-5




Model: MS 738



Model: MS 820


ST系列挂墙钩




WA 065 吊环



WL02 安装卡扣



WS02 安装卡扣



接地线



型号	面积	长度	环直径
TJ-CM6130	6	130	6.4
TJ-CM6160	6	160	6.4
TJ-CM6168	6	160	8.3
TJ-CM1025	10	250	6.4
TJ-CM2535	25	350	8.3

防雨盖



Model	W (mm)	D (mm)
TT1 04	400	200
TT2 04	400	250
TT1 05	500	200
TT2 05	500	250
TT1 06	600	250
TT2 06	600	300
TT2 08	800	300

门支持 WA060




用于支撑门90°站立
2mm镀锌钢板制成

小型金属接线盒底板



1.5mm镀锌钢板制成
用于TL, TB等小型金属
接线盒

小型金属接线盒挂墙钩



四件一装
用于TL, TB等
小型金属接线盒


通风板

带有排风口的封板安装在箱体
用于通风散热
Color: RAL7035



ref.	L	W
GP-1	158	78
GP-2	208	89
GP-3	244	90
GP-4	359	129
GP-5	445	148
GP-6	259	79

挂墙式底板图

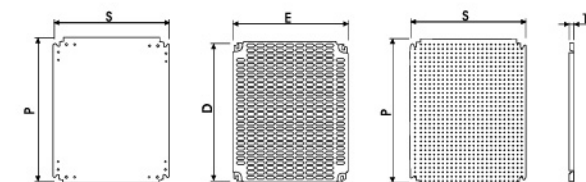

通用底板

方孔底板

圆孔底板

WI 300 并轨吊环



WA020并轨连接件



WA010并轨连接螺栓



130°铰链



侧板



Supply include: 2pcs side covers and fixing accessories. Manufactured from 1.5mm sheet steel. Paint finish: epoxy polyester powder coating.

model	ARSP 124	ARSP 128	ARSP 146	ARSP 166	ARSP 184	ARSP 186	ARSP 204	ARSP 206
height	1200	1200	1400	1600	1800	1800	2200	2200
depth	400	800	600	600	400	600	400	600

(mm)


插入式螺母



Special design ed nut use to install on AR9000 manufactured from zinc alloy

Insert nut	Pack/Bag	Model
M6	50	WA6
M8	50	WA8

冲孔导轨

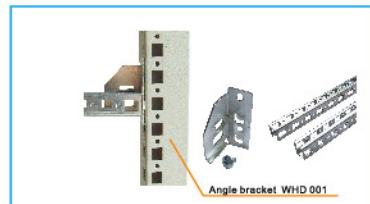

Model	WHD400	WHD600	WHD1000	WHD1600	WHD2000
leght	295	495	895	1495	1895
W H D	400	600	1000	1600	2000
pcs/set	12	12	12	6	6


LOCK MS830



LOCK MS821



安装冲孔导轨




model	WD400	WD600	WW600	WW1000
	For Depth of cabinet		For width of cabinet	
dimension	400	600	600	1000
pcs/set	4	4	4	4

With 5rows of universal skeleton structions of partial assembly,with 8pcs fixing screws M5×13mm

部分底板


底座

由1.5MM钢板制成



Cabinet Width	WxH	pcs/set	model
600	492×333	2	MP 64
800	692×133	2	MP 82
800	692×533	2	MP 86
1000	892×333	2	MP 104
1000	892×533	2	MP 106
1200	1092×133	2	MP 122
1200	1092×333	2	MP 124
1200	1092×533	2	MP 126

由2MM钢板制成 颜色: RAL6022



Model H100	PL1 45	PL1 46	PL1 65	PL1 68	PL1 85
Model H200	PL2 45	PL2 46	PL2 65	PL2 68	PL2 85
Cabinet width dimension depth	400	400	600	600	800
Model H100	PL1 86	PL1 104	PL1 106	PL1 124	PL1 126
Model H200	PL2 86	PL2 104	PL2 106	PL2 124	PL2 126
Cabinet width dimension depth	800	1000	400	1200	1200
	600	400	600	400	600

塑料A4文件袋

钢板布线方案图框



Model:PP100
Mater:ABS



Fixing on the door frame. Color: RAL 2000

model		PP400	PP500	PP600	PP800	PP900	PP1000
dimension	W	255	355	455	655	755	855
	H	260	260	260	260	260	260
	D	90	90	90	90	90	90
(mm)							

设备展示 Equipment display

