


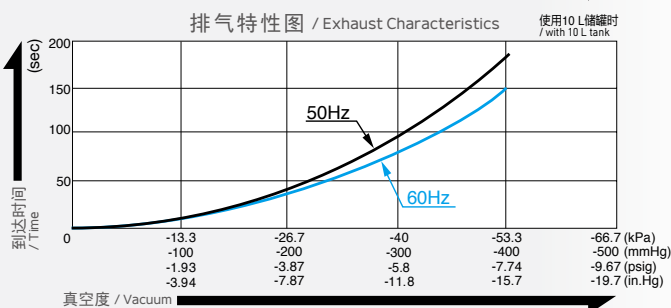


真空泵 / Vacuum Pump

型式 VP0140

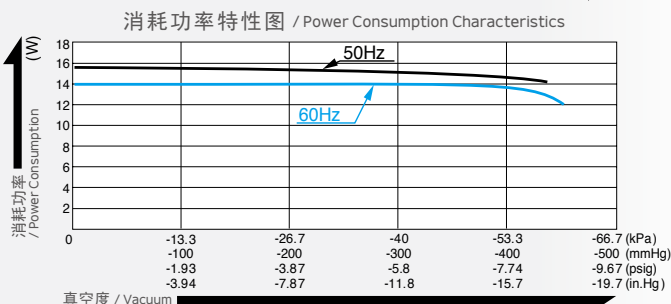

空气量和消耗功率 / Airflow & Electric Current

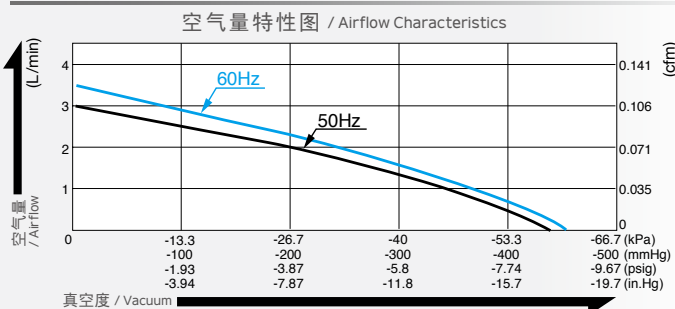

※ 特性图只是参考值，并不是保证值。
/The characteristic charts are for reference only and are not guaranteed.

规格 / Specifications

达到真空度* / Attainable Vacuum	-53.3 kPa (-400 mmHg) -533 mbar -15.7 in. Hg		
吐出空气量 / Free Air Displacement	3 L/min 0.106 cfm		
额定电压 / Rated Voltage	100 V AC	115 V AC	230 V AC
消耗功率 / Power Consumption	15 W / 14 W	14 W	15 W
额定频率 / Rated Frequency	50 Hz / 60 Hz	60 Hz	50 Hz
耐用时间 (MTTF) / Rated Performance (MTTF)	5,000 小时 / hours		
吸入口尺寸 / Inlet	φ6 mm (外径) 软管接头 / 6mm O.D. hose barb		
吐出口尺寸 / Outlet	φ6 mm (外径) 软管接头 / 6mm O.D. hose barb		
额定时间 / Duty Cycle	60 分钟		
线圈绝缘等级 / Coil Insulation Class	相当于 E 类, UL 规格品: 相当于 B 类 / E or its equivalent and B for UL		
安装尺寸 / Mounting Dimensions	48 (L) x 62 (W) mm 1-57/64" (L) x 2-7/16" (W)		
本体重量 / Weight	0.7 kg 1.54 Lbs		
导线长度 / Leadwire Length	200 mm 7-7/8"		


※ 高于 -53.5kPa 运转时需要在进气管路上加装一个放气阀或泄压阀。
/ Operations at higher than -53.5kPa need an additional leak valve or relief valve on the inlet piping.

用途例 / Application Examples

滴落式装置 / Dripping Machine



小型印刷机 / Paper Card Dispenser



外形及安装尺寸图 / Dimensional Outline Drawing (单位 / Unit : mm)

