

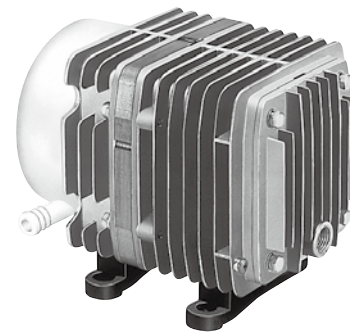
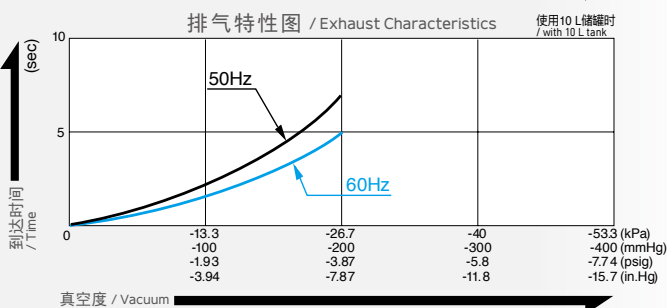


# 真空泵 / Vacuum Pump

## 型式 VP0625

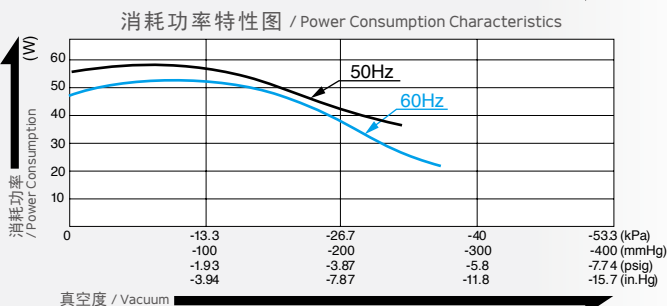

### 空气量和消耗功率 / Airflow & Electric Current

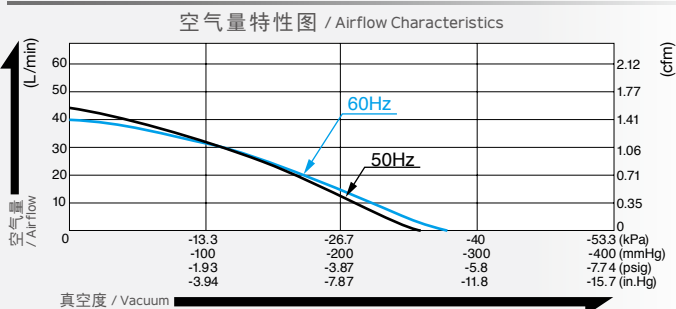


\* 特性图只是参考值, 并不是保证值。  
/The characteristic charts are for reference only and are not guaranteed.

### 规格 / Specifications


达到真空度 / Attainable Vacuum	-33.3 kPa (-250 mmHg) -333 mbar -9.84 in. Hg		
吐出空气量 / Free Air Displacement	40 L/min 1.41 cfm		
额定电压 / Rated Voltage	100 V AC	115 V AC	230 V AC
消耗功率 / Power Consumption	60 W		
额定频率 / Rated Frequency	50 Hz / 60 Hz	60 Hz	50 Hz
耐用时间 / Rated Performance	10,000 小时 / hours		
吸入口尺寸 / Inlet	φ15 mm (外径) 软管接头 / 6mm O.D. hose barb		
吐出口尺寸 / Outlet	ISO Rc 1/4 (内螺纹) / internal thread )		
额定时间 / Duty Cycle	连续 / Continuous		
线圈绝缘等级 / Coil Insulation Class	相当于 E 类, UL 规格品: 相当于 B 类 / E or its equivalent and B for UL		
安装尺寸 / Mounting Dimensions	68 (L) x 84 (W) mm 2-43/64" (L) x 3-5/16" (W)		
本体重量 / Weight	3 kg 6.6 Lbs		
导线长度 / Leadwire Length	235 mm 9-1/4"	235 mm 9-1/4"	320 mm 12-19/32"

### 用途例 / Application Examples

胶片洗印设备 / Microfiche Camera



聚光装置 / Solar Collection Screen



### 外形及安装尺寸图 / Dimensional Outline Drawing (单位 / Unit : mm)

