

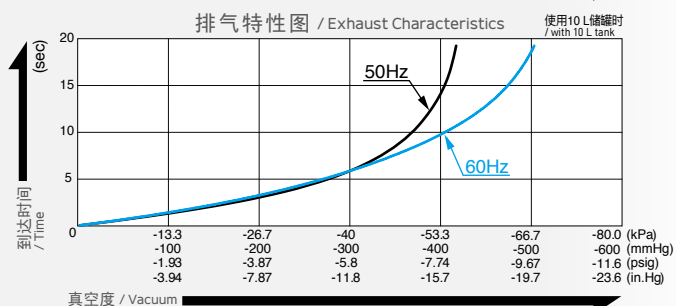


真空泵 / Vacuum Pump

型式 VP0940

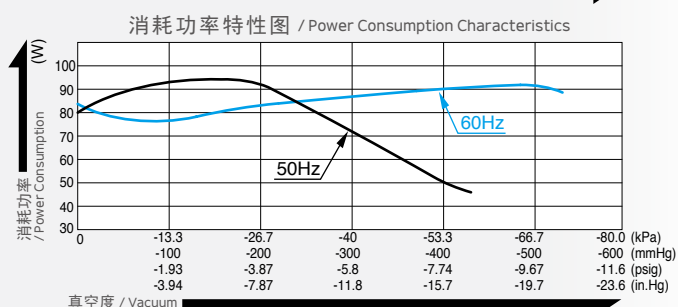




空气量和消耗功率 / Airflow & Electric Current

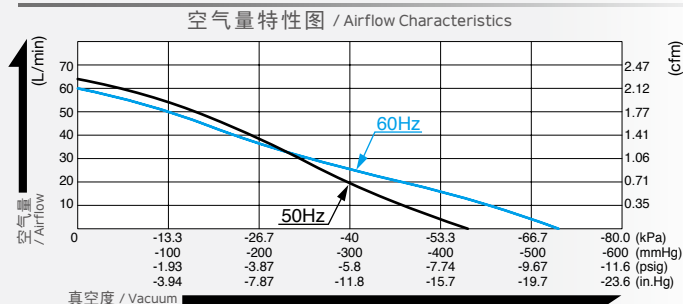

※ 特性图只是参考值，并不是保证值。

/The characteristic charts are for reference only and are not guaranteed.

外形及安装尺寸图 / Dimensional Outline Drawing (单位 / Unit : mm)

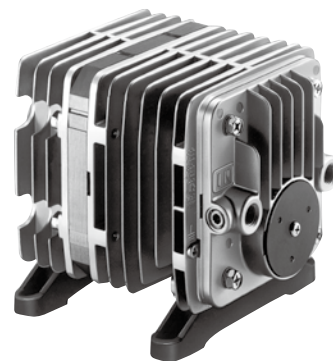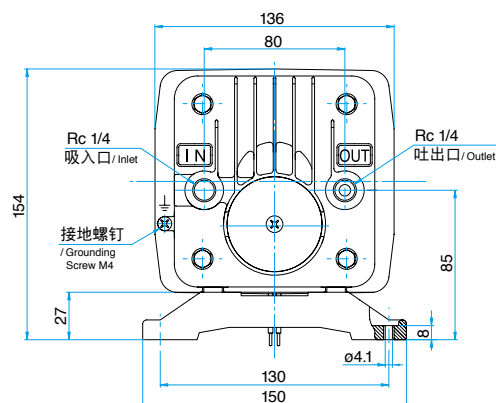

规格 / Specifications

达到真空度* / Attainable Vacuum	-53.3 kPa (-400 mmHg) -533 mbar -15.7 in. Hg		
吐出空气量 / Free Air Displacement	60 L/min 2.12 cfm		
额定电压 / Rated Voltage	100 V AC	115 V AC	230 V AC
消耗功率 / Power Consumption	95 W		
额定频率 / Rated Frequency	50 Hz / 60 Hz	60 Hz	50 Hz
耐用时间 / Rated Performance	10,000 小时 / hours		
吸入口尺寸 / Inlet	ISO Rc 1/4 (内螺纹 / internal thread)		
吐出口尺寸 / Outlet	ISO Rc 1/4 (内螺纹 / internal thread)		
额定时间 / Duty Cycle	连续 / Continuous		
线圈绝缘等级 / Coil Insulation Class	相当于 B 类 / UL 规格品 / B or its equivalent / UL		
安装尺寸 / Mounting Dimensions	102 (L) x 130 (W) mm 4-1/64" (L) x 5-1/8" (W)		
本体重量 / Weight	4.55 kg 10.0 Lbs		
导线长度 / Leadwire Length	300 mm 11-13/16"	300 mm 11-13/16"	320 mm 12-19/32"

※ 高于 -53.5kPa 运转时需要在进气管路上加装一个放气阀或泄压阀。

/ Operations at higher than -53.5kPa need an additional leak valve or relief valve on the inlet piping.

用途例 / Application Examples

贴标机 / Label Sticking Machine

