



# 真空泵 / Vacuum Pump

## 型式 VP0645

定制 / is made to order

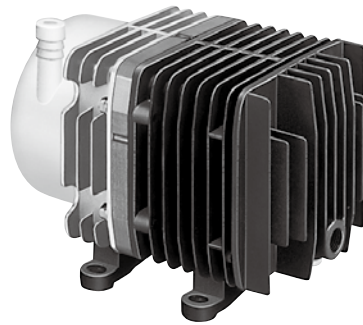

### 空气量和消耗功率 / Airflow & Electric Current

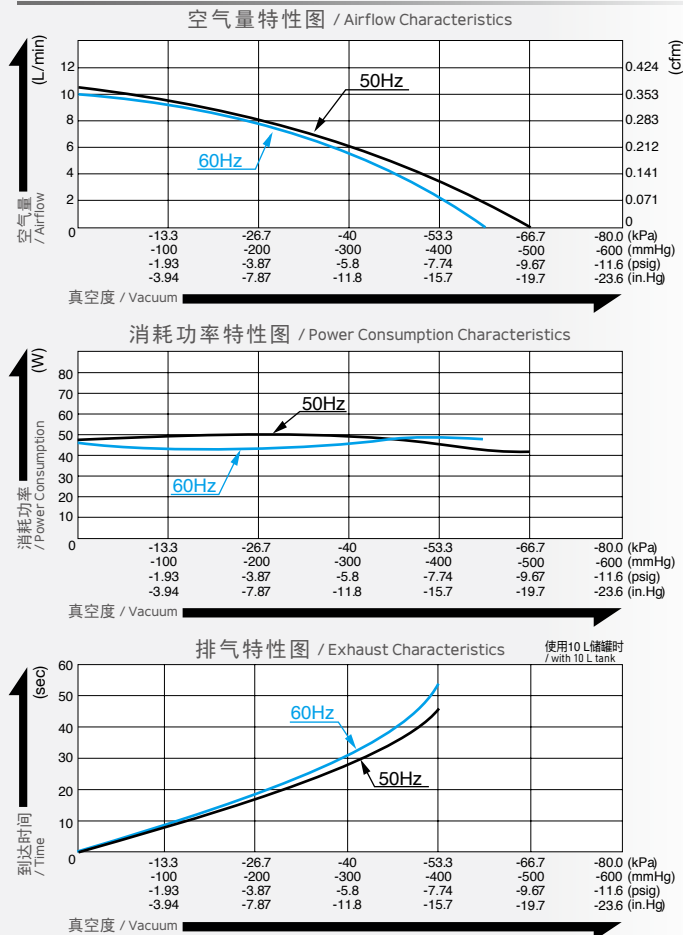

\* 特性图只是参考值, 并不是保证值。

/The characteristic charts are for reference only and are not guaranteed.

### 规格 / Specifications


|                                   |                                                  |                  |                  |
|-----------------------------------|--------------------------------------------------|------------------|------------------|
| 达到真空度*<br>/ Attainable Vacuum     | -60 kPa (-450 mmHg)<br>-600 mbar -17.7 in. Hg    |                  |                  |
| 吐出空气量<br>/ Free Air Displacement  | 10 L/min<br>0.35 cfm                             |                  |                  |
| 额定电压 / Rated Voltage              | 100 V AC                                         | 115 V AC         | 230 V AC         |
| 消耗功率 / Power Consumption          | 50 W / 48 W                                      | 48 W             | 50 W             |
| 额定频率 / Rated Frequency            | 50 Hz / 60 Hz                                    | 60 Hz            | 50 Hz            |
| 耐用时间<br>/ Rated Performance       | 3,000 小时 / hours                                 |                  |                  |
| 吸入口尺寸 / Inlet                     | φ15 mm (外径) 软管接头 / 15 mm O.D. hose barb          |                  |                  |
| 吐出口尺寸 / Outlet                    | ISO Rc 1/4 (内螺纹) / internal thread               |                  |                  |
| 额定时间 / Duty Cycle                 | 连续 / Continuous                                  |                  |                  |
| 线圈绝缘等级<br>/ Coil Insulation Class | 相当于 E 类<br>/ E or its equivalent                 |                  |                  |
| 安装尺寸<br>/ Mounting Dimensions     | 68 (L) x 84 (W) mm<br>2-43/64" (L) x 3-5/16" (W) |                  |                  |
| 本体重量 / Weight                     | 3.2 kg 7.1 Lbs                                   |                  |                  |
| 导线长度<br>/ Leadwire Length         | 200 mm<br>7-7/8"                                 | 200 mm<br>7-7/8" | 200 mm<br>7-7/8" |

\* 高于 -60kPa 运转时需要在进气管路上加装一个放气阀或泄压阀。


/ Operations at higher than -60kPa need an additional leak valve or relief valve on the inlet piping.

### 用途例 / Application Examples

#### 用途例 (VP0645)

液体净化  
/ Liquid Purification

#### 用途例 (VP0945)

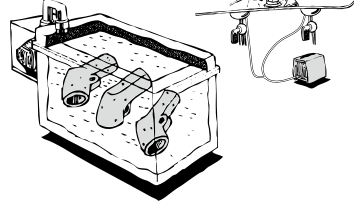真空吸附台钳  
/ Vacuum Vice浸渍减压器  
/ Impregnation Depressurizer

### 外形及安装尺寸图 / Dimensional Outline Drawing (单位 / Unit : mm)

