北京 15601379173(微信)

13943752599 (长沙)



上海 18924626834 微信18926488741深圳

KN 19, 1关 + 1开, 9^{±3} N, 1 常闭 + 1 常开

主要应用领域



- > 测量-控制-校准
- > 机械制造
- > 电子医学
- > 房屋安装

特性

- ➤ 银触点用于安全切换开关(250 V / 6 A)
- > 装在封闭的覆膜/按键罩下面
- ▶ 选型: 带1个LED灯的点发光
- > 安装高度: 9.7 mm
- >焊接技术: THT



描述

KN 19可提供把网络开关(250 V / 6 A)直接装入扁平输入系统。这样设备上没有额外开关,因此无需在覆膜中另加开口。可使设备达到最佳安全性,并且设计贯通一体。接触口的宽度符合VDE准则。KN 19也可装在按键罩RK 90的下面。

技术参数

手焊焊接温度

> 一般

工作温度,最低 -25 °C

存储温度,最低 -40 °C 工作温度,最高 70 °C

 五年過度,取尚
 70 ℃

 存储温度,最高
 70 ℃

 可发光
 是

 发光元件
 LED

 手工焊接时间,最长
 3 sec

焊接技术 遵照DIN EN 61760-1进行波焊

350 °C

 包装
 滑轨

 包装数量
 12 碎片

使用寿命 100,000 (6A / 250V AC) 次

50,000 (10A / 50V DC) 次

B10 电的 130.000 (6A / 250V AC) 次

65.000 (10A / 50V DC) 次

正面保护方式遵照DIN EN 60529 IP40

 MOQ 秩序
 12 碎片

 RoHS 一致性
 是

 REACH 一致性
 是

> 安装尺寸

安装高度 9.7 毫米

矩阵安装间距,最少 19.05 x 38.1 毫米

外径尺寸37.8 毫米外径尺寸18.8 毫米正面高度9.7 毫米

> 机械特性

数: 1/4

直接链接

> RAFI eCatalog

The information in this data sheet only contains general descriptions and / or performance features, which may not apply precisely as described to the respective application, and which my change due to further product enhancements. The technical data, illustrations and other information about our products are the mere results of individual technical testing. These descriptions and other product features are only binding if they expressly agreed upon at the time of the conclusion of a binding contract. In all other cases, we reserve the right to make technical changes as well as changes of availability. Pictures and other graphic illustrations are approximations only. All product names may be trademarks or brand names of the RAFI Group or any other sub-supplier of RAFI. The use of such by any third parties for their own purposes may infringe the rights of the respective entity holding those rights.

4006-022-002

RAFI GmbH & Co. KG

Ravensburger Str. 128-134 88276 Berg / Ravensburg Germany www.rafi-group.com, info.headquarters@rafi-group.com

shunto@126.com



北京 15601379173(微信) 13943752599 (长沙) 上海 18924626834 微信18926488741深圳

操作功能自复位功能操作力,最大100 N操作力,最小9±3 N

行程0,55±0,15 毫米触点功能1 常闭 + 1 常开触点系统桥接-跳跃式触点

触点材料银触回跳时间10 ms固定焊接背面端子THT可焊接性是

> 电气特性

额定电压,最小12.000 V额定电压,最大250 V额定电流,最小0.1 A额定电流,最大6.000 A额定功率,最大 DC250 Watt

The information in this data sheet only contains general descriptions and / or performance features, which may not apply precisely as described to the respective application, and which my change due to further product enhancements. The technical data, illustrations and other information about our products are the mere results of individual technical testing. These descriptions and other product features are only binding if they expressly agreed upon at the time of the conclusion of a binding contract. In all other cases, we reserve the right to make technical changes as well as changes of availability. Pictures and other graphic illustrations are approximations only. All product names may be trademarks or brand names of the RAFI Group or any other sub-supplier of RAFI. The use of such by any third parties for their own purposes may infringe the rights of the respective entity holding those rights.

4006-022-002

数: 2/4


北京 15601379173(微信)


13943752599 (长沙)

上海 18924626834 微信18926488741深圳


图纸

尺寸图

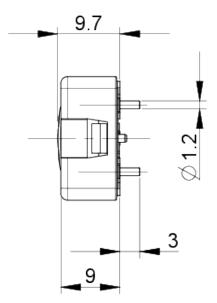

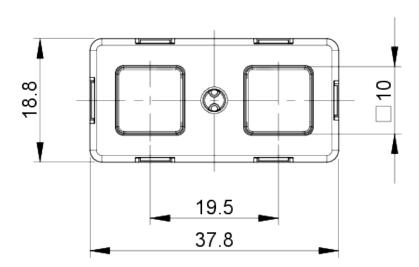

PCB示意图

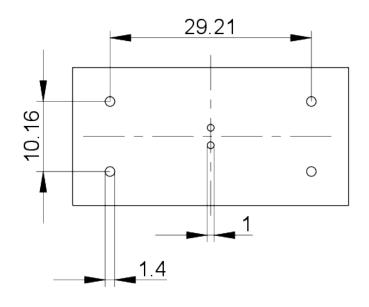


RAFI GmbH & Co. KG

北京 15601379173(微信) 13943752599 (长沙) 上海 18924626834 微信18926488741深圳



原理图



1 常図 + 1 常开

RAFI GmbH & Co. KG