

30V N-Channel Enhancement Mode MOSFET

Description

The CP70S03D6 uses SGT technology that is uniquely optimized to provide the most efficient high frequency switching performance. Both conduction and switching power losses are minimized due to an extremely low combination of $R_{DS(ON)}$ and Q_g . This device is ideal for high-frequency switching and synchronous rectification.


General Features

- ◆ $V_{DS} = 30V$, $I_D = 70A$
 $R_{DS(ON)}(Typ.) = 4.4m\Omega$ @ $V_{GS} = 10V$
 $R_{DS(ON)}(Typ.) = 6.5m\Omega$ @ $V_{GS} = 4.5V$
- ◆ Very low on-resistance $R_{DS(on)}$
- ◆ 150 °C operating temperature
- ◆ 100% UIS tested

Application


- ◆ Synchronous Rectification in DC/DC Converters
- ◆ Industrial and Motor Drive applications

Schematic diagram




Marking and pin assignment

PDFN5*6-8L-A



Top View



Bottom View

XXXXX—Wafer Information

YYYYY—Quality Code

Ordering Information

Part Number	Storage Temperature	Package	Devices Per Reel
CP70S03D6-G	-55°C to +150°C	PDFN5*6-8L-A	5000

Absolute Maximum Ratings (TA=25°C unless otherwise noted)

parameter		symbol	limit	unit
Drain-source voltage		V_{DS}	30	V
Gate-source voltage		V_{GS}	±20	V
Continuous Drain Current	TC=25°C	I_D	70	A
	TC=70°C		46	
Avalanche energy ($T_J = 25^\circ C$, $V_{DD} = 30V$, $V_G = 10V$, $L = 0.5mH$, $R_g = 25\Omega$)		E_{AS}	23	mJ
Power Dissipation	TC=25°C	P_D	30	W
	TC=70°C		15	
Operating junction Temperature range		T_J	-55—150	°C

Electrical Characteristics (TA=25°C unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Static Characteristics						
Drain-source breakdown voltage	BV _{DSS}	V _{GS} =0V, I _D =250μA	30	-	-	V
Zero gate voltage drain current	I _{DSS}	V _{DS} =30V, V _{GS} =0V	-	-	1	μA
		T _J =85°C	-	-	5	
Gate Leakage Current	I _{GSS}	V _{DS} =0V, V _{GS} =±20V	-	-	±100	nA
Gate threshold voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250μA	1.0	1.8	2.5	V
Drain-source on-state resistance	R _{DS(ON)}	V _{GS} =10V, I _D =20A	-	4.4	5.5	mΩ
		V _{GS} =4.5V, I _D =20A	-	6.5	8.5	
Forward Transconductance	g _{FS}	V _{DS} =5V, I _D =20A	-	125	-	S
Diode Characteristics						
Diode Forward Voltage	V _{SD}	I _{SD} =1A, V _{GS} =0V	-	0.7	1.2	V
Diode Continuous Forward Current	I _S		-	-	36	A
Reverse Recovery Time	t _{rr}	T _J = 25°C, I _F = I _S di/dt = 100A/μs	-	13	-	ns
Reverse Recovery Charge	Q _{rr}		-	22	-	nC
Dynamic Characteristics						
Gate Resistance	R _G	V _{GS} =0V, V _{DS} =0V, f=1MHz	-	0.9	-	Ω
Input capacitance	C _{ISS}	V _{GS} =0V , V _{DS} =15V f=1.0MHz	-	1074	-	pF
Output capacitance	C _{OSS}		-	444	-	
Reverse transfer capacitance	C _{RSS}		-	56	-	
Turn-on delay time	t _{D(ON)}	V _{GS} =10V, V _{DS} =15V, R _L =1.5Ω, R _G =3Ω	-	6.5	-	ns
Turn-on Rise time	t _r		-	2.5	-	
Turn-off delay time	t _{D(OFF)}		-	26	-	
Turn-off Fall time	t _f		-	3.5	-	
Total gate charge	Q _g	V _{GS} =10V, V _{DS} =15V, I _D =20A	-	20.61	-	nC
Gate-source charge	Q _{gs}		-	3.27	-	
Gate-drain charge	Q _{gd}			4.06	-	







Thermal Characteristics

Maximum Junction-to-Lead ^B	Steady-State	$R_{\theta JC}$	3.1	4	$^\circ C/W$
---------------------------------------	--------------	-----------------	-----	---	--------------

A: The value of $R_{\theta JA}$ is measured with the device mounted on 1in 2 FR-4 board with 2oz. Copper, in a still air environment with $T_A=25^\circ C$. The value in any given application depends on the user's specific board design. The current rating is based on the $t \leq 10s$ thermal resistance rating.

B: The $R_{\theta JA}$ is the sum of the thermal impedance from junction to lead $R_{\theta JL}$ and lead to ambient.

Typical Performance Characteristics

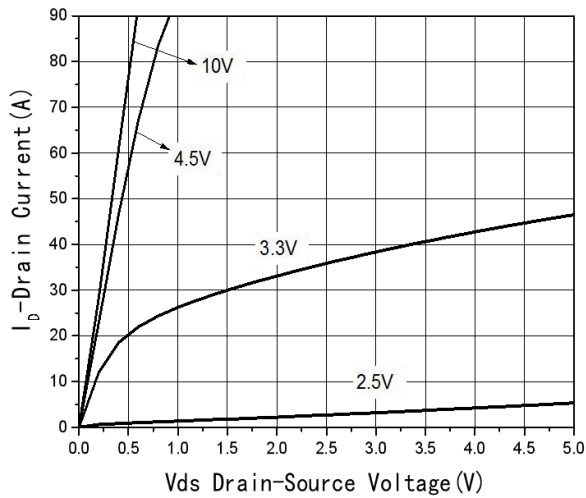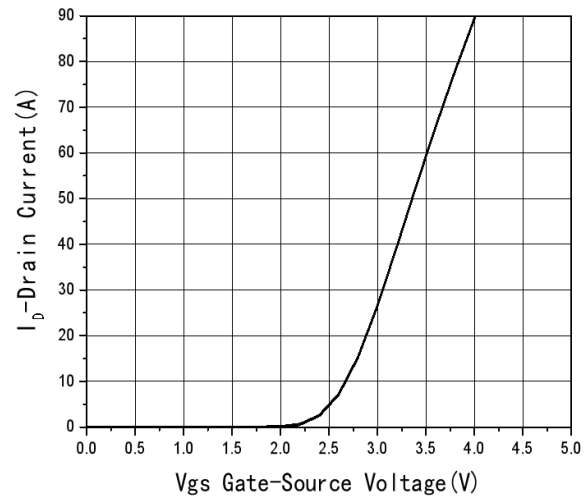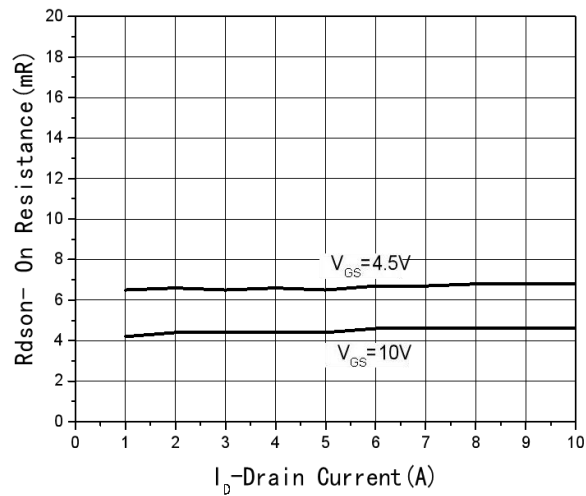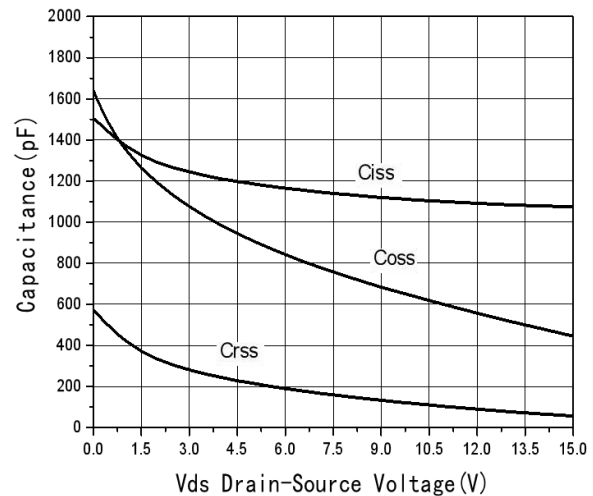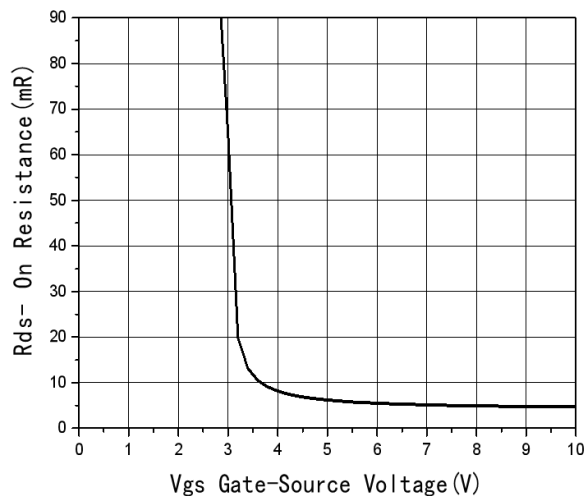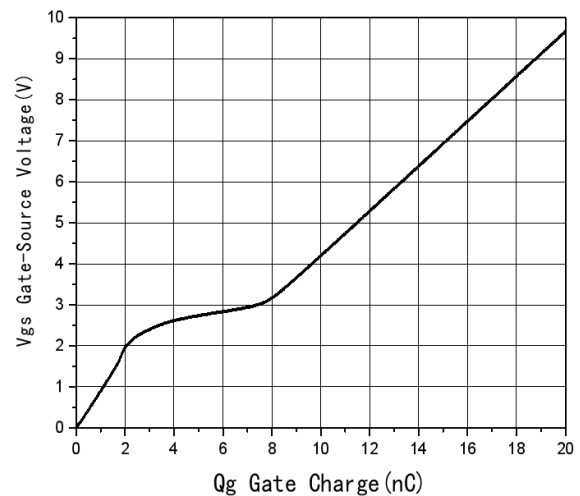
Fig1 Output Characteristics

Fig2 Transfer Characteristics

Fig3 Rdson-Drain current

Fig4 Capacitance vs V_DS

Fig5 Rdson-Gate Drain voltage

Fig6 Gate Charge

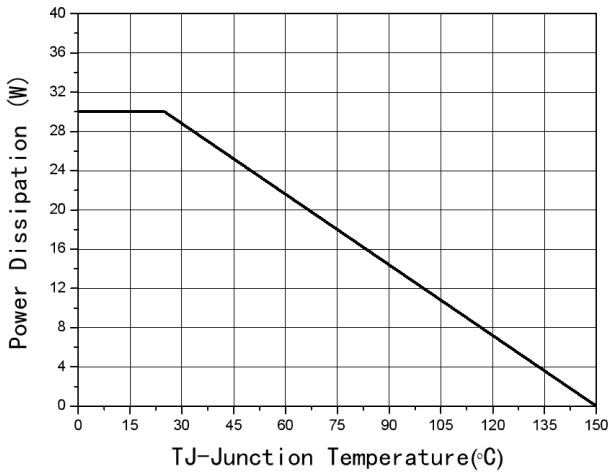


Fig7 Power De-rating

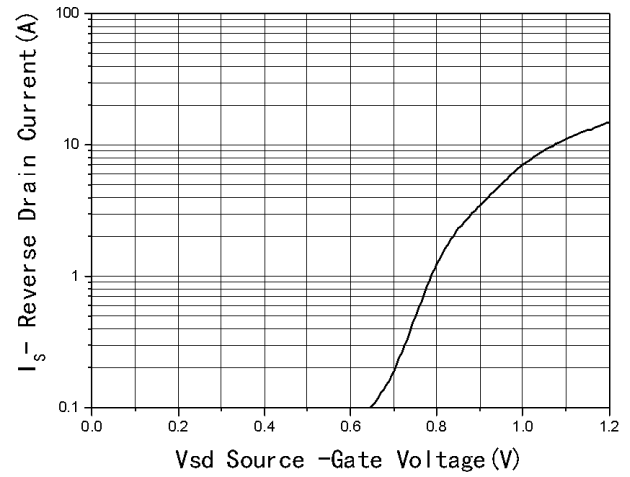


Fig8 Source-Drain Diode Forward

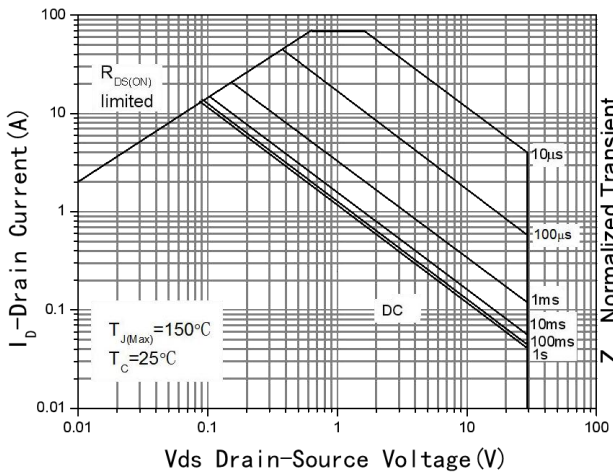


Fig9 Safe Operating Area


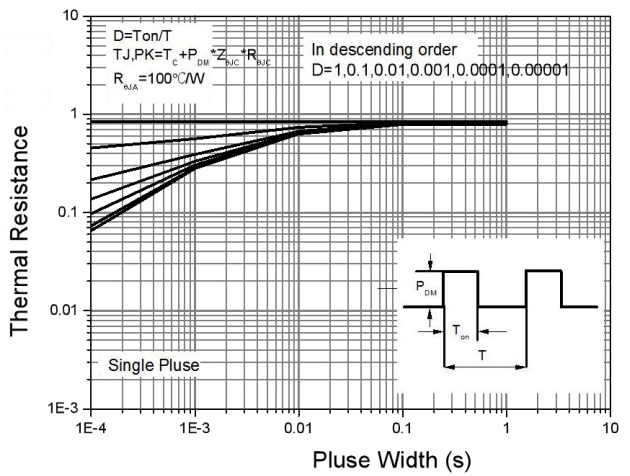


Fig10 Normalized Maximum Transient Thermal Impedance


Package Information

- PDFN5*6-8L-A

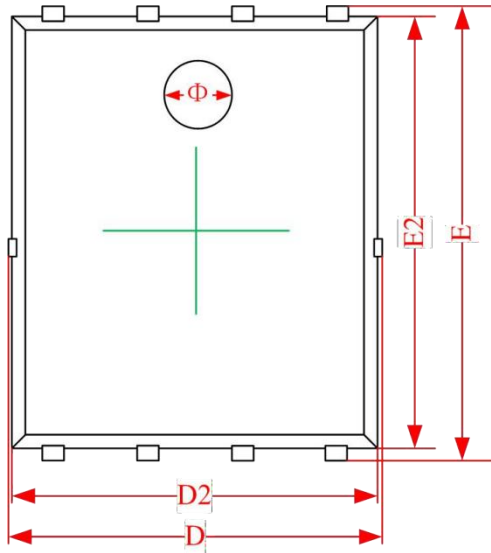
Top View



Bottom View

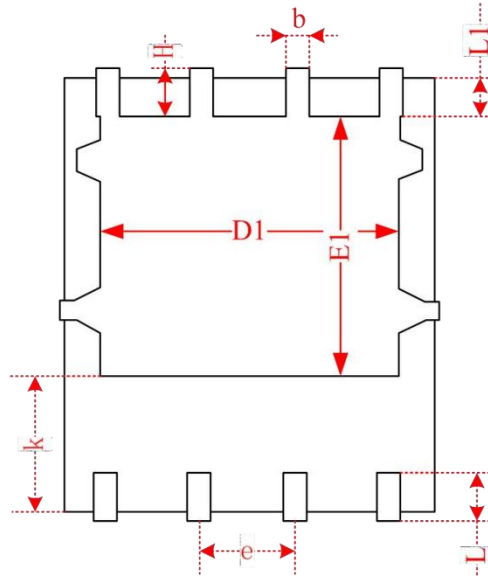

Side View

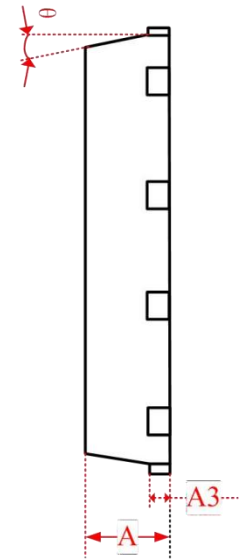

SYMBOLS	DIMENSIONS IN MILLIMETERS			DIMENSIONS IN INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.870	0.900	0.930	0.034	0.035	0.036
A3	0.203REF.			0.008REF.		
D	4.944	5.020	5.096	0.195	0.198	0.201
E	5.974	6.050	6.126	0.235	0.238	0.241
D1	3.910	4.010	4.110	0.154	0.158	0.162
E1	3.375	3.475	3.575	0.133	0.137	0.141
D2	4.870	4.900	4.930	0.192	0.193	0.194
E2	5.720	5.750	5.780	0.226	0.227	0.228
k	1.190	1.290	1.390	0.047	0.051	0.055
b	0.350	0.380	0.410	0.014	0.015	0.016
e	1.270TYP.			0.050TYP.		
L	0.559	0.635	0.711	0.022	0.025	0.028
L1	0.424	0.500	0.576	0.017	0.020	0.023
H	0.574	0.650	0.726	0.023	0.026	0.029
θ	10°	11°	12°	10°	11°	12°
Φ	1.150	1.200	1.250	0.045	0.047	0.049