


DOSING PUMP

TEKBA EML SERIES – Solenoid Dosing Pump



TECHNICAL CHARACTERISTICS

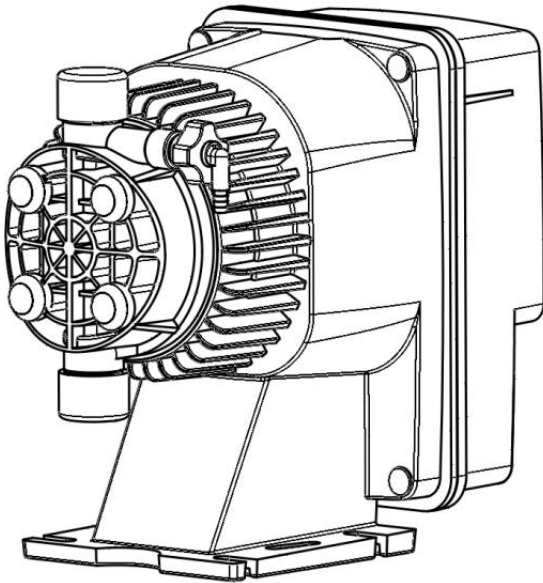

- Flow rates: from 2.5 to 110 l/h
- Max back pressure: up to 20 bar
- Power supply: 100÷240 Vac - 50/60 Hz
- Stroke rate: from 120 to 300 strokes/minute
- Pump head: PVDF
- Diaphragm: PTFE
- External Enclosure: PP reinforced with fiber glass protection degree IP65
- Manually priming valve
- External connectors for all signal inputs

Seko Tekba EML Series is a digital dosing pump with constant flow rate, which is manually adjustable by a keyboard (frequency).

With only 4 sizes this pump can cover a wide range of performances, having a flow rate range from 2.5 to 110 l/h and a back pressure from 0.1 to 20 bar. The power supply is 100÷240 Vac – 50/60 Hz, therefore the same pump can operate with different supply voltage.

The standard pump head is in PVDF, therefore high chemical compatibility with several liquids end. Also, Tekba EML Series is equipped with a manually priming pump for the start up. All the Tekba pumps use convenient connectors external to the pump for signal input, in order to avoid opening the pump to making connections.

The pump is furnished with a complete standard installation kit, which includes: PVDF foot filter and injection valve, PVC suction and bleed tube, PVDF delivery tube.

The ambient temperature at the site of pump installation cannot exceed 40°C, and the relative humidity cannot be above 90%; the pump cannot be installed in a place exposed to sun or bad weather.

DOSING PUMP

TEKBA EML SERIES – Solenoid Dosing Pump



KEY CODE

model									
EML	Digital constant flow rate, manually adjustable. Level control input.								
	hydraulics	Pressure [bar]	Flow rate [l/h]	Capacity cc/stroke	Frequency [stroke/1']	Ø Connections IN / EXT [mm]			
	600	20	2,5	0,35	120	4 / 6			
		18	3	0,42					
		14	4,2	0,58					
		8	7	0,97					
	603	12	4	0,42	160	4 / 6			
		10	5	0,52					
		8	6	0,63					
		2	8	0,83					
	800	16	7	0,38	300	4 / 6			
		10	10	0,55					
		5	15	0,83					
		1	18	1,00					
	803	5	20	1,11	300	8 / 10			
		4	32	1,78					
		2	62	3,44					
		0,1	110	6,11					
stroke length regulation									
	N	without regulation							
power supply									
	N	100÷240 Vac 50/60 Hz							
liquid end									
	H	PVDF							
	A	PVDF - automatic degassing							NOT for 803 hydraulic
	I	SS316L							
installation kit									
	H	PVDF							
	0	WITHOUT kit							only for SS316L liquid end
seals									
	0	FKM-B							
	1	EPDM							
	2	PTFE							
	3	FFKM							NOT for 803 hydraulic - EPDM kit
optional/colour									
	00	electronic - hydraulic							
optional/customization									
	00	standard							
EML	603	N	N	H	H	1	00	00	

DOSING PUMP

TEKBA EML SERIES – Solenoid Dosing Pump




HYDRAULIC CHARACTERISTICS

Pump Model	Pressure [bar]	Flow Rate [l/h]	Frequency max [str./min]	Stroke capacity [cc/str.]	Connection [mm]		Power supply [Vac]	Consumption [W]	
					Suction	Discharge		Min	Max
EML600N	20	2,5	120	0,35	4/6	4/6	100÷240	14,0	19,0
	18	3,0		0,42					
	14	4,2		0,58					
	8	7,0		0,97					
EML603N	12	4,0	160	0,42	4/6	4/6	100÷240	17,0	22,0
	10	5,0		0,52					
	8	6,0		0,63					
	2	8,0		0,83					
EML800N	16	7,0	300	0,39	4/6	4/6	100÷240	22,0	33,0
	10	10,0		0,56					
	5	15,0		0,83					
	1	18,0		1,00					
EML803N	5	20,0	300	1,11	8/10	8/10	100÷240	29,0	37,0
	4	32,0		1,78					
	2	62,0		3,44					
	0,1	110,0		6,11					

* Pressure Data in the table refer to the measured parameters on the plant, including the use of SEKO STANDARD injection fitting.

DIMENSIONS

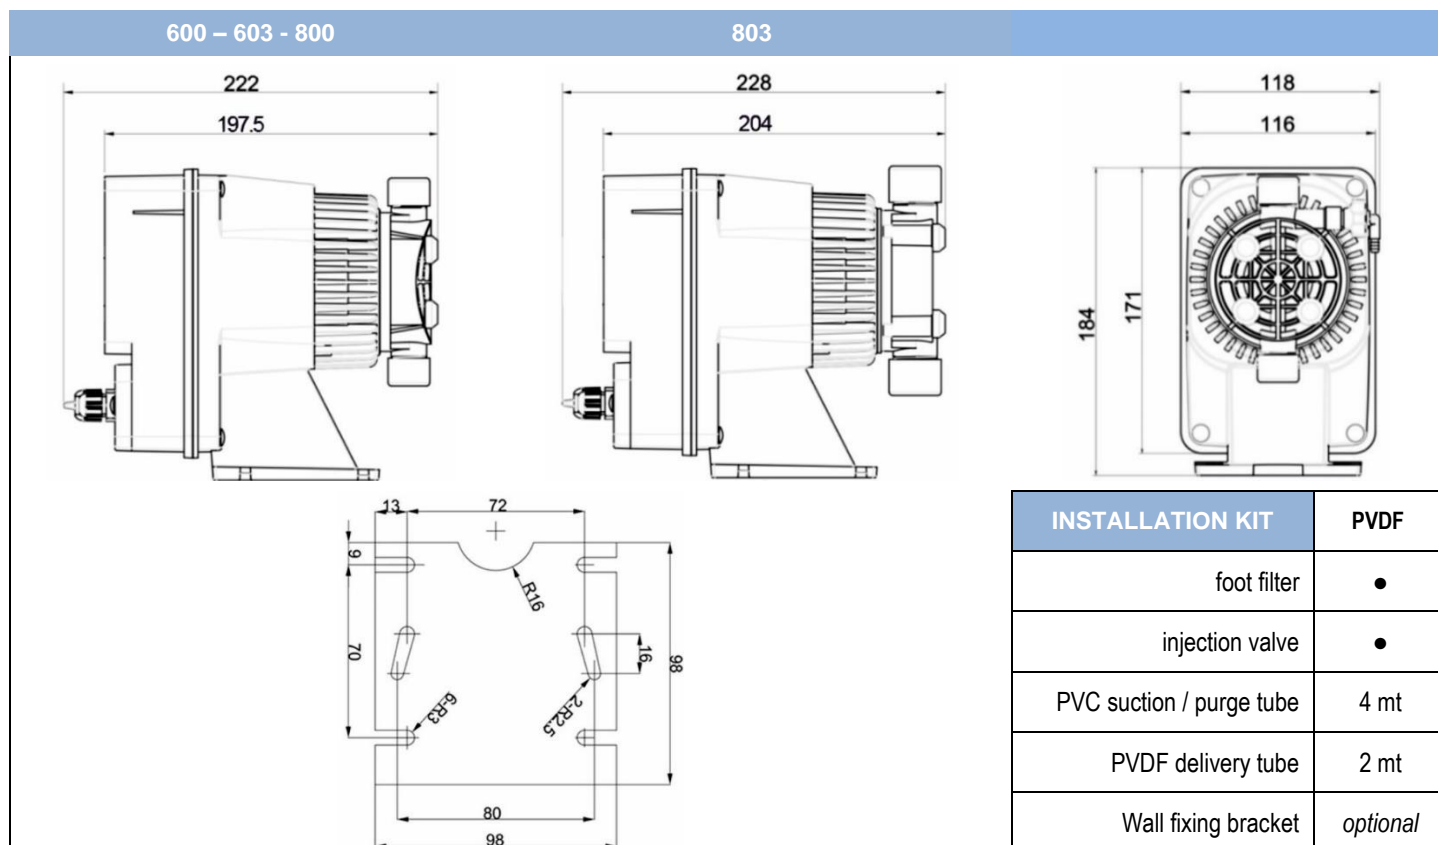

DOSING PUMP

TEKBA EML SERIES – Solenoid Dosing Pump



PERFORMANCE

